


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

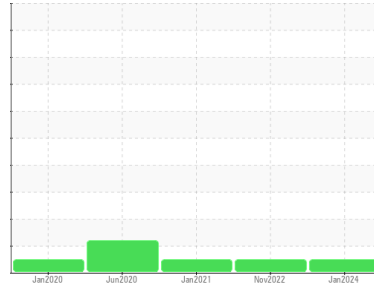

Machine Id  
**ST281**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON UHP 5W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0082056</b>	PC0061512	PC0042296
Sample Date	Client Info			<b>26 Jan 2024</b>	19 Nov 2022	18 Jan 2021
Machine Age	hrs	Client Info		<b>4135</b>	3757	2900
Oil Age	hrs	Client Info		<b>500</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>15</b>	19	8
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Silver	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>1</b>	1	1
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	2	<1
Copper	ppm	ASTM D5185(m)	>330	<b>6</b>	18	2
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	65	<b>31</b>	27	37
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	65	<b>49</b>	56	53
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	1160	<b>943</b>	1093	1022
Calcium	ppm	ASTM D5185(m)	820	<b>920</b>	852	898
Phosphorus	ppm	ASTM D5185(m)	1160	<b>952</b>	1050	985
Zinc	ppm	ASTM D5185(m)	1260	<b>1110</b>	1221	1240
Sulfur	ppm	ASTM D5185(m)	3000	<b>2774</b>	2706	2880
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>4</b>	4	4
Sodium	ppm	ASTM D5185(m)		<b>4</b>	6	4
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	1	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0.2</b>	0.1	0.1
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.5</b>	11.0	8.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>22.0</b>	23.2	20.8

# OIL ANALYSIS REPORT







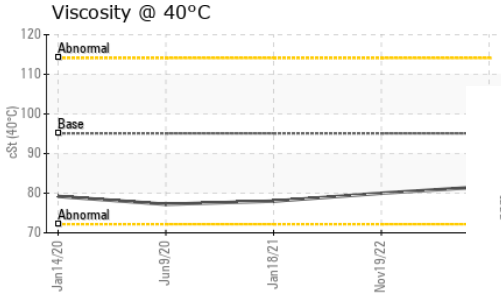
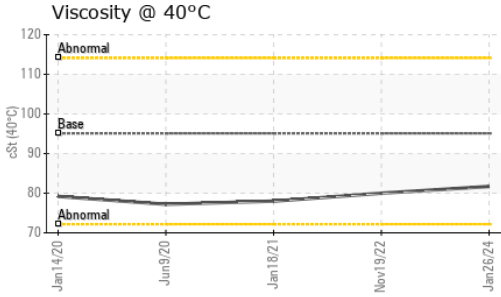


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>19.8</b>	21.5	18.8

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	95.1	<b>81.7</b>	80.0	78.0
Visc @ 100°C	cSt	ASTM D7279(m)	14.3	<b>13.3</b>	13.0	12.7
Viscosity Index (VI)	Scale	ASTM D2270*	169	<b>165</b>	163	162

## GRAPHS

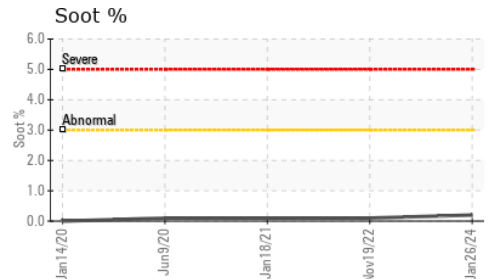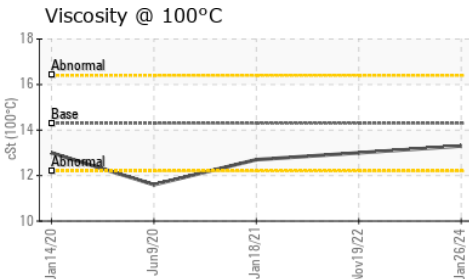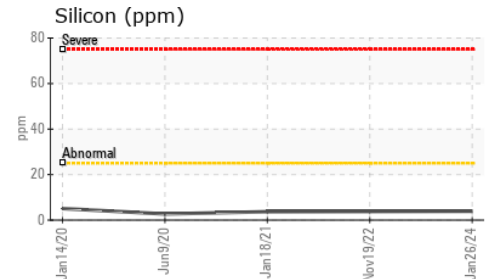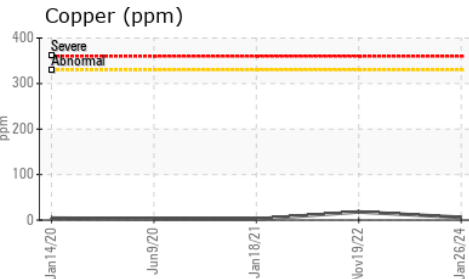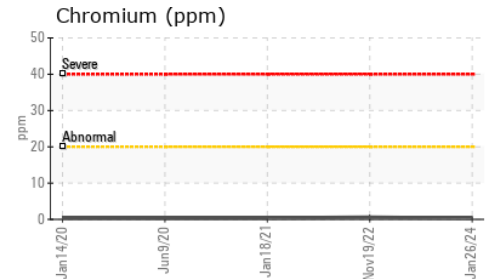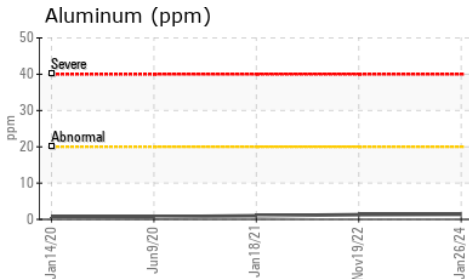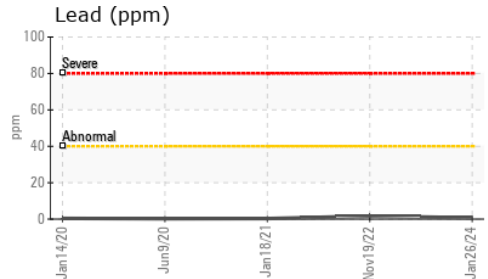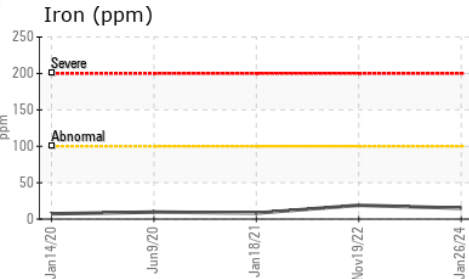

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Green Infrastructure and Partners Inc (GIPI) - 286 - Shoring & Foundations  
**Sample No.** : PC0082056 **Received** : 01 Feb 2024  
**Lab Number** : **02612717** **Diagnosed** : 01 Feb 2024  
**Unique Number** : 5721812 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

151 Ram Forest Rd,  
 Stouffville, ON  
 CA L4A 2G8  
 Contact: Shannon Abbott  
 sabbott@gipi.com  
 T: (905)750-5900  
 F: