

OIL ANALYSIS REPORT

DR193

Component **Auxiliary Winch**

{not provided} (--- LTR)

Sample Rating Trend



DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is Mineral ATF. Please confirm the oil type and grade, and specify the brand of the oil on your next sample. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		,		Jan 2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PC0080455		
Sample Date		Client Info		27 Jan 2024		
Machine Age	hrs	Client Info		468		
Oil Age	hrs	Client Info		250		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG		
WEAR METAL	.S	method	limit/base	current	history1	history2
PQ		ASTM D8184*		18		
Iron	ppm	ASTM D5185(m)	>150	40		
Chromium	ppm	ASTM D5185(m)	>10	<1		
Nickel	ppm	ASTM D5185(m)	>10	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>5	1		
Lead	ppm	ASTM D5185(m)	>15	1		
Copper	ppm	ASTM D5185(m)	>80	33		
Tin	ppm	ASTM D5185(m)		3		
Antimony	ppm	ASTM D5185(m)	>5	0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		116		
Barium	ppm	ASTM D5185(m)		<1		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)		1		
Calcium	ppm	ASTM D5185(m)		52		
Phosphorus	ppm	ASTM D5185(m)		272		
Zinc	ppm	ASTM D5185(m)		17		
Sulfur	ppm	ASTM D5185(m)		1446		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	4		
Sodium	ppm	ASTM D5185(m)		2		
Potassium	ppm	ASTM D5185(m)	>20	10		
FLUID DEGRAI	OITAC	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.98		



OIL ANALYSIS REPORT

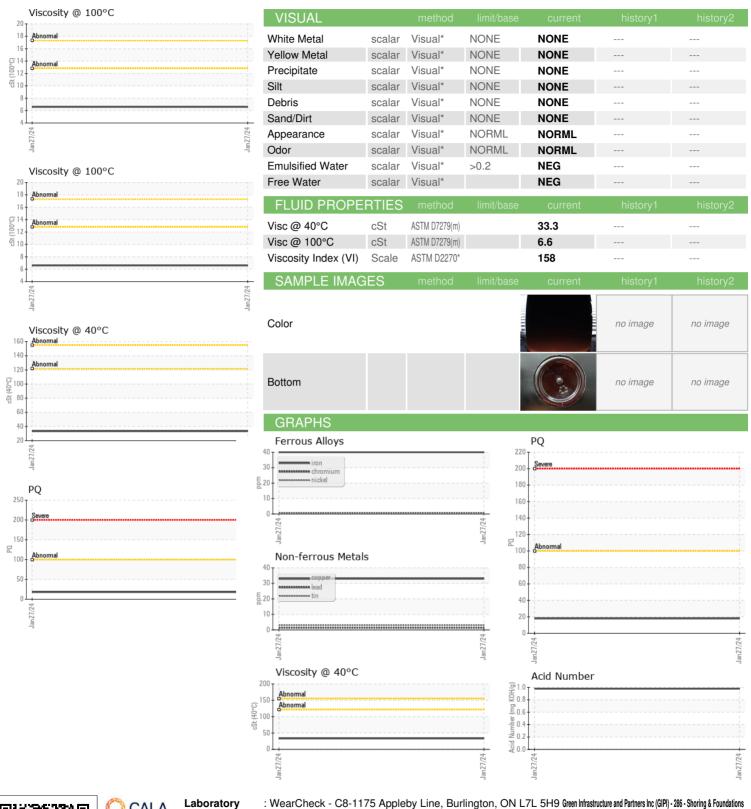



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: PC0080455

: 5721972

: 02612877

Recieved Diagnosed

: 01 Feb 2024 : 03 Feb 2024 : Bill Quesnel

Diagnostician Test Package : IND 2 (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

151 Ram Forest Rd, Stouffville, ON CA L4A 2G8 Contact: Shannon Abbott

sabbott@gipi.com

T: (905)750-5900 F: