


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

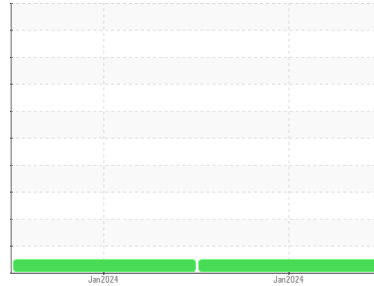

Machine Id
DR193
Component
Auxiliary Winch
Fluid
GEAR OIL ISO 220 (--- LTR)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0080461	PC0080455	---
Sample Date	Client Info			27 Jan 2024	27 Jan 2024	---
Machine Age	hrs	Client Info		468	468	---
Oil Age	hrs	Client Info		250	250	---
Oil Changed	Client Info			Not Chngd	Not Chngd	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	---





WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0	18	---
Iron	ppm	ASTM D5185(m)	>150	2	40	---
Chromium	ppm	ASTM D5185(m)	>10	0	<1	---
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	0	---
Aluminum	ppm	ASTM D5185(m)	>5	<1	1	---
Lead	ppm	ASTM D5185(m)	>15	0	1	---
Copper	ppm	ASTM D5185(m)	>80	<1	33	---
Tin	ppm	ASTM D5185(m)		0	3	---
Antimony	ppm	ASTM D5185(m)	>5	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	50	24	116	---
Barium	ppm	ASTM D5185(m)	15	0	<1	---
Molybdenum	ppm	ASTM D5185(m)	15	0	0	---
Manganese	ppm	ASTM D5185(m)		0	<1	---
Magnesium	ppm	ASTM D5185(m)	50	<1	1	---
Calcium	ppm	ASTM D5185(m)	50	8	52	---
Phosphorus	ppm	ASTM D5185(m)	350	412	272	---
Zinc	ppm	ASTM D5185(m)	100	5	17	---
Sulfur	ppm	ASTM D5185(m)	12500	5584	1446	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	12	4	---
Sodium	ppm	ASTM D5185(m)		<1	2	---
Potassium	ppm	ASTM D5185(m)	>20	<1	10	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.85	0.73	0.98	---


OIL ANALYSIS REPORT

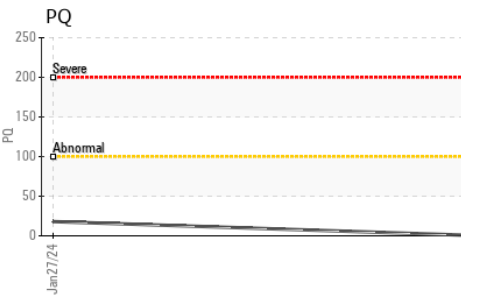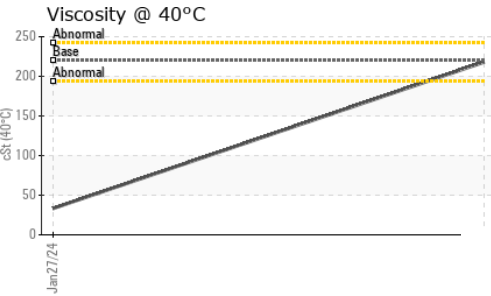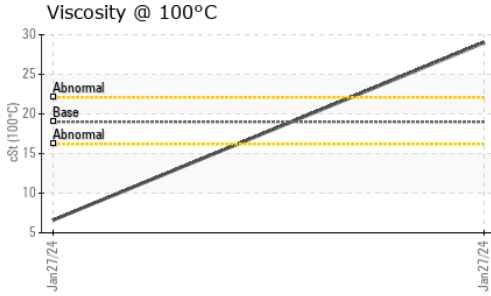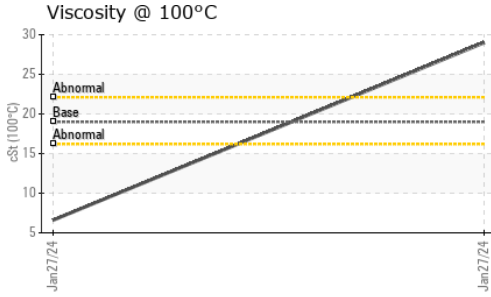






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D2729(m)	220	33.3	---
Visc @ 100°C	cSt	ASTM D2729(m)	19.0	29.0	---
Viscosity Index (VI)	Scale	ASTM D2270*	96	172	158

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

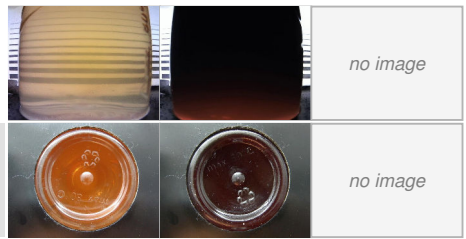

GRAPHS

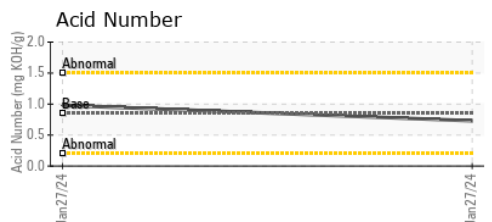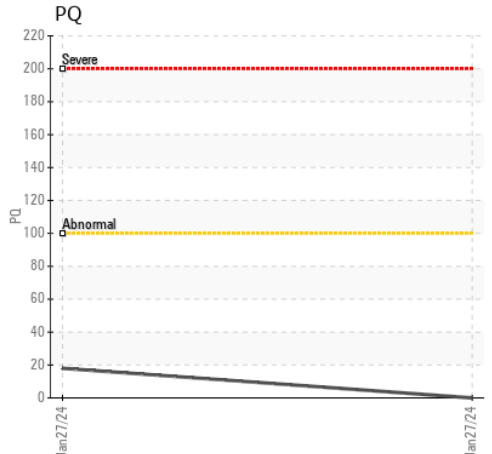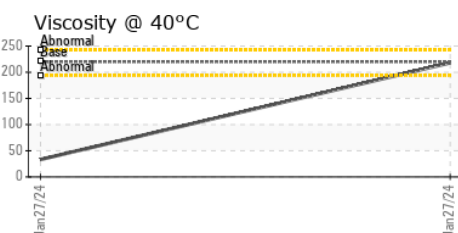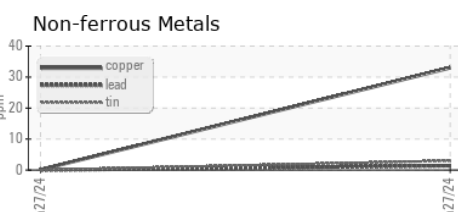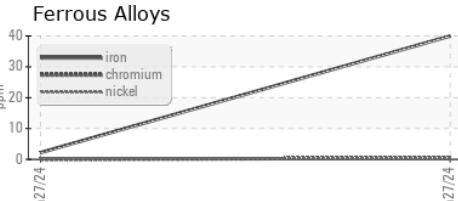

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Green Infrastructure and Partners Inc (GPI) - 286 - Shoring & Foundations
Sample No. : PC0080461 **Received** : 01 Feb 2024
Lab Number : 02612925 **Diagnosed** : 03 Feb 2024
Unique Number : 5722020 **Diagnostician** : Bill Quesnel
Test Package : IND 2 (Additional Tests: KV100, VI)
 To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

151 Ram Forest Rd,
 Stouffville, ON
 CA L4A 2G8
 Contact: Shannon Abbott
 sabbott@gipi.com
 T: (905)750-5900
 F: