

OIL ANALYSIS REPORT

DR193

Component **Right Final Drive**

GEAR OIL ISO 220 (--- LTR)

Sample Rating Trend



DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Jan 2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PC0080451		
Sample Date		Client Info		27 Jan 2024		
Machine Age	hrs	Client Info		468		
Oil Age	hrs	Client Info		250		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
PQ		ASTM D8184*		115		
Iron	ppm	ASTM D5185(m)	>500	38		
Chromium	ppm	ASTM D5185(m)	>10	<1		
Nickel	ppm	ASTM D5185(m)	>10	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>25	1		
Lead	ppm	ASTM D5185(m)	>25	<1		
Copper	ppm	ASTM D5185(m)	>50	6		
Tin	ppm	ASTM D5185(m)	>10	<1		
Antimony	ppm	ASTM D5185(m)	>5	0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	50	24		
Barium	ppm	ASTM D5185(m)	15	8		
Molybdenum	ppm	ASTM D5185(m)	15	0		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)	50	<1		
Calcium	ppm	ASTM D5185(m)	50	18		
Phosphorus	ppm	ASTM D5185(m)	350	437		
Zinc	ppm	ASTM D5185(m)	100	4		
Sulfur	ppm	ASTM D5185(m)	12500	5761		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>75	7		
Sodium	ppm	ASTM D5185(m)		13		
Potassium	ppm	ASTM D5185(m)	>20	2		
FLUID DEGRA	OITAC	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.85	0.78		



OIL ANALYSIS REPORT

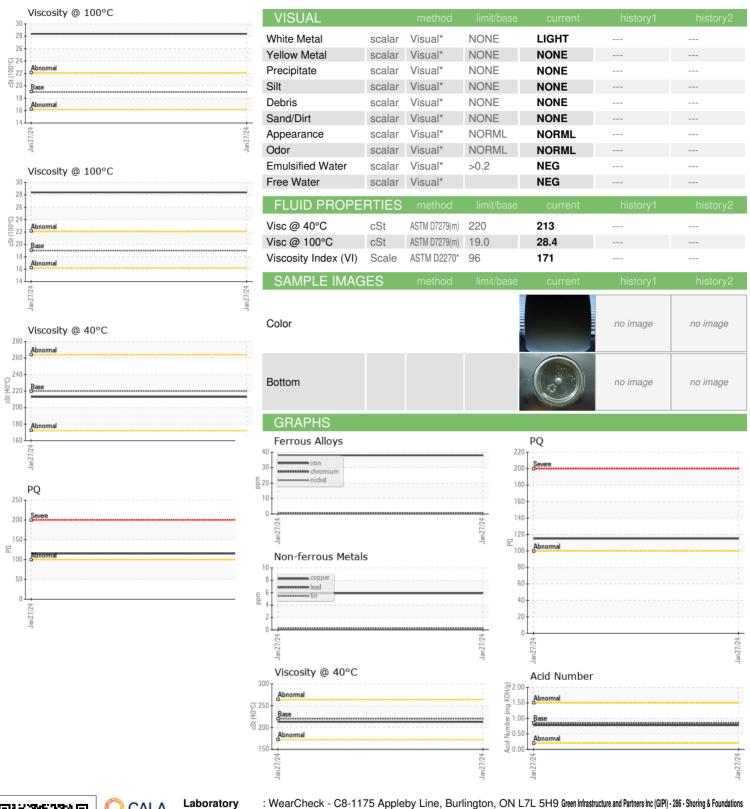



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: PC0080451

: 5722021

: 02612926

Recieved : 01 Feb 2024 Diagnosed : 03 Feb 2024 Diagnostician

: Bill Quesnel Test Package : IND 2 (Additional Tests: KV100, VI)

151 Ram Forest Rd, Stouffville, ON CA L4A 2G8 Contact: Shannon Abbott

To discuss this sample report, contact Customer Service at 1-800-268-2131.

sabbott@gipi.com T: (905)750-5900

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

F: