




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

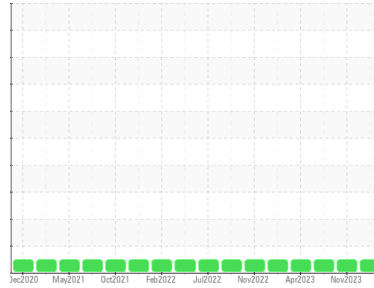

Machine Id  
**910076**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (36 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0097569</b>	GFL0097566	GFL0074304
Sample Date	Client Info		<b>31 Jan 2024</b>	17 Nov 2023	04 Jul 2023
Machine Age	hrs	Client Info	<b>9689</b>	9141	0
Oil Age	hrs	Client Info	<b>9141</b>	546	0
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>120	<b>8</b>	9	10
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	<1	1
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>3</b>	5	4
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>59</b>	60	59
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	1010	<b>965</b>	969	977
Calcium	ppm	ASTM D5185(m)	1070	<b>1059</b>	1086	1042
Phosphorus	ppm	ASTM D5185(m)	1150	<b>988</b>	967	1007
Zinc	ppm	ASTM D5185(m)	1270	<b>1159</b>	1195	1182
Sulfur	ppm	ASTM D5185(m)	2060	<b>2554</b>	2343	2314
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>3</b>	3	3
Sodium	ppm	ASTM D5185(m)		<b>3</b>	4	4
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	0	<1

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>4	<b>0.4</b>	0.4	0.5
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.5</b>	7.1	7.8
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>19.5</b>	19.4	20.2



# OIL ANALYSIS REPORT

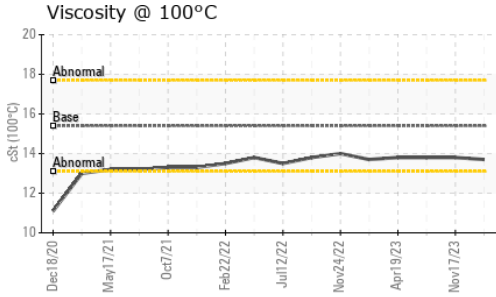

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	14.1	15.7









### VISUAL

	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

### FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.8	13.8

### GRAPHS

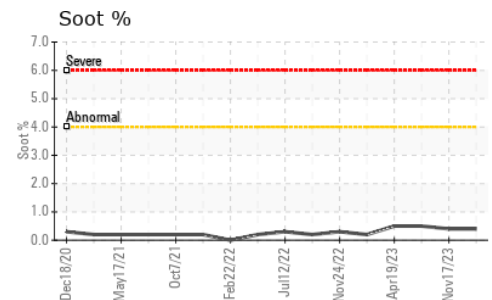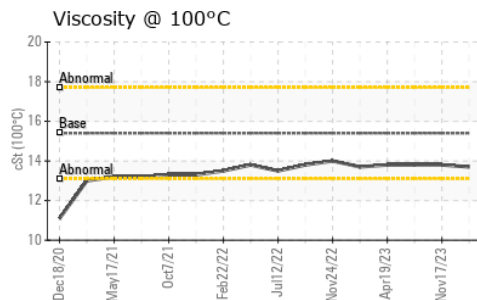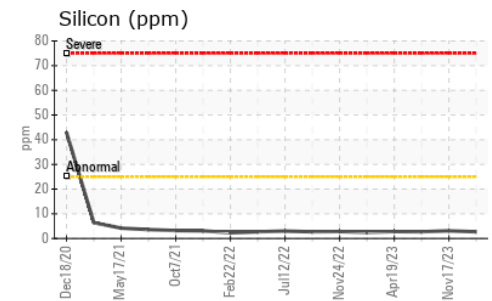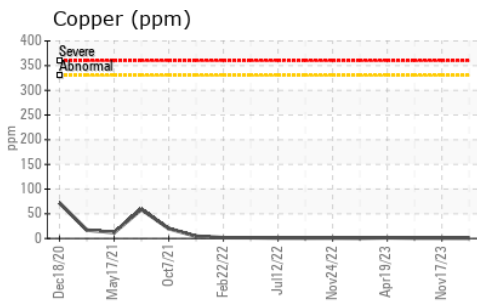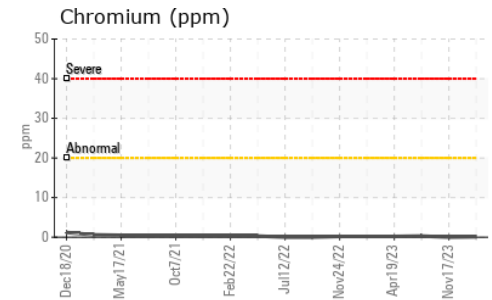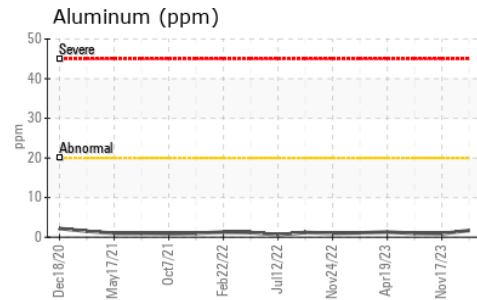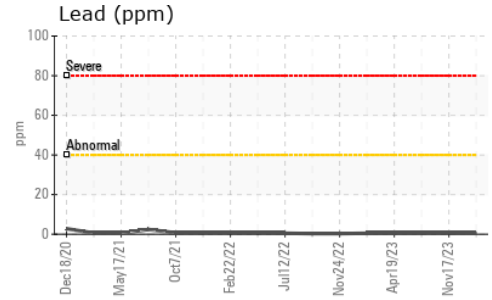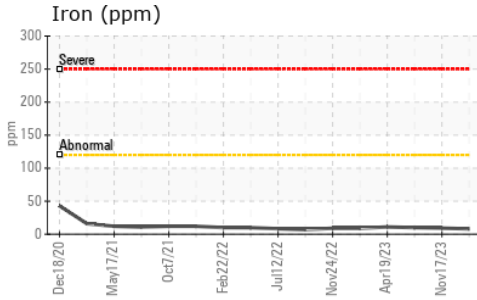

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0097569 **Received** : 02 Feb 2024  
**Lab Number** : 02613040 **Diagnosed** : 02 Feb 2024  
**Unique Number** : 5722135 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**GFL Environmental - 216**  
 15 Bermondsey Road  
 Toronto, ON  
 CA M4B 1Y9  
 Contact: Tom Hatzioannidis  
 thatzioannidis@gflenv.com  
 T: (416)678-9340  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.