

OIL ANALYSIS REPORT

Sample Rating Trend





DIAGNOSIS

Recommendation

Contamination

acceptable.

Fluid Condition

Wear


Component **Reciprocating Compressor**


PETRO CANADA SENTRON LD SYNTHETIC BLEND (--- LTR)

SAMPLE INFORMATION method PC0085487 Sample Number **Client Info** Resample at the next service interval to monitor. 22 Jan 2024 Sample Date Client Info 27655 Machine Age hrs **Client Info** All component wear rates are normal. Oil Age hrs Client Info 0 Oil Changed **Client Info** Changed NORMAL Sample Status The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is WEAR METALS negligible. The system and fluid cleanliness is ASTM D5185(m) >50 1 Iron ppm Chromium ppm ASTM D5185(m) >10 0 The AN level is acceptable for this fluid. The Nickel ppm ASTM D5185(m) 0 condition of the oil is suitable for further service. ASTM D5185(m) Titanium 0 ppm Silver ppm ASTM D5185(m) 0 Aluminum ASTM D5185(m) >25 2 ppm >25 2 Lead ASTM D5185(m) ppm ASTM D5185(m) 28 Copper >50 ppm Tin ppm ASTM D5185(m) >15 <1 Antimony ASTM D5185(m) 0 ppm Vanadium ppm ASTM D5185(m) 0 Beryllium ASTM D5185(m) 0 ppm Cadmium ASTM D5185(m) 0 ppm ADDITIVES 0 1 Boron ppm ASTM D5185(m) 0 Barium ppm ASTM D5185(m) O Molybdenum ASTM D5185(m) 0 ppm <1 0 Manganese ppm ASTM D5185(m) O Magnesium ppm ASTM D5185(m) 3 8 Calcium ppm ASTM D5185(m) 1402 1346 Phosphorus 246 264 ppm ASTM D5185(m) Zinc ppm ASTM D5185(m) 305 305 Sulfur 2310 2438 ppm ASTM D5185(m) Lithium ASTM D5185(m) <1 ppm CONTAMINANTS 2 Silicon ASTM D5185(m) >25 ppm Sodium ASTM D5185(m) ppm <1 Potassium ppm ASTM D5185(m) >20 <1 Water % ASTM D6304* >0.1 0.002 ppm Water ASTM D6304* >1000 25 ppm **INFRA-RED** Soot % % ASTM D7844* 0 Nitration Abs/cm ASTM D7624* 2.9 Nitration(Diff) ASTM E2412* 0.7 Abs/cm 14.7 Sulfation Abs/.1mm ASTM D7415* Sulfation(Diff) Abs/cm ASTM E2412* 1.1



OIL ANALYSIS REPORT

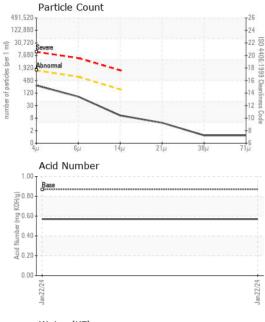

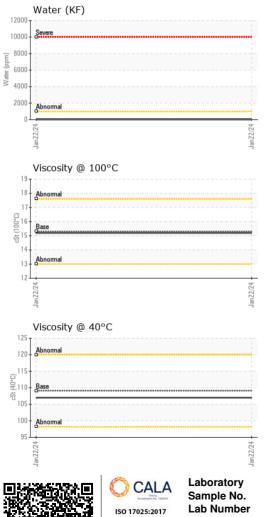

	ASTM D7647	>1300	245		
	ASTM D7647	>640	72		
	ASTM D7647	>160	9		
	ASTM D7647	>40	4		
	ASTM D7647	>10	1		
	ASTM D7647	>3	1		
	ISO 4406 (c)	>17/16/14	15/13/10		
ATION	method	limit/base	current	history1	history2
Abs/.1mm	ASTM D7414*		8.5		
Abs/cm	ASTM E2412*		2.1		
mg KOH/g	ASTM D974*	0.87	0.57		
	method	limit/base	current	history1	history2
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NORML	NORML		
scalar	Visual*	NORML	NORML		
scalar	Visual*	>0.1	NEG		
scalar	Visual*		NEG		
RTIES	method	limit/base	current	history1	history2
cSt	ASTM D7279(m)	109.1	107		
cSt	ASTM D7279(m)	15.3	15.2		
Scale	ASTM D2270*	153	149		
ES	method	limit/base	current	history1	history2
	Abs/.1mm Abs/cm mg KOH/g scalar scalar scalar scalar scalar scalar scalar scalar scalar scalar scalar scalar scalar scalar	ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ISO 4406 (c) ASTM D7440 (c) Abs/.tmm ASTM D7414* Abs/cm ASTM D7414* Abs/cm ASTM D974* Cocalar Visual* Scalar ASTM D7279(m) Scale ASTM D7279(m)	ASTM D7647>160ASTM D7647>40ASTM D7647ASTM D7647>10ASTM D7647>3ISO 4406 (c)>17/16/14ASTM D7647>3ISO 4406 (c)>17/16/14ASTM D76473ASTM D7414*Abs/.1mmASTM D7414*Abs/.0mmASTM D2412*Mg KOH/gASTM D974*0.870.87scalarVisual*Visual*NONEscalarVisual*NONEScalarVisual*NONEscalarVisual*NONEScalarVisual*NONEscalarVisual*NONEScalarVisual*NONEscalarVisual*NORMLScalarVisual*NORMLscalarVisual*ScalarVisual*ScalarVisual*ScalarVisual*ScalarVisual*ScalarVisual*ScalarVisual*ScalarVisual*ScalarVisual*ScalarVisual*ScalarVisual*ScalarSisual*ScalarSisual*ScalarSisual*ScalarSisual*ScalarSisual*ScalarSisual*ScalarSisual*ScalarSisual*ScalarSisual*ScalarSisual*ScalarSisual*ScalarSisual*ScalarSi	ASTM D7647>1609ASTM D7647>404ASTM D7647>101ASTM D7647>31ISO 4406 (c)>17/16/1415/13/10ASTM D7647>31ISO 4406 (c)>17/16/1415/13/10ATIONmethodlimit/basecurrentAbs/.mmASTM D7414*8.5Abs/.mmASTM D7414*8.5Abs/cmASTM D974*0.870.57methodlimit/basecurrentscalarVisual*NONENONEscalarVisual*NONENONEscalarVisual*NONENONEscalarVisual*NONENONEscalarVisual*NONENONEscalarVisual*NONENONEscalarVisual*NONENONEscalarVisual*NORMLNORMLscalarVisual*NORMLNORMLscalarVisual*NORMLNORMLscalarVisual*NORMLNORMLscalarVisual*>0.1NEGscalarVisual*>0.1NEGscalarVisual*109.1107cStASTM D7279(m)15.315.2ScaleASTM D2270*153149	ASTM D7647 >160 9 ASTM D7647 >40 4 ASTM D7647 >10 1 ASTM D7647 >3 1 ASTM D7647 >3 1 ISO 4406 (c) >17/16/14 15/13/10 ASTM D7647 >3 1 ISO 4406 (c) >17/16/14 15/13/10 ASTM D7414* 8.5 Abs/cm ASTM D7414* 8.5 Abs/cm ASTM D974* 0.87 0.57 scalar Visual* NONE NONE scalar Visual* NONE NONE scalar Visual* NONE NONE scalar Visual* NONE NONE scalar Visual* NORML NORML scalar Visual* NORML NORML scalar Visual* NORML NORML <

Color		no image	no image
Bottom		no image	no image

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Sample No. : PC0085487 Recieved : 02 Feb 2024 Lab Number : 02613131 Diagnosed : 05 Feb 2024 Unique Number : 5722226 Diagnostician : Bill Quesnel Laboratory : PLANT (Additional Tests: FT-IR, FT-IR(Diff), KF, KV100, VI) To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

NuVista Energy 10508 67 Ave, #201 Grande Prairie, AB CA T8W 0K8 Contact: Eldon Weaver eweaver@nvaenergy.com T: F:

Report Id: NUVGRA [WCAMIS] 02613131 (Generated: 02/05/2024 15:57:29) Rev: 3

Submitted By: Kris Dickmann Page 2 of 2