



Machine Id  
**CPH NO UNIT PC0058629**

Component  
**Gearbox**  
Fluid

**PETRO CANADA PURITY FG EP GEAR OIL 320 (114 LTR)**

**DIAGNOSIS**

**Recommendation**

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

**Wear**

Les taux d'usure de tous les composants sont normaux.

**Contamination**

Il n'y a aucun indice de contamination dans l'huile.

**Fluid Condition**

Le AN est acceptable pour ce fluide. L'état de l'huile permet d'en prolonger l'utilisation.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0058629</b>	---	---
Sample Date	Client Info			<b>31 Jan 2024</b>	---	---
Machine Age	hrs	Client Info		<b>300000</b>	---	---
Oil Age	hrs	Client Info		<b>30000</b>	---	---
Oil Changed	Client Info			<b>Filtered</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	---	---





WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		<b>0</b>	---	---
Iron	ppm	ASTM D5185(m)	>200	<b>2</b>	---	---
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m)	>50	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>200	<b>3</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<b>1</b>	---	---
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Calcium	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	141	<b>93</b>	---	---
Zinc	ppm	ASTM D5185(m)	0	<b>8</b>	---	---
Sulfur	ppm	ASTM D5185(m)	690	<b>535</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	<b>6</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.51	<b>0.32</b>	---	---

# OIL ANALYSIS REPORT

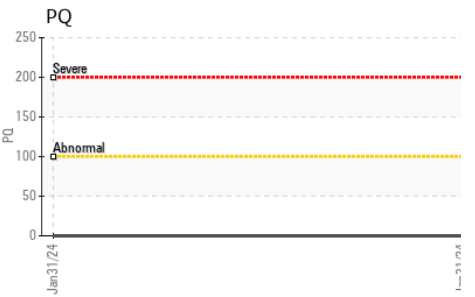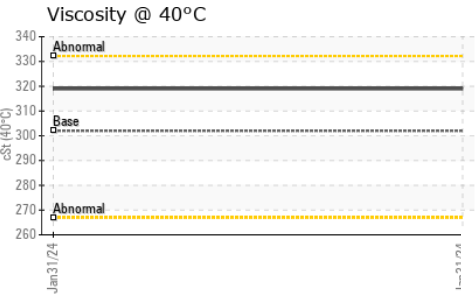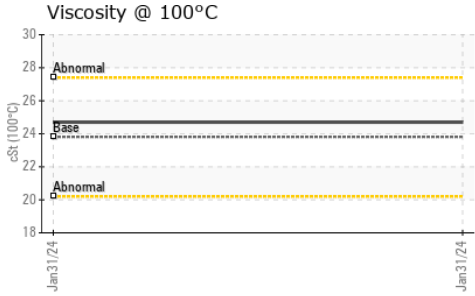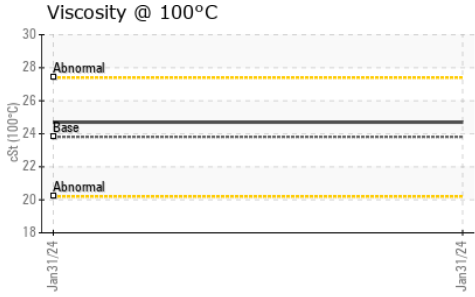






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	302.0	319	---
Visc @ 100°C	cSt	ASTM D7279(m)	23.81	24.7	---
Viscosity Index (VI)	Scale	ASTM D2270*	99	99	---

## SAMPLE IMAGES

	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

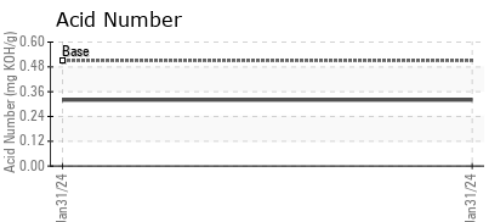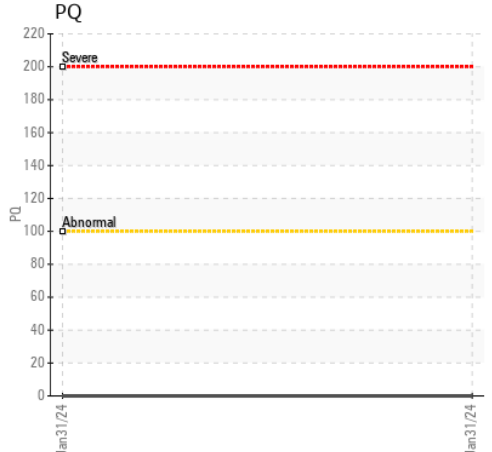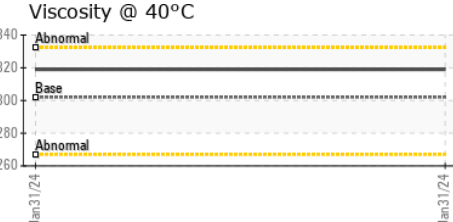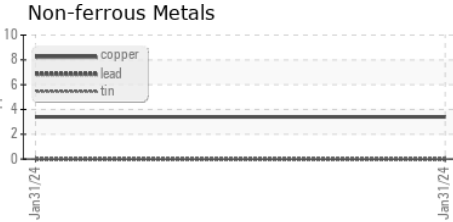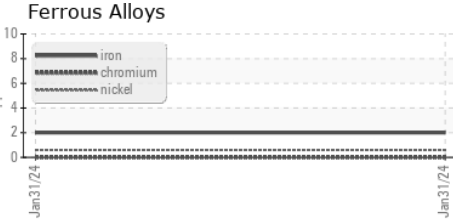

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0058629 **Received** : 02 Feb 2024  
**Lab Number** : 02613257 **Tested** : 06 Feb 2024  
**Unique Number** : 5722352 **Diagnosed** : 06 Feb 2024 - Wes Davis  
**Test Package** : IND 2 ( Additional Tests: KV100, VI )

**COOP. AGRIZONE AGISKA**  
 79 RUE PRINCIPALE  
 ST-DAMASE, QC  
 CA J0H 1J0  
 Contact: Andres Gonzalez  
 andres5.gonzales@agiska.coop  
 T: (450)502-7363  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.