




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

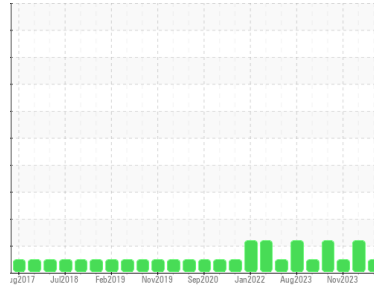

Machine Id
901014
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (19 LTR)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | GFL0111764 | GFL0107116 | WC0875086 |
| Sample Date | Client Info | | 31 Jan 2024 | 24 Jan 2024 | 22 Nov 2023 |
| Machine Age | hrs | Client Info | 247017 | 247017 | 15189 |
| Oil Age | hrs | Client Info | 0 | 600 | 0 |
| Oil Changed | Client Info | | Not Chngd | Changed | Not Chngd |
| Sample Status | | | NORMAL | ABNORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | 0.0 |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|--------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) >120 | 2 | 4 | 2 |
| Chromium | ppm | ASTM D5185(m) >20 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185(m) >5 | 0 | <1 | 0 |
| Titanium | ppm | ASTM D5185(m) >2 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) >2 | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185(m) >20 | 1 | 2 | 1 |
| Lead | ppm | ASTM D5185(m) >40 | 0 | <1 | <1 |
| Copper | ppm | ASTM D5185(m) >330 | <1 | <1 | <1 |
| Tin | ppm | ASTM D5185(m) >15 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|--------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) 0 | 13 | 21 | 32 |
| Barium | ppm | ASTM D5185(m) 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) 60 | 58 | 58 | 60 |
| Manganese | ppm | ASTM D5185(m) 0 | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185(m) 1010 | 921 | 882 | 923 |
| Calcium | ppm | ASTM D5185(m) 1070 | 1017 | 1010 | 1040 |
| Phosphorus | ppm | ASTM D5185(m) 1150 | 986 | 968 | 1010 |
| Zinc | ppm | ASTM D5185(m) 1270 | 1135 | 1147 | 1171 |
| Sulfur | ppm | ASTM D5185(m) 2060 | 2734 | 2600 | 2629 |
| Lithium | ppm | ASTM D5185(m) | <1 | <1 | <1 |

CONTAMINANTS


| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185(m) >25 | 2 | 2 | 3 |
| Sodium | ppm | ASTM D5185(m) | <1 | <1 | 1 |
| Potassium | ppm | ASTM D5185(m) >20 | <1 | <1 | 0 |
| Fuel | % | ASTM D7593* >3.0 | 1.5 | ▲ 3.9 | 1.6 |

INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | ASTM D7844* >4 | 0 | 0 | 0 |
| Nitration | Abs/cm | ASTM D7624* >20 | 5.2 | 8.4 | 5.2 |
| Sulfation | Abs./1mm | ASTM D7415* >30 | 17.9 | 19.5 | 18.6 |



OIL ANALYSIS REPORT

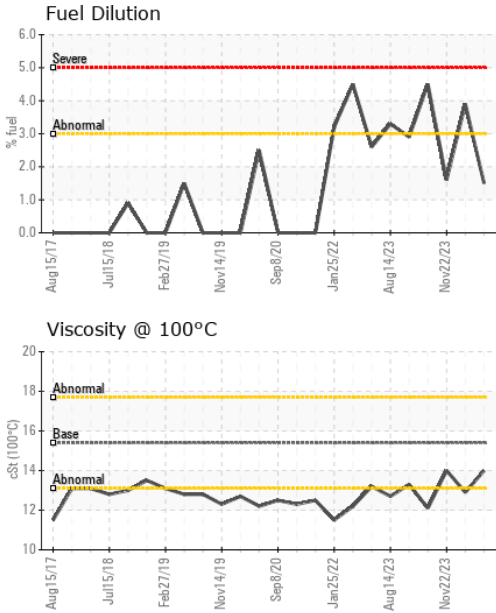


| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs./1mm | ASTM D7414* | >25 | 13.2 | 15.5 | 13.5 |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | Visual* | NONE | NONE | --- | --- |
| Yellow Metal | scalar | Visual* | NONE | NONE | --- | --- |
| Precipitate | scalar | Visual* | NONE | VLITE | --- | --- |
| Silt | scalar | Visual* | NONE | NONE | --- | --- |
| Debris | scalar | Visual* | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | Visual* | NONE | NONE | --- | --- |
| Appearance | scalar | Visual* | NORML | NORML | --- | --- |
| Odor | scalar | Visual* | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.2 | NEG | NEG | .2% |
| Free Water | scalar | Visual* | | NEG | NEG | NEG |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|------------------|-----|---------------|------------|-------------|----------|----------|
| Visc @ 100°C | cSt | ASTM D7279(m) | 15.4 | 14.0 | ▲ 12.9 | 14.0 |

GRAPHS

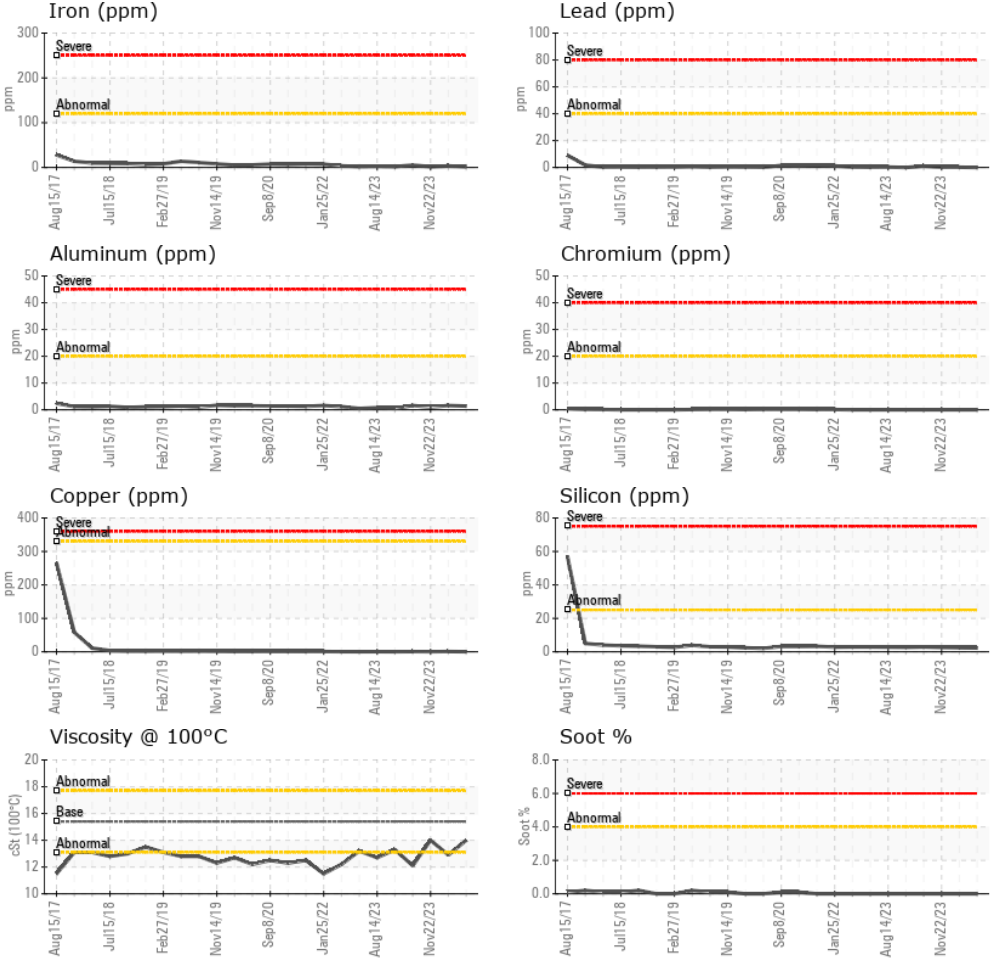

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0111764 **Received** : 05 Feb 2024
Lab Number : 02613362 **Diagnosed** : 06 Feb 2024
Unique Number : 5722457 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel, Visual)

*To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.*

GFL Environmental - 217 - Aurora
 14131 BAYVIEW AVE, AURORA YARD
 AURORA, ON
 CA L4G 0K6
 Contact: Mike Havens
 MHavens@gflenv.com
 T:
 F: (905)713-2445