




OIL ANALYSIS REPORT

Sample Rating Trend

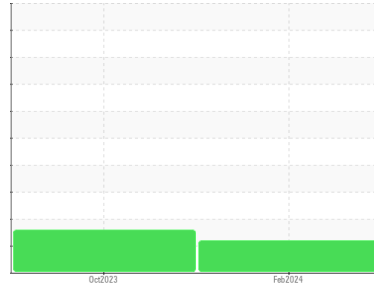

FUEL



Machine Id
Ford F350
 Component
Diesel Engine
 Fluid
SAE 10W40 (--- GAL)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0100588	GFL0077012	---
Sample Date	Client Info		01 Feb 2024	04 Oct 2023	---
Machine Age	kms	Client Info	219236	203573	---
Oil Age	kms	Client Info	0	0	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ABNORMAL	ABNORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	36	49	---
Chromium	ppm	ASTM D5185(m) >20	1	2	---
Nickel	ppm	ASTM D5185(m) >4	<1	<1	---
Titanium	ppm	ASTM D5185(m)	0	0	---
Silver	ppm	ASTM D5185(m) >3	0	<1	---
Aluminum	ppm	ASTM D5185(m) >20	4	5	---
Lead	ppm	ASTM D5185(m) >40	<1	<1	---
Copper	ppm	ASTM D5185(m) >330	2	3	---
Tin	ppm	ASTM D5185(m) >15	0	0	---
Antimony	ppm	ASTM D5185(m)	0	0	---
Vanadium	ppm	ASTM D5185(m)	0	0	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	1	2	---
Barium	ppm	ASTM D5185(m)	0	<1	---
Molybdenum	ppm	ASTM D5185(m)	54	55	---
Manganese	ppm	ASTM D5185(m)	0	0	---
Magnesium	ppm	ASTM D5185(m)	863	828	---
Calcium	ppm	ASTM D5185(m)	969	909	---
Phosphorus	ppm	ASTM D5185(m)	877	861	---
Zinc	ppm	ASTM D5185(m)	1067	1019	---
Sulfur	ppm	ASTM D5185(m)	2474	2237	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---

CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	10	▲ 40	---
Sodium	ppm	ASTM D5185(m) >401	2	3	---
Potassium	ppm	ASTM D5185(m) >20	<1	0	---
Fuel	%	ASTM D7593* >5	▲ 5.6	<1.0	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	0.9	1	---
Nitration	Abs/cm	ASTM D7624* >20	14.6	15.6	---
Sulfation	Abs/.1mm	ASTM D7415* >30	24.8	29.9	---



OIL ANALYSIS REPORT

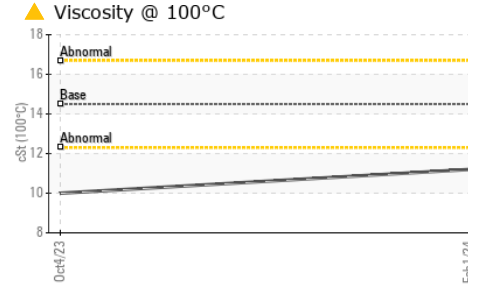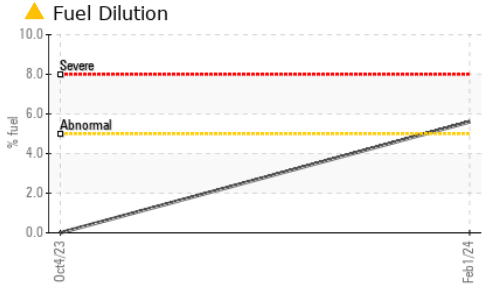

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs./1mm ASTM D7414*	>25	26.4	34.3	---









VISUAL

method	limit/base	current	history1	history2	
Emulsified Water	scalar Visual*	>0.2	NEG	NEG	---
Free Water	scalar Visual*	NEG	NEG	---	

FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 100°C	cSt ASTM D7279(m)	14.5	▲ 11.2	10.0	---

GRAPHS

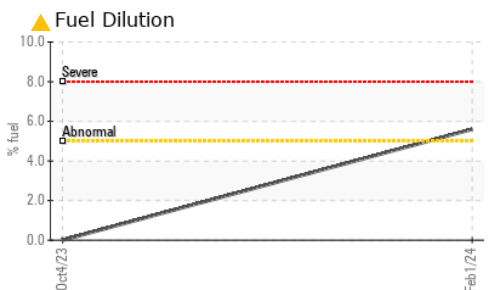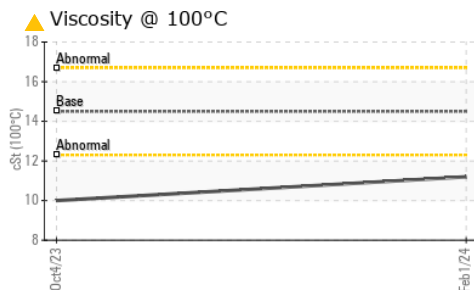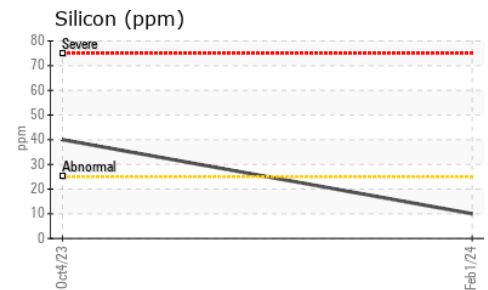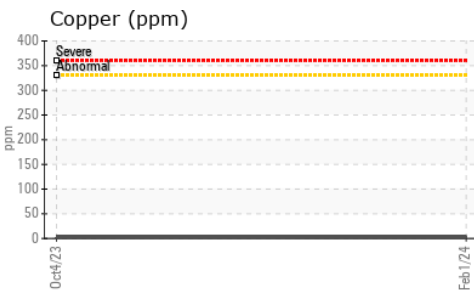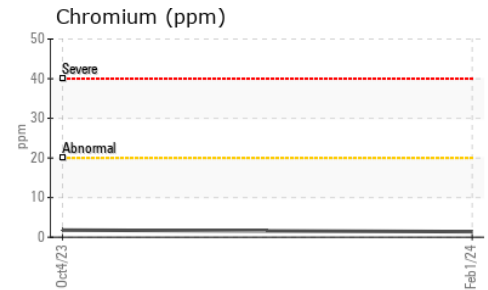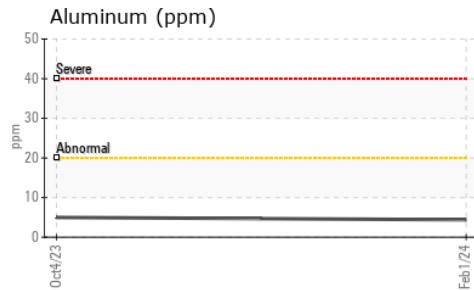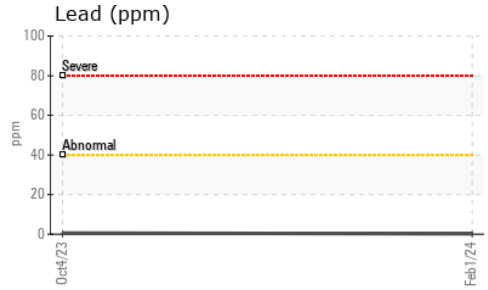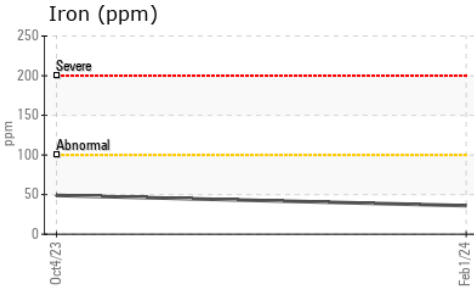

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 575 - Squamish Hauling**
Sample No. : GFL0100588 **Received** : 06 Feb 2024 38950 Queens Way,
Lab Number : 02613644 **Tested** : 07 Feb 2024 Squamish, BC
Unique Number : 5722739 **Diagnosed** : 07 Feb 2024 - Kevin Marson CA V8B 0K8
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel) Contact: Dean Imbeau
dimbeau@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
Validity of results and interpretation are based on the sample and information as supplied.

T: (604)892-5604
F: (604)892-5238