




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**GFL207**  
Machine Id  
**4605**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (36 LTR)**

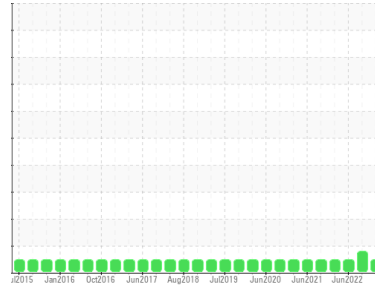

## DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0097578</b>	GFL0072996	GFL0050693
Sample Date	Client Info		<b>06 Feb 2024</b>	06 Mar 2023	16 Jun 2022
Machine Age	hrs	Client Info	<b>23898</b>	21652	19840
Oil Age	hrs	Client Info	<b>1083</b>	0	19840
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	MARGINAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	▲ 2.2	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>120	<b>25</b>	43	6
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>6</b>	9	3
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	4	<1
Copper	ppm	ASTM D5185(m)	>330	<b>3</b>	4	1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>14</b>	6	4
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>33</b>	76	58
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	<b>64</b>	141	1000
Calcium	ppm	ASTM D5185(m)	1070	<b>2056</b>	1951	1037
Phosphorus	ppm	ASTM D5185(m)	1150	<b>887</b>	934	1057
Zinc	ppm	ASTM D5185(m)	1270	<b>1020</b>	1036	1201
Sulfur	ppm	ASTM D5185(m)	2060	<b>3048</b>	2735	2523
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0

## CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>5</b>	6	3
Sodium	ppm	ASTM D5185(m)		<b>5</b>	7	2
Potassium	ppm	ASTM D5185(m)	>20	<b>14</b>	19	4

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>4	<b>0.6</b>	0.7	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>11.6</b>	14.6	7.6
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>26.6</b>	33.6	21.0



# OIL ANALYSIS REPORT







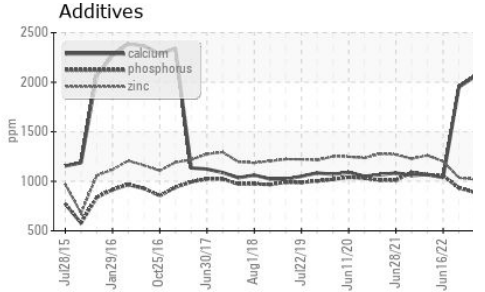
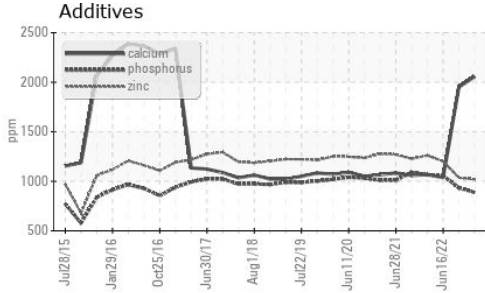


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>18.7</b>	26.8	15.3

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>13.2</b>	12.6	13.6

## GRAPHS

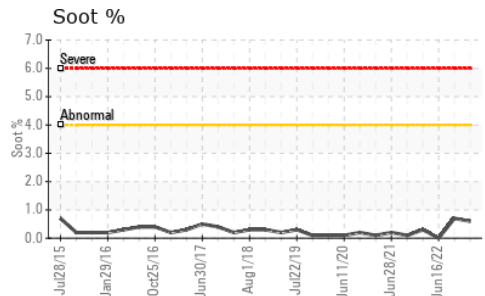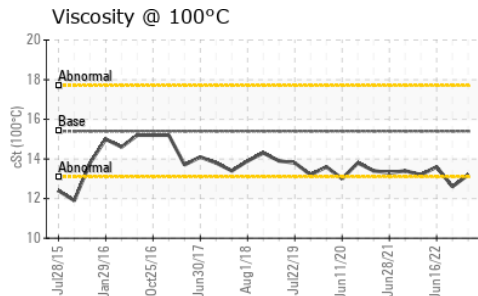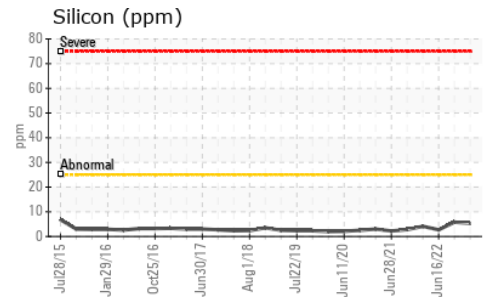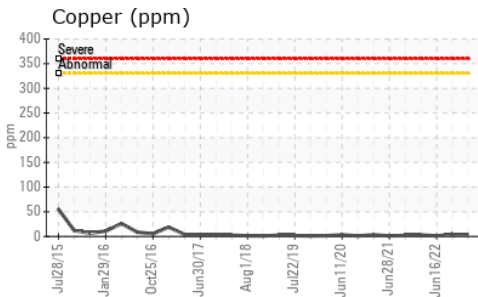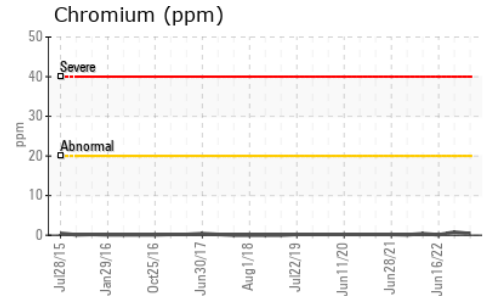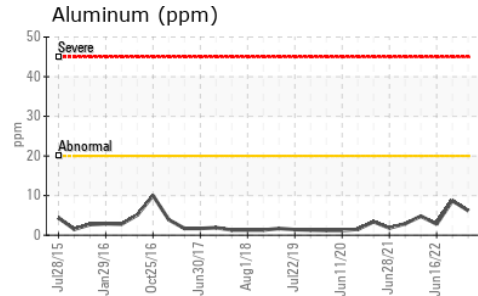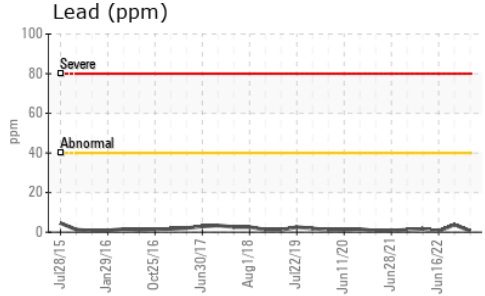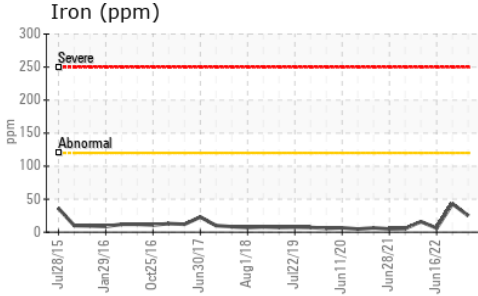

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0097578 **Received** : 08 Feb 2024  
**Lab Number** : **02614237** **Tested** : 08 Feb 2024  
**Unique Number** : 5723332 **Diagnosed** : 08 Feb 2024 - Wes Davis  
**Test Package** : MOB 1

**GFL Environmental - 216**  
 15 Bermondsey Road  
 Toronto, ON  
 CA M4B 1Y9  
 Contact: Tom Hatzioannidis  
 thatzioannidis@gflenv.com  
 T: (416)678-9340  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.