


PROBLEM SUMMARY

Sample Rating Trend


ISO



Area
[450255637]
 Machine Id
PB-04002-HA HOISTING PUMP MID CRANE
 Component
Hydraulic System
 Fluid
{not provided} (--- GAL)

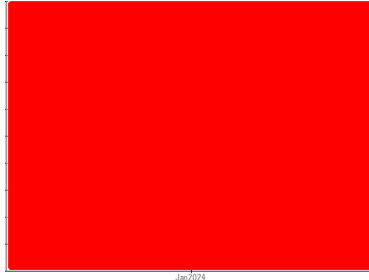

COMPONENT CONDITION SUMMARY

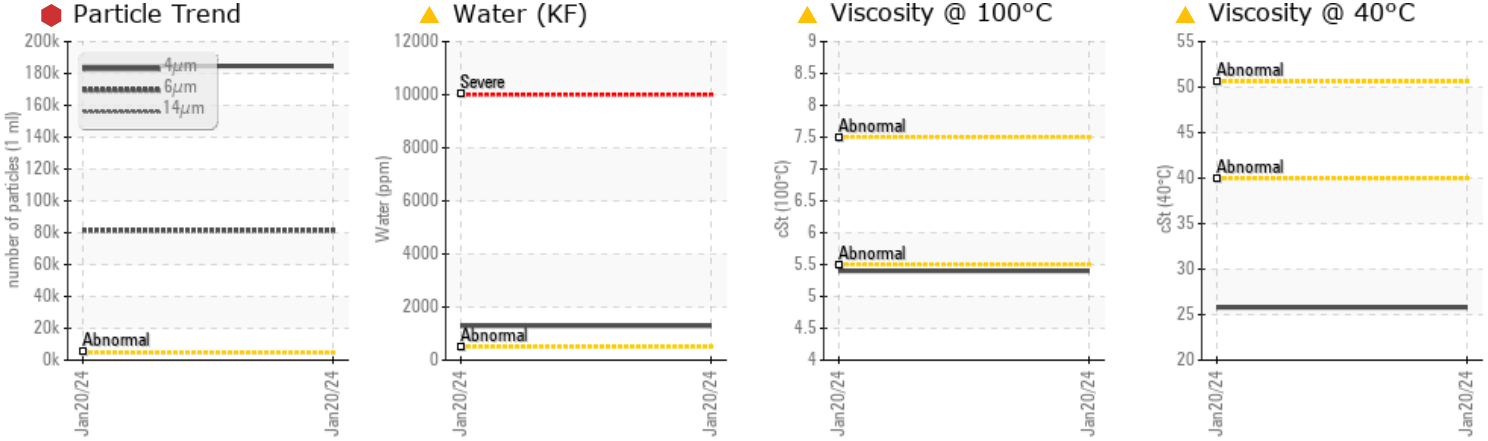

RECOMMENDATION

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Check seals and/or filters for points of contaminant entry. We advise that you check all areas where contaminants can enter the system. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We advise that you use off-line filtration with water adsorbent filters to attempt to remove the water from this oil. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. Resample in 30-45 days to monitor this situation. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Water	%	ASTM D6304*	>0.05	▲ 0.129	---	---
ppm Water	ppm	ASTM D6304*	>500	▲ 1294	---	---
Particles >4µm		ASTM D7647	>5000	● 184686	---	---
Particles >6µm		ASTM D7647	>1300	● 81511	---	---
Particles >14µm		ASTM D7647	>160	● 5074	---	---
Particles >21µm		ASTM D7647	>40	● 820	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	● 25/24/20	---	---
Emulsified Water	scalar	Visual*	>0.05	▲ .5%	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		▲ 25.8	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		▲ 5.4	---	---

Customer Id: TERHAM
 Sample No.: PC0081068
 Lab Number: 02614505
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com


To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	Resample in 30-45 days to monitor this situation.
Alert	---	---	?	Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment.
Information Required	---	---	?	Please specify the brand, type, and viscosity of the oil on your next sample. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.
Check Breathers	---	---	?	The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather.
Check Dirt Access	---	---	?	We advise that you check all areas where contaminants can enter the system.
Check Seals	---	---	?	Check seals and/or filters for points of contaminant entry.
Filter Fluid	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.

HISTORICAL DIAGNOSIS

Area
[450255637]
 Machine Id
PB-04002-HA HOISTING PUMP MID CRANE
 Component
Hydraulic System
 Fluid
{not provided} (--- GAL)

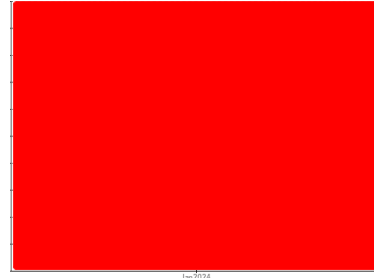

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Check seals and/or filters for points of contaminant entry. We advise that you check all areas where contaminants can enter the system. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We advise that you use off-line filtration with water adsorbent filters to attempt to remove the water from this oil. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. Resample in 30-45 days to monitor this situation. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates (2 to 100 microns in size) present in the oil. There is a moderate concentration of water present in the oil.

Fluid Condition

Viscosity of sample indicates oil is within ATF range, advise investigate. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PC0081068	---	---
Sample Date	Client Info	20 Jan 2024	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		SEVERE	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185(m)	>20	5	---	---
Chromium ppm ASTM D5185(m)	>10	0	---	---
Nickel ppm ASTM D5185(m)	>10	<1	---	---
Titanium ppm ASTM D5185(m)		0	---	---
Silver ppm ASTM D5185(m)		0	---	---
Aluminum ppm ASTM D5185(m)	>10	<1	---	---
Lead ppm ASTM D5185(m)	>20	<1	---	---
Copper ppm ASTM D5185(m)	>20	1	---	---
Tin ppm ASTM D5185(m)	>10	0	---	---
Antimony ppm ASTM D5185(m)		0	---	---
Vanadium ppm ASTM D5185(m)		0	---	---
Beryllium ppm ASTM D5185(m)		0	---	---
Cadmium ppm ASTM D5185(m)		0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185(m)		82	---	---
Barium ppm ASTM D5185(m)		2	---	---
Molybdenum ppm ASTM D5185(m)		0	---	---
Manganese ppm ASTM D5185(m)		0	---	---
Magnesium ppm ASTM D5185(m)		2	---	---
Calcium ppm ASTM D5185(m)		67	---	---
Phosphorus ppm ASTM D5185(m)		240	---	---
Zinc ppm ASTM D5185(m)		108	---	---
Sulfur ppm ASTM D5185(m)		771	---	---
Lithium ppm ASTM D5185(m)		<1	---	---






CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185(m)	>15	2	---	---
Sodium ppm ASTM D5185(m)		8	---	---
Potassium ppm ASTM D5185(m)	>20	1	---	---
Water % ASTM D6304*	>0.05	▲ 0.129	---	---
ppm Water ppm ASTM D6304*	>500	▲ 1294	---	---

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	184686	---	---
Particles >6µm ASTM D7647	>1300	81511	---	---
Particles >14µm ASTM D7647	>160	5074	---	---
Particles >21µm ASTM D7647	>40	820	---	---
Particles >38µm ASTM D7647	>10	13	---	---
Particles >71µm ASTM D7647	>3	1	---	---
Oil Cleanliness ISO 4406 (c)	>19/17/14	25/24/20	---	---

OIL ANALYSIS REPORT

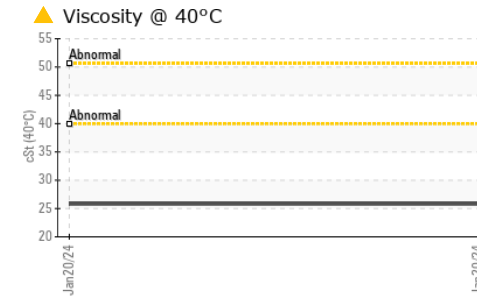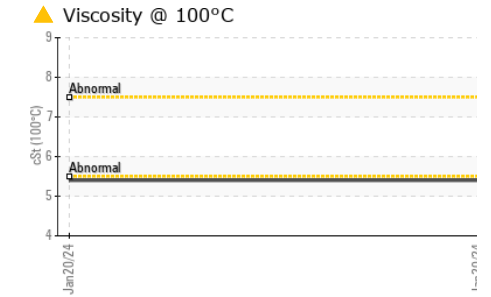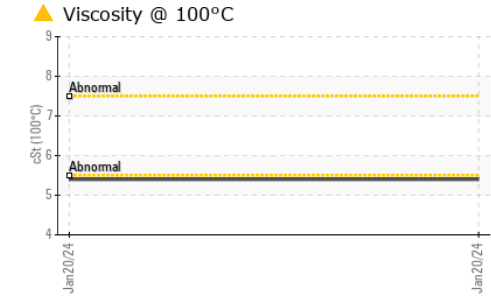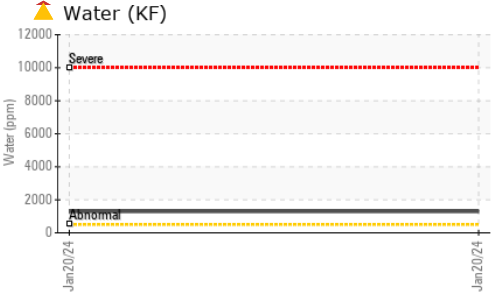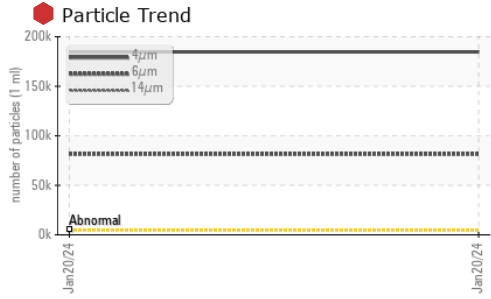






FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.77	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.05	▲ .5%	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		▲ 25.8	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		▲ 5.4	---	---
Viscosity Index (VI)	Scale	ASTM D2270*		150	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image

GRAPHS

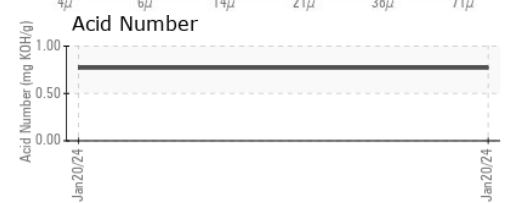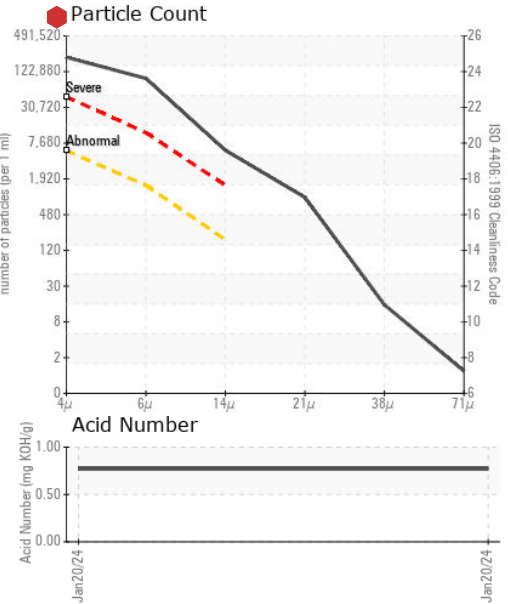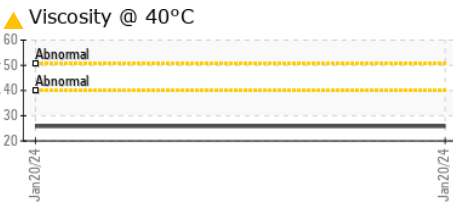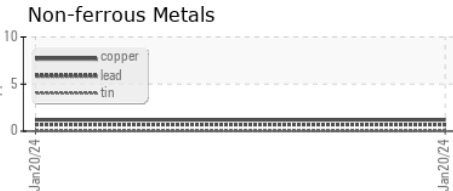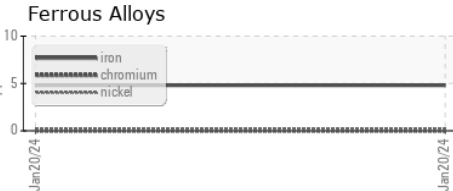

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0081068 **Received** : 09 Feb 2024
Lab Number : **02614505** **Tested** : 13 Feb 2024
Unique Number : 5723600 **Diagnosed** : 13 Feb 2024 - Kevin Marson
Test Package : IND 2 (Additional Tests: KF, KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Suncor - Terra Nova Projects
 Scotia Centre, 235 Water Street
 St. John's, NL
 CA A1C 1B6
 Contact: Josh Hynes
 joshhynes@suncor.com
 T: (709)778-3575
 F: (709)724-2835