




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

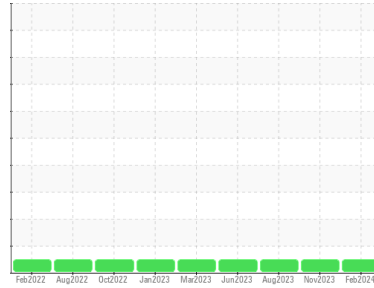

Machine Id  
**810051**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0093953</b>	GFL0093926	GFL0062941
Sample Date	Client Info		<b>11 Feb 2024</b>	08 Nov 2023	22 Aug 2023
Machine Age	hrs	Client Info	<b>5120</b>	4571	4065
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	<b>33</b>	30	19
Chromium	ppm	ASTM D5185(m) >20	<b>2</b>	2	1
Nickel	ppm	ASTM D5185(m) >4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m) >3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185(m) >20	<b>5</b>	5	4
Lead	ppm	ASTM D5185(m) >40	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185(m) >330	<b>2</b>	2	2
Tin	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	<1	0
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 250	<b>6</b>	5	6
Barium	ppm	ASTM D5185(m) 10	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m) 100	<b>60</b>	62	57
Manganese	ppm	ASTM D5185(m)	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m) 450	<b>953</b>	979	935
Calcium	ppm	ASTM D5185(m) 3000	<b>1148</b>	1120	1055
Phosphorus	ppm	ASTM D5185(m) 1150	<b>1014</b>	983	1022
Zinc	ppm	ASTM D5185(m) 1350	<b>1193</b>	1234	1175
Sulfur	ppm	ASTM D5185(m) 4250	<b>2552</b>	2429	2447
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>4</b>	6	5
Sodium	ppm	ASTM D5185(m) >216	<b>8</b>	9	7
Potassium	ppm	ASTM D5185(m) >20	<b>6</b>	9	6

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	<b>0.5</b>	0.6	0.3
Nitration	Abs/cm	ASTM D7624* >20	<b>10.0</b>	10.5	9.0
Sulfation	Abs/.1mm	ASTM D7415* >30	<b>22.2</b>	22.0	21.4



# OIL ANALYSIS REPORT

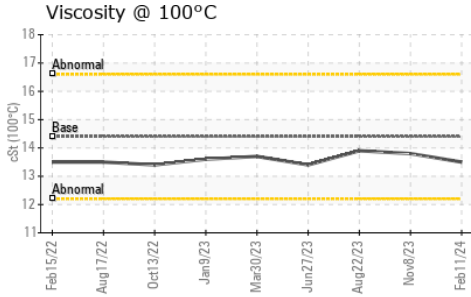

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs./1mm ASTM D7414*	>25	19.1	18.5	16.7









## VISUAL

method	limit/base	current	history1	history2	
Emulsified Water	scalar Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar Visual*	NEG	NEG	NEG	

## FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 100°C	cSt ASTM D7279(m)	14.4	13.5	13.8	13.9

## GRAPHS

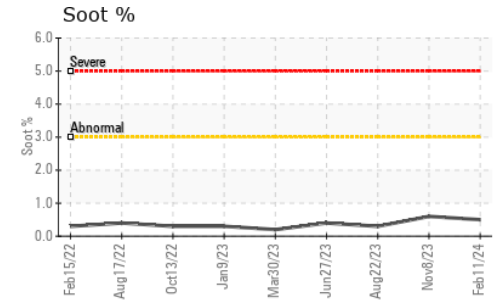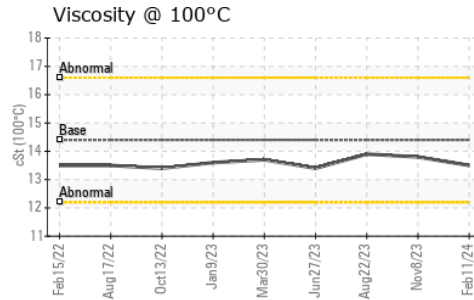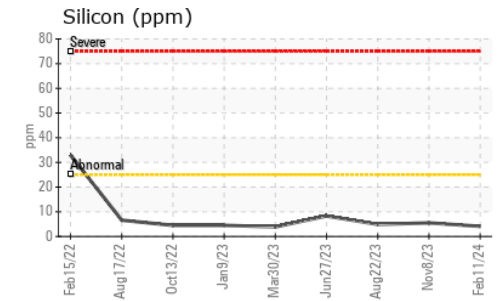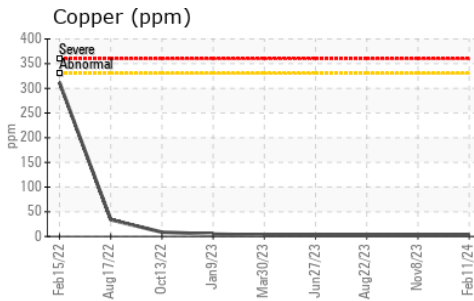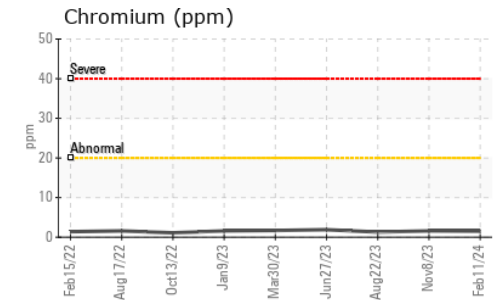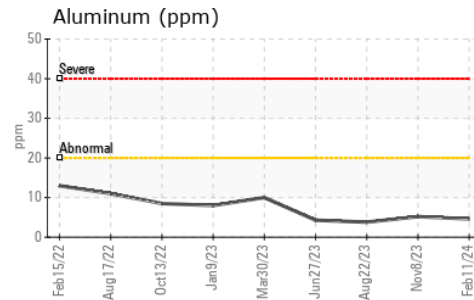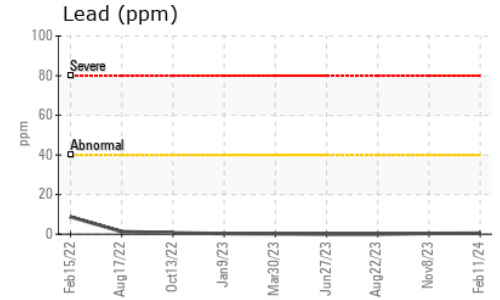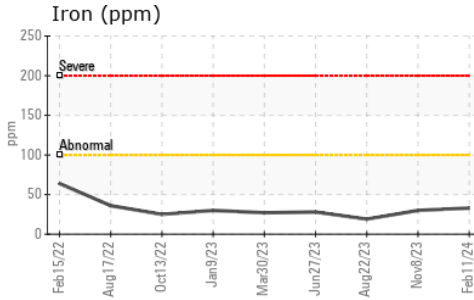

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0093953  
**Lab Number** : 02614908  
**Unique Number** : 5724003  
**Test Package** : MOB 1  
**Received** : 12 Feb 2024  
**Tested** : 12 Feb 2024  
**Diagnosed** : 12 Feb 2024 - Wes Davis

**GFL Environmental - 777 - Belleville-Municipal waste**  
 197 Putman Industrial Road  
 Belleville, ON  
 CA K8N 4Z6  
 Contact: Andrea Michael  
 amichael@gflenv.com  
 T: (613)962-7144  
 F: (613)962-1994

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.