




OIL ANALYSIS REPORT

Sample Rating Trend

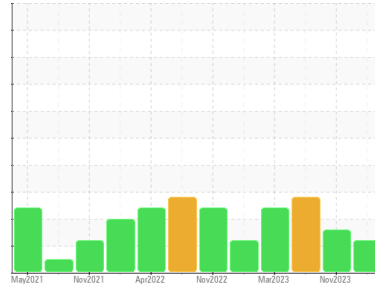

FUEL



Machine Id
250003

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0096729	GFL0096749	GFL0084103	
Sample Date	Client Info	24 Jan 2024	09 Nov 2023	21 Jun 2023	
Machine Age	hrs	Client Info	12117	101689	9675
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A	
Sample Status		ABNORMAL	SEVERE	SEVERE	

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185(m)	>100	15	31	19
Chromium	ppm	ASTM D5185(m)	>20	<1	2	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	1	2	1
Aluminum	ppm	ASTM D5185(m)	>20	2	2	1
Lead	ppm	ASTM D5185(m)	>40	0	0	0
Copper	ppm	ASTM D5185(m)	>330	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185(m)	0	2	1	4
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	60	57	55	53
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	1010	923	901	832
Calcium	ppm	ASTM D5185(m)	1070	1027	976	925
Phosphorus	ppm	ASTM D5185(m)	1150	956	916	920
Zinc	ppm	ASTM D5185(m)	1270	1126	1115	1026
Sulfur	ppm	ASTM D5185(m)	2060	2467	2139	2099
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS



method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185(m)	>25	9	11	7
Sodium	ppm	ASTM D5185(m)		5	7	3
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Fuel	%	ASTM D7593*	>5	6.4	5.6	11.2

INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	ASTM D7844*	>3	0	0.2	0.2
Nitration	Abs/cm	ASTM D7624*	>20	10.2	13.4	11.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.6	29.3	25.0



OIL ANALYSIS REPORT







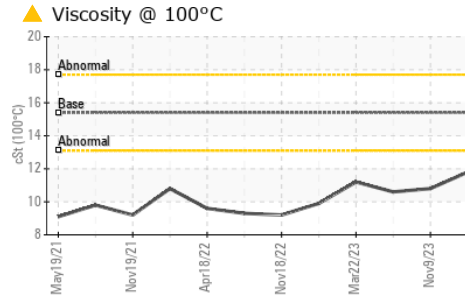
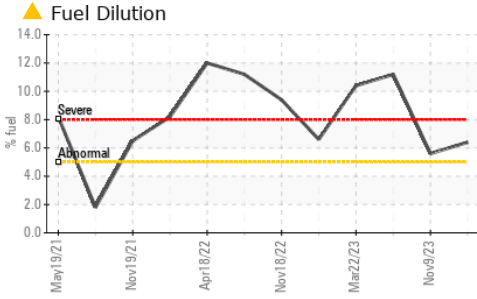


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	21.9	36.7	28.2

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 11.8	● 10.8	● 10.6

GRAPHS

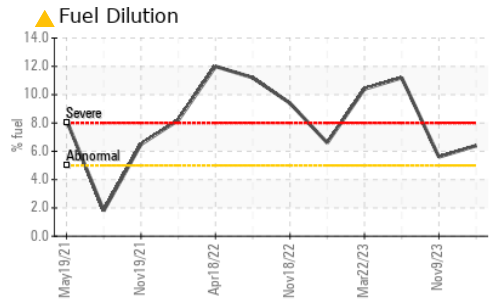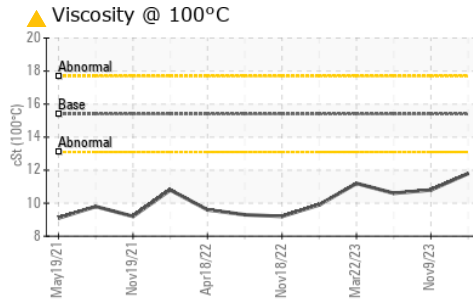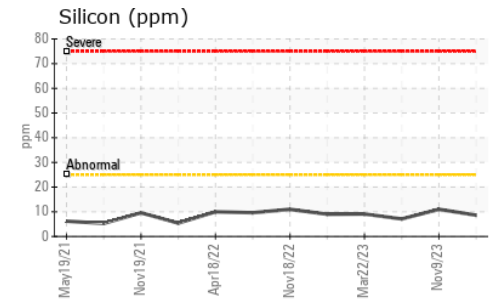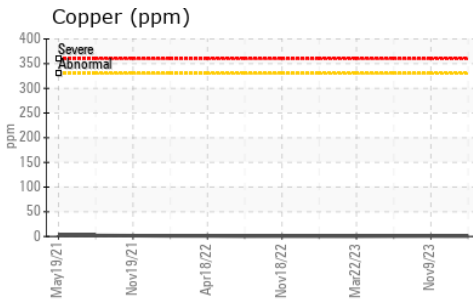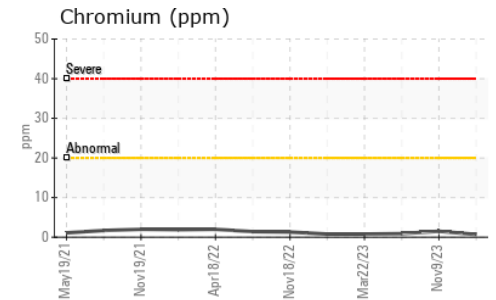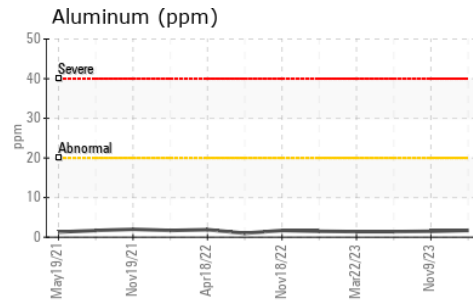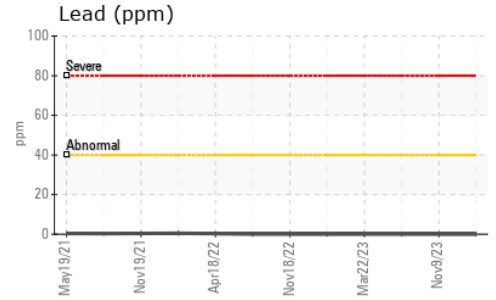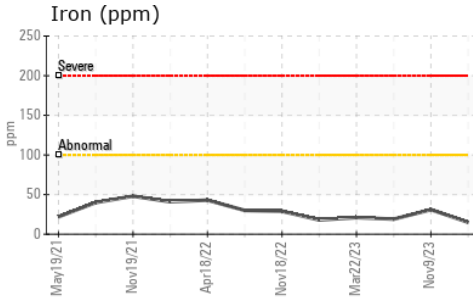

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0096729 **Received** : 13 Feb 2024
Lab Number : 02615282 **Tested** : 14 Feb 2024
Unique Number : 5724377 **Diagnosed** : 14 Feb 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel)

GFL Environmental - 574 - Vancouver Fleet
 70 Golden Drive,
 Coquitlam, BC
 CA V3K 6B5
 Contact: Allison Adams
 aadams@gflenv.com
 T: (604)529-4023
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.