




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

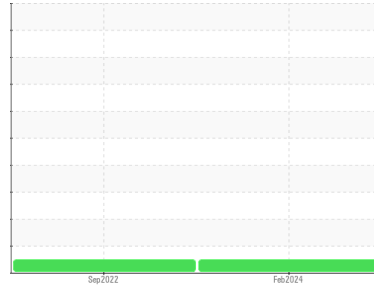

Machine Id  
**831053**  
 Component  
**Transmission (Auto)**  
 Fluid  
**DEXRON III (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0099566</b>	GFL0060197	---
Sample Date	Client Info	<b>01 Feb 2024</b>	26 Sep 2022	---
Machine Age	hrs	Client Info	<b>3512</b>	1040
Oil Age	hrs	Client Info	<b>0</b>	1040
Oil Changed	Client Info	<b>N/A</b>	Changed	---
Sample Status		<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG

## WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	>75	<b>2</b>	---
Iron	ppm	ASTM D5185(m)	>220	<b>77</b>
Chromium	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>
Titanium	ppm	ASTM D5185(m)		<b>0</b>
Silver	ppm	ASTM D5185(m)	>5	<b>0</b>
Aluminum	ppm	ASTM D5185(m)	>75	<b>18</b>
Lead	ppm	ASTM D5185(m)	>95	<b>12</b>
Copper	ppm	ASTM D5185(m)	>60	<b>24</b>
Tin	ppm	ASTM D5185(m)	>10	<b>2</b>
Antimony	ppm	ASTM D5185(m)	>2	<b>0</b>
Vanadium	ppm	ASTM D5185(m)		<b>0</b>
Beryllium	ppm	ASTM D5185(m)		<b>0</b>
Cadmium	ppm	ASTM D5185(m)		<b>0</b>

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>91</b>
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>
Manganese	ppm	ASTM D5185(m)		<b>2</b>
Magnesium	ppm	ASTM D5185(m)		<b>2</b>
Calcium	ppm	ASTM D5185(m)		<b>134</b>
Phosphorus	ppm	ASTM D5185(m)		<b>281</b>
Zinc	ppm	ASTM D5185(m)		<b>31</b>
Sulfur	ppm	ASTM D5185(m)		<b>1761</b>
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>

## CONTAMINANTS




method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>5</b>
Sodium	ppm	ASTM D5185(m)		<b>7</b>
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		<b>1.36</b>




# OIL ANALYSIS REPORT

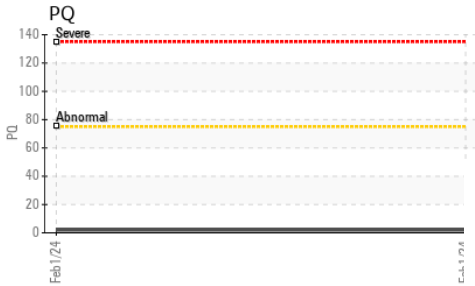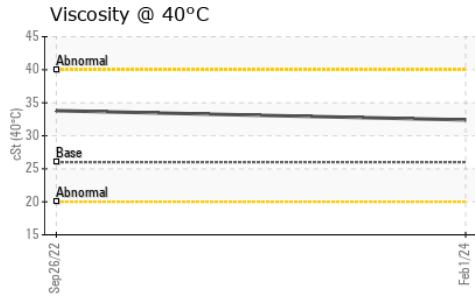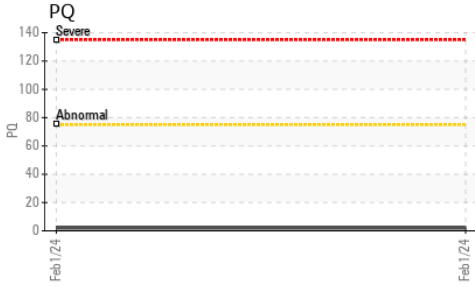









VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	
Yellow Metal	scalar	Visual*	NONE	NONE	---	
Precipitate	scalar	Visual*	NONE	VLITE	---	
Silt	scalar	Visual*	NONE	NONE	---	
Debris	scalar	Visual*	NONE	NONE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	
Appearance	scalar	Visual*	NORML	NORML	---	
Odor	scalar	Visual*	NORML	NORML	---	
Emulsified Water	scalar	Visual*	>0.1	NEG	---	
Free Water	scalar	Visual*		NEG	---	

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	<b>32.4</b>	33.8	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

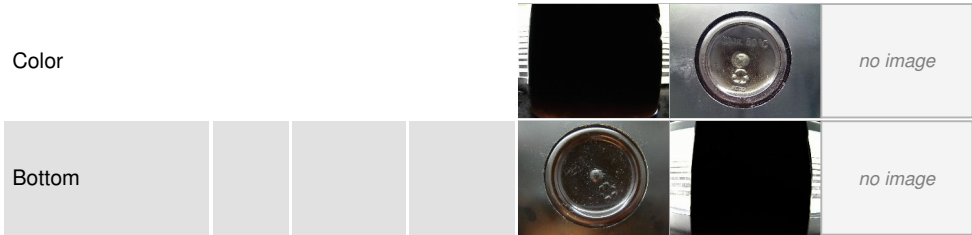

## GRAPHS

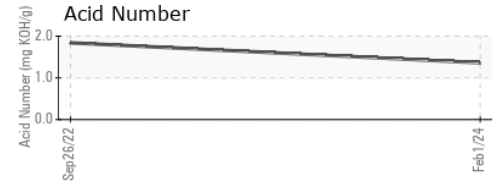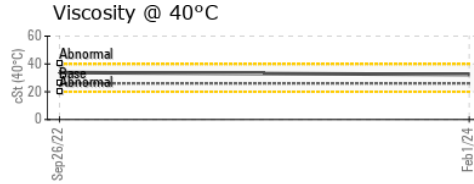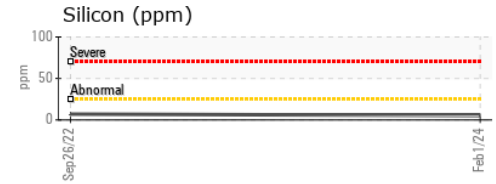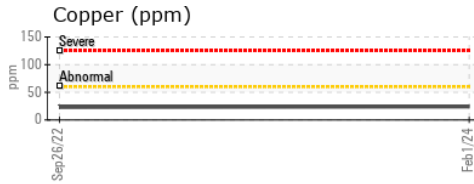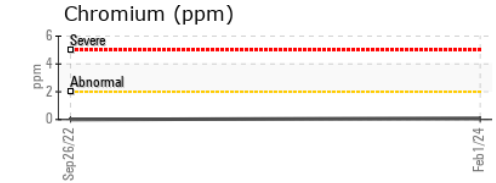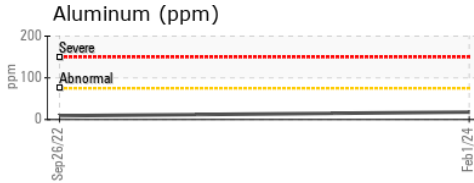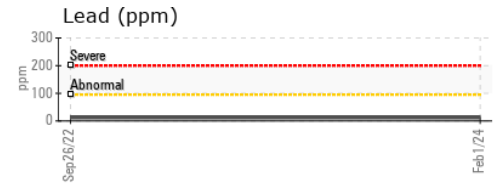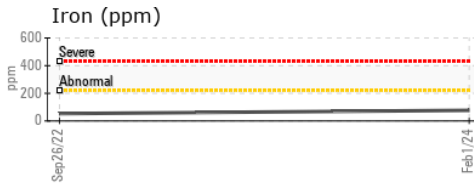

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0099566 **Received** : 13 Feb 2024  
**Lab Number** : 02615414 **Tested** : 14 Feb 2024  
**Unique Number** : 5724509 **Diagnosed** : 14 Feb 2024 - Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: PQ, TAN Man )

**GFL Environmental - 550 - Rocky View County**  
 220 Carmek Blvd  
 Rocky View County, AB  
 CA T1X 1X1  
 Contact: GFL Calgary  
 calgarymaintenance@gflenv.com  
 T:  
 F: (403)369-6163

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.