




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
EX0358
 Component
Center Swing Drive
 Fluid
PETRO CANADA TRAXON E SYNTHETIC 80W-140 (5 LTR)

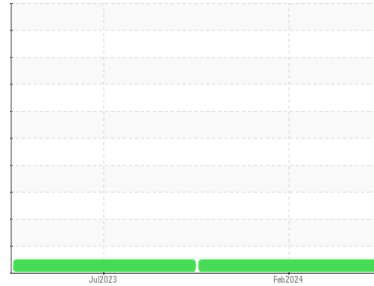

DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0092325	GFL0087389	---
Sample Date	Client Info		09 Feb 2024	28 Jul 2023	---
Machine Age	hrs	Client Info	22386	22000	---
Oil Age	hrs	Client Info	22386	1000	---
Oil Changed	Client Info		Not Chngd	Not Chngd	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >400	20	33	---
Chromium	ppm	ASTM D5185(m) >10	1	<1	---
Nickel	ppm	ASTM D5185(m) >10	0	<1	---
Titanium	ppm	ASTM D5185(m)	0	<1	---
Silver	ppm	ASTM D5185(m)	0	0	---
Aluminum	ppm	ASTM D5185(m) >25	1	<1	---
Lead	ppm	ASTM D5185(m) >50	<1	0	---
Copper	ppm	ASTM D5185(m) >200	3	3	---
Tin	ppm	ASTM D5185(m) >10	0	0	---
Antimony	ppm	ASTM D5185(m) >5	0	19	---
Vanadium	ppm	ASTM D5185(m)	0	0	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---

ADDITIVES



	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 202	81	280	---
Barium	ppm	ASTM D5185(m) <1	0	<1	---
Molybdenum	ppm	ASTM D5185(m)	0	<1	---
Manganese	ppm	ASTM D5185(m)	0	<1	---
Magnesium	ppm	ASTM D5185(m) <1	14	3	---
Calcium	ppm	ASTM D5185(m)	2807	265	---
Phosphorus	ppm	ASTM D5185(m) 1209	659	1158	---
Zinc	ppm	ASTM D5185(m) 1	129	11	---
Sulfur	ppm	ASTM D5185(m) 20439	3289	19077	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	3	11	---
Sodium	ppm	ASTM D5185(m)	2	<1	---
Potassium	ppm	ASTM D5185(m) >20	2	1	---



OIL ANALYSIS REPORT

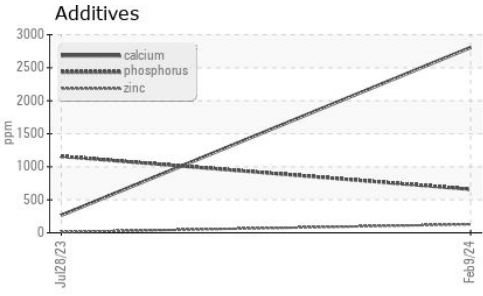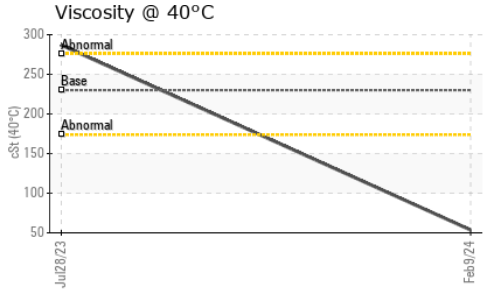









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	230	53.6	287	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color					no image
Bottom					no image

GRAPHS

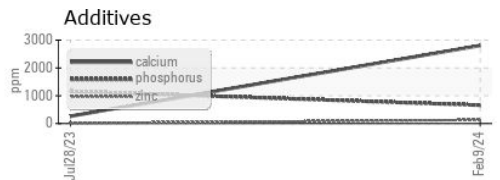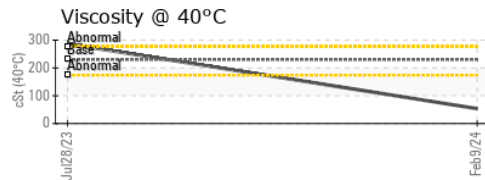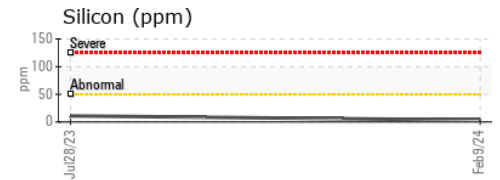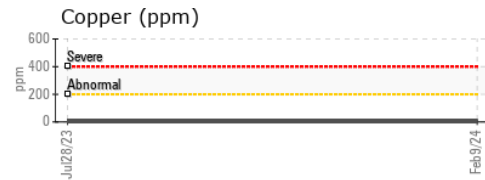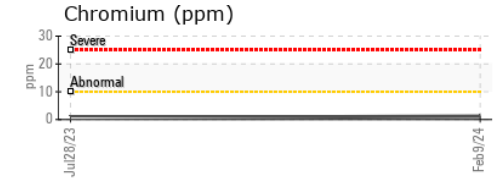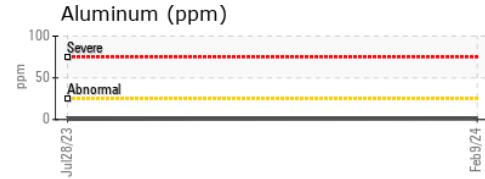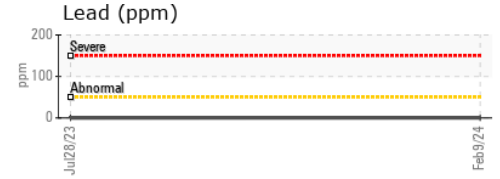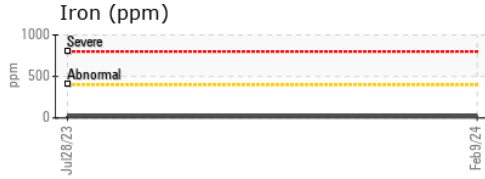

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0092325 **Received** : 13 Feb 2024
Lab Number : 02615439 **Tested** : 14 Feb 2024
Unique Number : 5724534 **Diagnosed** : 14 Feb 2024 - Wes Davis
Test Package : MOB 1

GFL Environmental - 720 - Lafleche - Landfill
 17125 Lafleche Road,
 Moose Creek, ON
 CA K0C 1W0
 Contact: Charles Bergeron
 cbergeron@gflenv.com
 T: (613)538-4853
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.