

Machine Id  
**OR900**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON UHP 5W40 (12 LTR)**

**DIAGNOSIS**

**Recommendation**

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

**Wear**

Metal levels are typical for a new component breaking in.

**Contamination**

Test for glycol is negative. There is no indication of any contamination in the oil.

**Fluid Condition**

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>PC0082048</b>   | PC0064768   | PC0034647   |
| Sample Date        | Client Info |             |            | <b>31 Jan 2024</b> | 20 Jul 2022 | 25 Feb 2021 |
| Machine Age        | hrs         | Client Info |            | <b>909</b>         | 1           | 7684        |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Changed        | Client Info |             |            | <b>Changed</b>     | Changed     | Changed     |
| Sample Status      |             |             |            | <b>NORMAL</b>      | ATTENTION   | ABNORMAL    |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method | >5     |            | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water         | WC Method | >0.2   |            | <b>NEG</b>     | NEG      | NEG      |





| WEAR METALS |     | method        | limit/base | current      | history1 | history2 |
|-------------|-----|---------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185(m) | >100       | <b>10</b>    | 28       | 42       |
| Chromium    | ppm | ASTM D5185(m) | >20        | <b>13</b>    | 6        | 9        |
| Nickel      | ppm | ASTM D5185(m) | >4         | <b>&lt;1</b> | 0        | <1       |
| Titanium    | ppm | ASTM D5185(m) |            | <b>0</b>     | 4        | <1       |
| Silver      | ppm | ASTM D5185(m) | >3         | <b>0</b>     | 0        | 0        |
| Aluminum    | ppm | ASTM D5185(m) | >20        | <b>3</b>     | 4        | 6        |
| Lead        | ppm | ASTM D5185(m) | >40        | <b>&lt;1</b> | 3        | 12       |
| Copper      | ppm | ASTM D5185(m) | >330       | <b>4</b>     | 10       | 61       |
| Tin         | ppm | ASTM D5185(m) | >15        | <b>0</b>     | <1       | <1       |
| Antimony    | ppm | ASTM D5185(m) |            | <b>0</b>     | <1       | <1       |
| Vanadium    | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Beryllium   | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Cadmium     | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |

| ADDITIVES  |     | method        | limit/base | current      | history1 | history2 |
|------------|-----|---------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185(m) | 65         | <b>156</b>   | 13       | 8        |
| Barium     | ppm | ASTM D5185(m) | 0          | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm | ASTM D5185(m) | 65         | <b>5</b>     | 111      | 242      |
| Manganese  | ppm | ASTM D5185(m) | 0          | <b>0</b>     | <1       | <1       |
| Magnesium  | ppm | ASTM D5185(m) | 1160       | <b>103</b>   | 959      | 1104     |
| Calcium    | ppm | ASTM D5185(m) | 820        | <b>2123</b>  | 1176     | 873      |
| Phosphorus | ppm | ASTM D5185(m) | 1160       | <b>984</b>   | 946      | 869      |
| Zinc       | ppm | ASTM D5185(m) | 1260       | <b>1165</b>  | 1225     | 1274     |
| Sulfur     | ppm | ASTM D5185(m) | 3000       | <b>3081</b>  | 2669     | 2771     |
| Lithium    | ppm | ASTM D5185(m) |            | <b>&lt;1</b> | <1       | <1       |

| CONTAMINANTS |     | method        | limit/base | current    | history1 | history2 |
|--------------|-----|---------------|------------|------------|----------|----------|
| Silicon      | ppm | ASTM D5185(m) | >25        | <b>22</b>  | 6        | 9        |
| Sodium       | ppm | ASTM D5185(m) |            | <b>31</b>  | ▲ 379    | ▲ 922    |
| Potassium    | ppm | ASTM D5185(m) | >20        | <b>6</b>   | 1        | ▲ 8      |
| Glycol       | %   | ASTM D7922*   |            | <b>0.0</b> | ▲ 0.014  | ▲ 0.043  |

| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | ASTM D7844* | >3         | <b>0</b>    | 0        | 0.1      |
| Nitration | Abs/cm   | ASTM D7624* | >20        | <b>9.5</b>  | 13.0     | 14.0     |
| Sulfation | Abs/.1mm | ASTM D7415* | >30        | <b>22.1</b> | 23.2     | 23.2     |

# OIL ANALYSIS REPORT





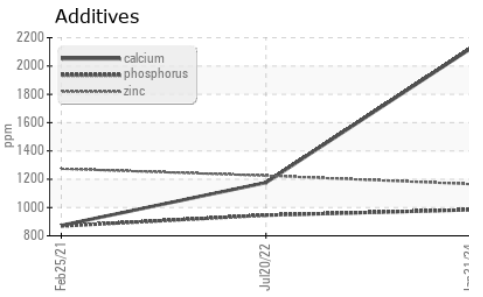
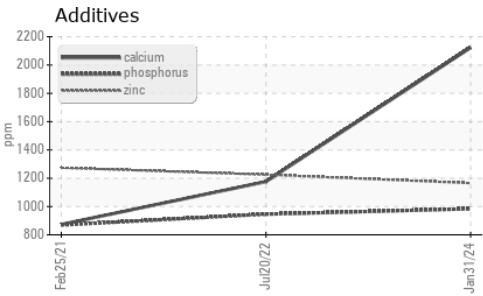
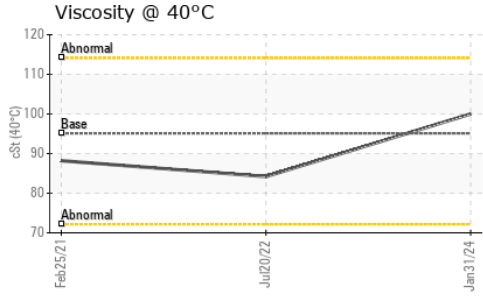
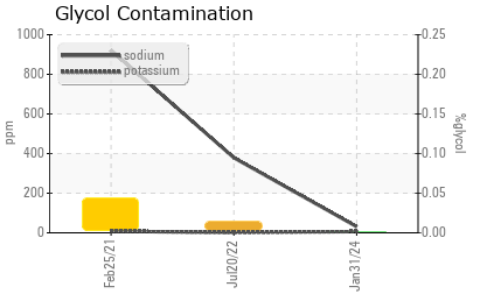


| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs./1mm | ASTM D7414* | >25        | <b>20.1</b> | 21.9     | 22.6     |

| VISUAL           |        | method  | limit/base | current      | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal      | scalar | Visual* | NONE       | <b>NONE</b>  | ---      | ---      |
| Yellow Metal     | scalar | Visual* | NONE       | <b>NONE</b>  | ---      | ---      |
| Precipitate      | scalar | Visual* | NONE       | <b>NONE</b>  | ---      | ---      |
| Silt             | scalar | Visual* | NONE       | <b>NONE</b>  | ---      | ---      |
| Debris           | scalar | Visual* | NONE       | <b>VLITE</b> | ---      | ---      |
| Sand/Dirt        | scalar | Visual* | NONE       | <b>NONE</b>  | ---      | ---      |
| Appearance       | scalar | Visual* | NORML      | <b>NORML</b> | ---      | ---      |
| Odor             | scalar | Visual* | NORML      | <b>NORML</b> | NORML    | ---      |
| Emulsified Water | scalar | Visual* | >0.2       | <b>NEG</b>   | NEG      | NEG      |
| Free Water       | scalar | Visual* |            | <b>NEG</b>   | NEG      | NEG      |

| FLUID PROPERTIES     |       | method        | limit/base | current     | history1 | history2 |
|----------------------|-------|---------------|------------|-------------|----------|----------|
| Visc @ 40°C          | cSt   | ASTM D7279(m) | 95.1       | <b>100</b>  | 84.2     | 88.2     |
| Visc @ 100°C         | cSt   | ASTM D7279(m) | 14.3       | <b>13.7</b> | 13.5     | 13.9     |
| Viscosity Index (VI) | Scale | ASTM D2270*   | 169        | <b>137</b>  | 163      | 161      |

## GRAPHS

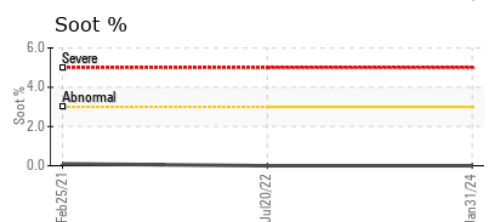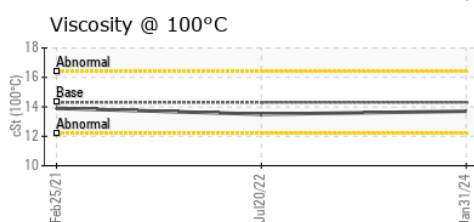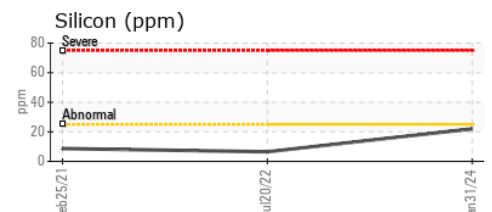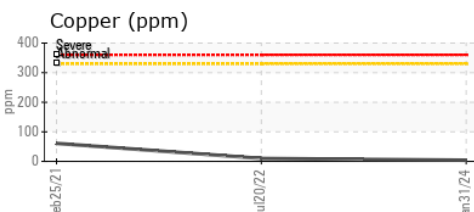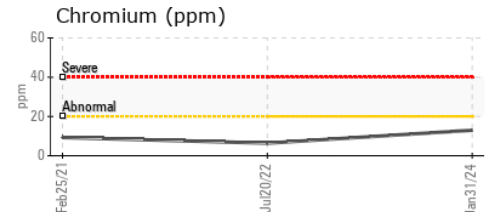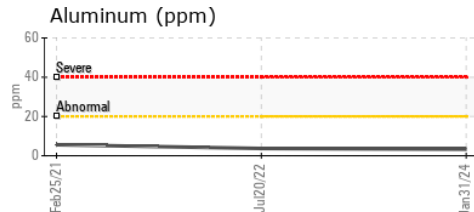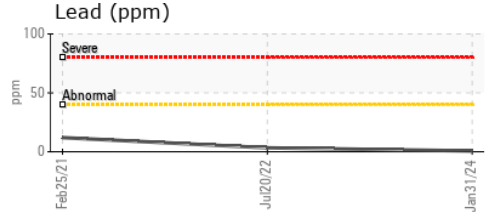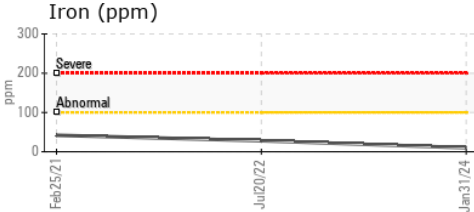

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0082048  
**Lab Number** : 02615554  
**Unique Number** : 5724649  
**Test Package** : MOB 1 ( Additional Tests: Glycol, KV40, VI, Visual )

Green Infrastructure and Partners Inc (GIPI) - 286 - Shoring & Foundations  
 151 Ram Forest Rd,  
 Stouffville, ON  
 CA L4A 2G8  
 Contact: Bill Acton  
 bacton@gipi.com

**Received** : 14 Feb 2024  
**Tested** : 14 Feb 2024  
**Diagnosed** : 15 Feb 2024 - Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.