


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

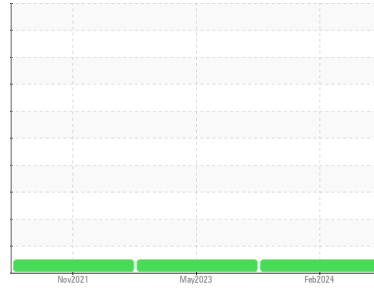

Machine Id
CR254

Component
Right Final Drive

Fluid
PETRO CANADA ENDURATEX EP 220 (8 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0080572	PC0056407	PC0056351
Sample Date	Client Info			11 Feb 2024	26 May 2023	01 Nov 2021
Machine Age	hrs	Client Info		6800	5840	4174
Oil Age	hrs	Client Info		0	1000	0
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG





WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		13	---	---
Iron	ppm	ASTM D5185(m)	>500	56	122	356
Chromium	ppm	ASTM D5185(m)	>10	<1	2	6
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	1
Titanium	ppm	ASTM D5185(m)		0	<1	2
Silver	ppm	ASTM D5185(m)		0	0	<1
Aluminum	ppm	ASTM D5185(m)	>25	6	11	40
Lead	ppm	ASTM D5185(m)	>25	<1	<1	2
Copper	ppm	ASTM D5185(m)	>50	2	4	40
Tin	ppm	ASTM D5185(m)	>10	0	<1	1
Antimony	ppm	ASTM D5185(m)	>5	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	<1
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	60	22	20	38
Barium	ppm	ASTM D5185(m)	0	0	0	3
Molybdenum	ppm	ASTM D5185(m)	0	<1	0	<1
Manganese	ppm	ASTM D5185(m)	0	<1	2	7
Magnesium	ppm	ASTM D5185(m)	0	17	7	25
Calcium	ppm	ASTM D5185(m)	0	29	37	99
Phosphorus	ppm	ASTM D5185(m)	270	403	436	273
Zinc	ppm	ASTM D5185(m)	0	17	13	9
Sulfur	ppm	ASTM D5185(m)	11200	5629	6055	11370
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>75	22	44	158
Sodium	ppm	ASTM D5185(m)		2	4	15
Potassium	ppm	ASTM D5185(m)	>20	3	5	17

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.40	0.66	---	---

OIL ANALYSIS REPORT

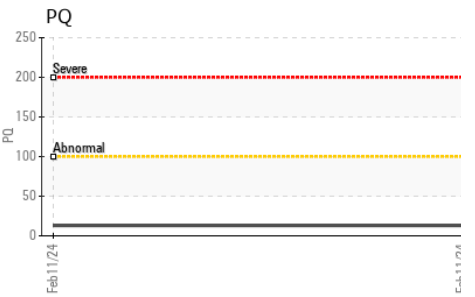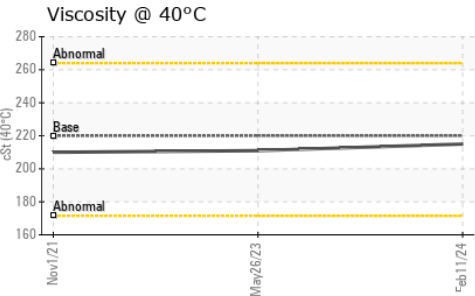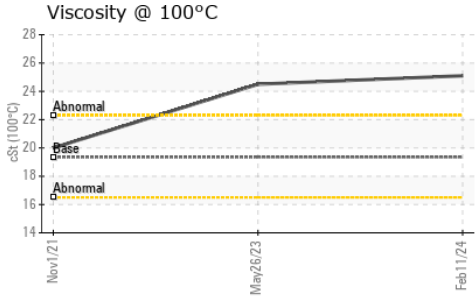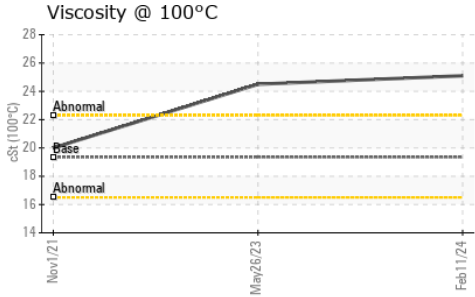






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	VLITE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	220	215	211
Visc @ 100°C	cSt	ASTM D7279(m)	19.35	25.1	24.5
Viscosity Index (VI)	Scale	ASTM D2270*	99	147	145

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------



GRAPHS

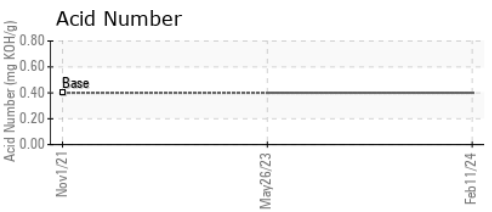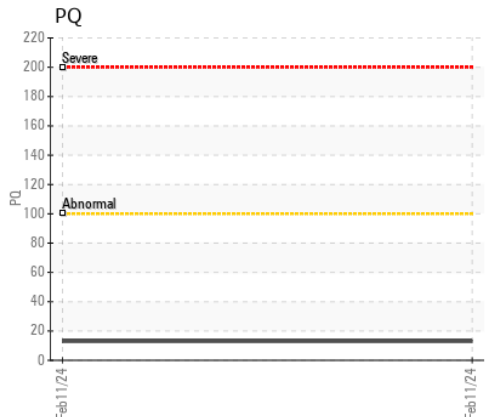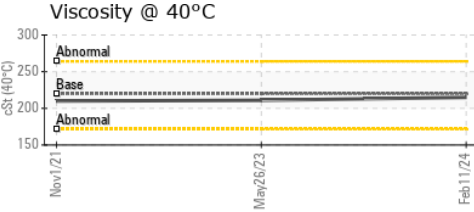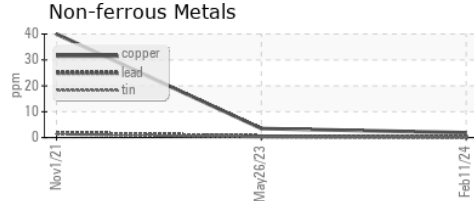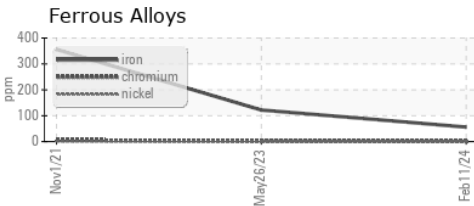

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0080572
Lab Number : 02615764
Unique Number : 5724859
Test Package : IND 2 (Additional Tests: KV100, TAN Man, VI)

Green Infrastructure and Partners Inc (GIPI) - 286 - Shoring & Foundations
 151 Ram Forest Rd,
 Stouffville, ON
 CA L4A 2G8
 Contact: Shannon Abbott
 sabbott@gipi.com
 T: (905)750-5900
 F:

*To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.*