



# OIL ANALYSIS REPORT

Sample Rating Trend


**NORMAL**



Area  
**[1225169]**  
Machine Id  
**810052**

Component  
**Diesel Engine**  
Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

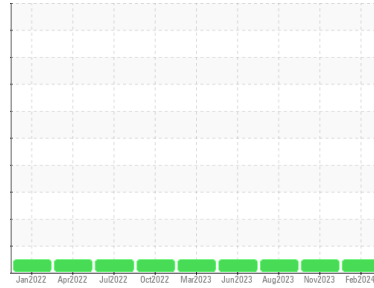

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0093952</b>	GFL0093945	GFL0062942
Sample Date	Client Info			<b>15 Feb 2024</b>	15 Nov 2023	24 Aug 2023
Machine Age	hrs	Client Info		<b>5237</b>	4689	4176
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>26</b>	27	19
Chromium	ppm	ASTM D5185(m)	>20	<b>1</b>	1	1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>6</b>	5	4
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>330	<b>2</b>	2	2
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<b>5</b>	5	6
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>58</b>	61	58
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	1010	<b>925</b>	965	928
Calcium	ppm	ASTM D5185(m)	1070	<b>1105</b>	1098	1078
Phosphorus	ppm	ASTM D5185(m)	1150	<b>994</b>	1001	1031
Zinc	ppm	ASTM D5185(m)	1270	<b>1150</b>	1222	1167
Sulfur	ppm	ASTM D5185(m)	2060	<b>2509</b>	2464	2455
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>5</b>	4	6
Sodium	ppm	ASTM D5185(m)		<b>8</b>	8	7
Potassium	ppm	ASTM D5185(m)	>20	<b>10</b>	9	6

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0.4</b>	0.5	0.3
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.4</b>	9.3	7.7
Sulfation	Abs.1mm	ASTM D7415*	>30	<b>20.7</b>	20.4	20.0



# OIL ANALYSIS REPORT








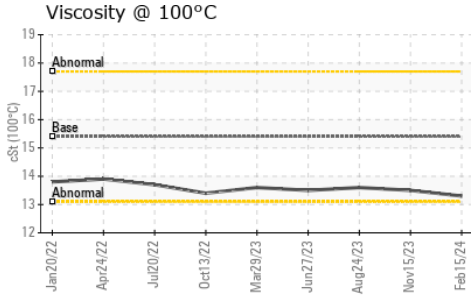


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	17.0	16.6	14.4

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.3	13.5	13.6

## GRAPHS

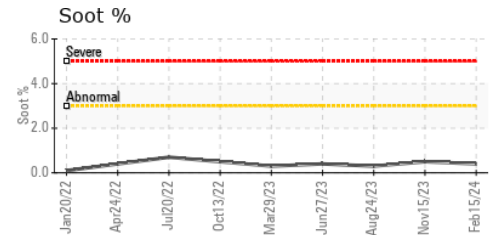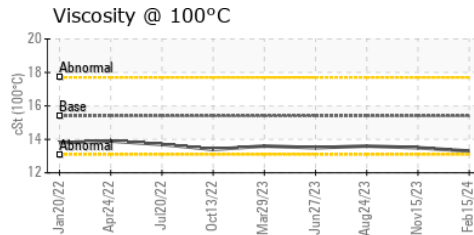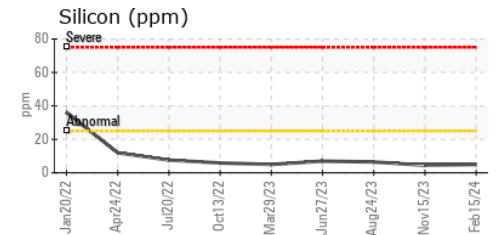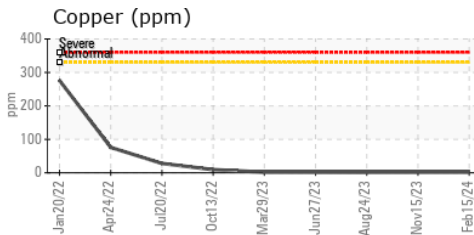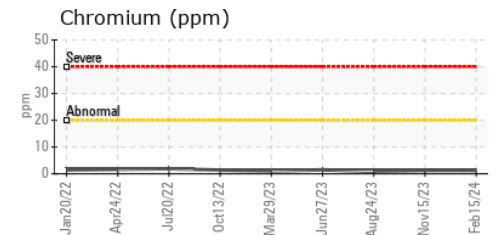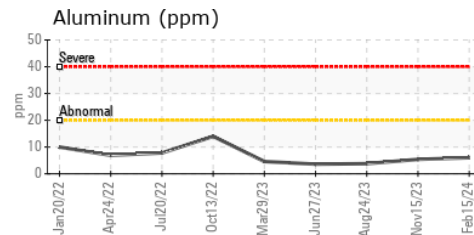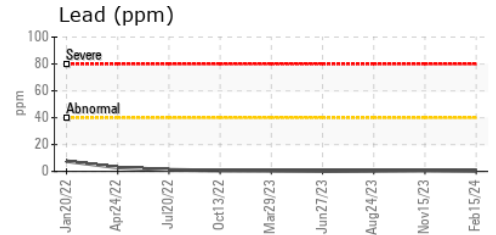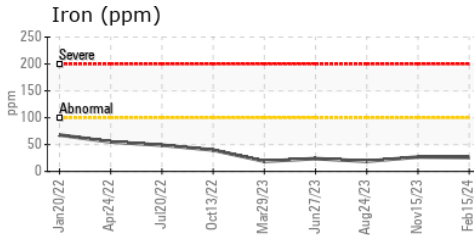

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0093952  
**Lab Number** : 02616140  
**Unique Number** : 5733250  
**Test Package** : MOB 1 ( Additional Tests: Visual )

**Received** : 16 Feb 2024  
**Tested** : 16 Feb 2024  
**Diagnosed** : 16 Feb 2024 - Kevin Marson  
**GFL Environmental - 777 - Belleville-Municipal waste**  
 197 Putman Industrial Road  
 Belleville, ON  
 CA K8N 4Z6  
 Contact: Andrea Michael  
 amichael@gflenv.com  
 T: (613)962-7144  
 F: (613)962-1994

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.