




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

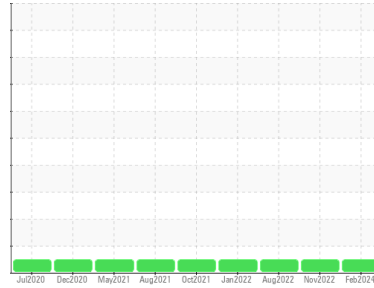

Machine Id
101081

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0108239	GFL0047672	GFL0047670
Sample Date	Client Info		12 Feb 2024	18 Nov 2022	31 Aug 2022
Machine Age	hrs	Client Info	0	12150	11489
Oil Age	hrs	Client Info	500	600	624
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >110	15	16	12
Chromium	ppm	ASTM D5185(m) >4	<1	<1	<1
Nickel	ppm	ASTM D5185(m) >2	0	<1	0
Titanium	ppm	ASTM D5185(m)	0	<1	<1
Silver	ppm	ASTM D5185(m) >2	0	0	0
Aluminum	ppm	ASTM D5185(m) >25	2	4	4
Lead	ppm	ASTM D5185(m) >45	2	2	3
Copper	ppm	ASTM D5185(m) >85	<1	<1	<1
Tin	ppm	ASTM D5185(m) >4	<1	<1	<1
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 2	1	2	<1
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 50	58	60	57
Manganese	ppm	ASTM D5185(m) 0	0	<1	<1
Magnesium	ppm	ASTM D5185(m) 950	985	990	951
Calcium	ppm	ASTM D5185(m) 1050	1093	1094	1048
Phosphorus	ppm	ASTM D5185(m) 995	1004	1075	941
Zinc	ppm	ASTM D5185(m) 1180	1151	1217	1175
Sulfur	ppm	ASTM D5185(m) 2600	2567	2549	2432
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >30	3	4	3
Sodium	ppm	ASTM D5185(m)	<1	1	2
Potassium	ppm	ASTM D5185(m) >20	2	5	9

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	0.1	0	0
Nitration	Abs/cm	ASTM D7624* >20	8.7	8.7	8.2
Sulfation	Abs./1mm	ASTM D7415* >30	20.9	20.6	20.0



OIL ANALYSIS REPORT








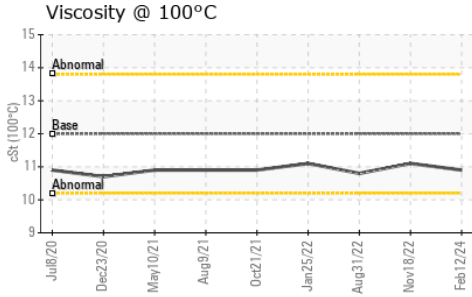


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	17.8	16.2	16.2

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	10.9	11.1	10.8

GRAPHS

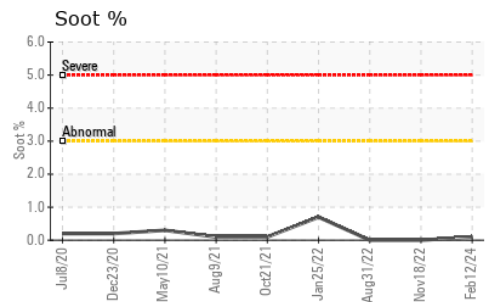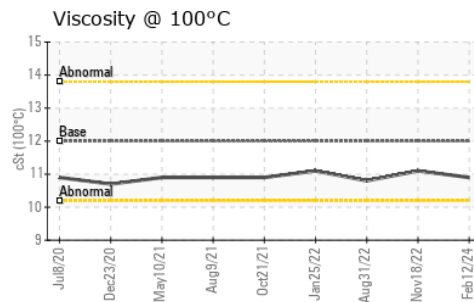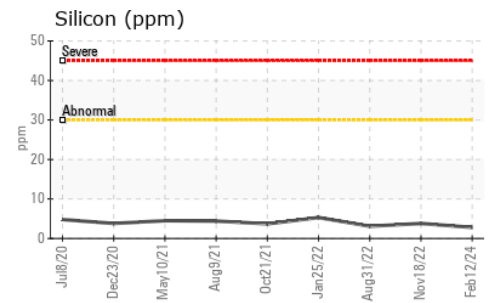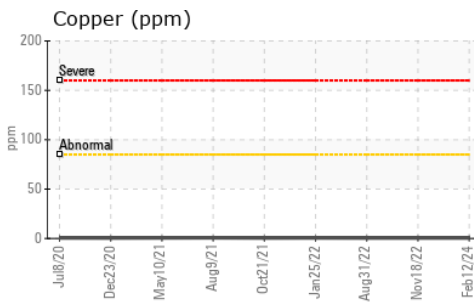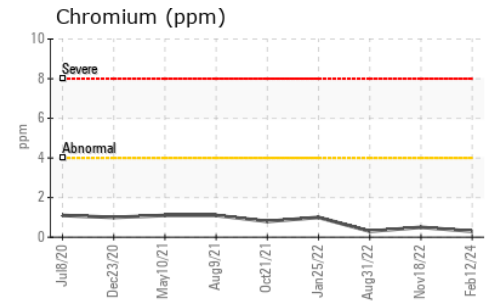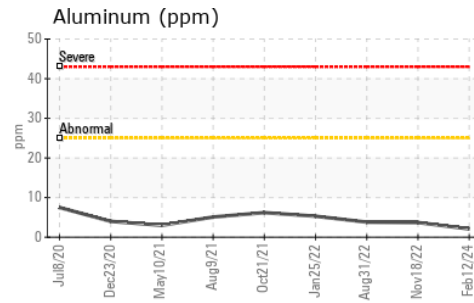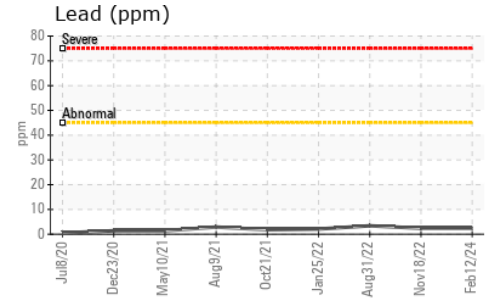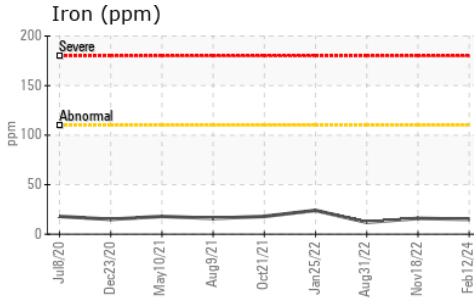

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 355 - Saskatoon**
Sample No. : GFL0108239 **Received** : 16 Feb 2024
Lab Number : **02616182** **Tested** : 16 Feb 2024
Unique Number : 5733292 **Diagnosed** : 16 Feb 2024 - Wes Davis
Test Package : MOB 1

100 Cory Road
 Saskatoon, SK
 CA S7K 3J7
 Contact: Ryan Polichuk
 rpolichuk@gflenv.com
 T: (306)244-9500
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.