

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**NEW HOLLAND T9060 T9060**  
Component  
**Front Differential**  
Fluid  
**PETRO CANADA DURATRAN (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0067003</b>	---	---
Sample Date	Client Info			<b>05 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>3800</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>Not Chngd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---


CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>500	<b>15</b>	---	---
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>2</b>	---	---
Lead	ppm	ASTM D5185(m)	>25	<b>2</b>	---	---
Copper	ppm	ASTM D5185(m)	>100	<b>61</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	110	<b>59</b>	---	---
Barium	ppm	ASTM D5185(m)	0.0	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	0.0	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185(m)	1	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)	13	<b>24</b>	---	---
Calcium	ppm	ASTM D5185(m)	3610	<b>3202</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1192	<b>902</b>	---	---
Zinc	ppm	ASTM D5185(m)	1455	<b>987</b>	---	---
Sulfur	ppm	ASTM D5185(m)	2641	<b>3246</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>75	<b>10</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>3</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	---	---
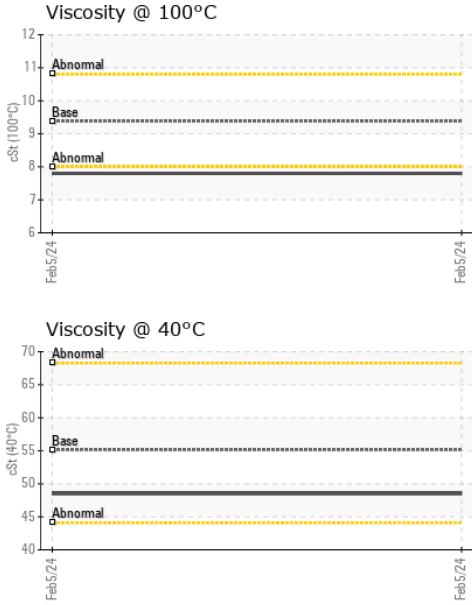
# OIL ANALYSIS REPORT




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	VLITE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	55.14	48.5	---
Visc @ 100°C	cSt	ASTM D7279(m)	9.38	7.8	---
Viscosity Index (VI)	Scale	ASTM D2270*	153	128	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

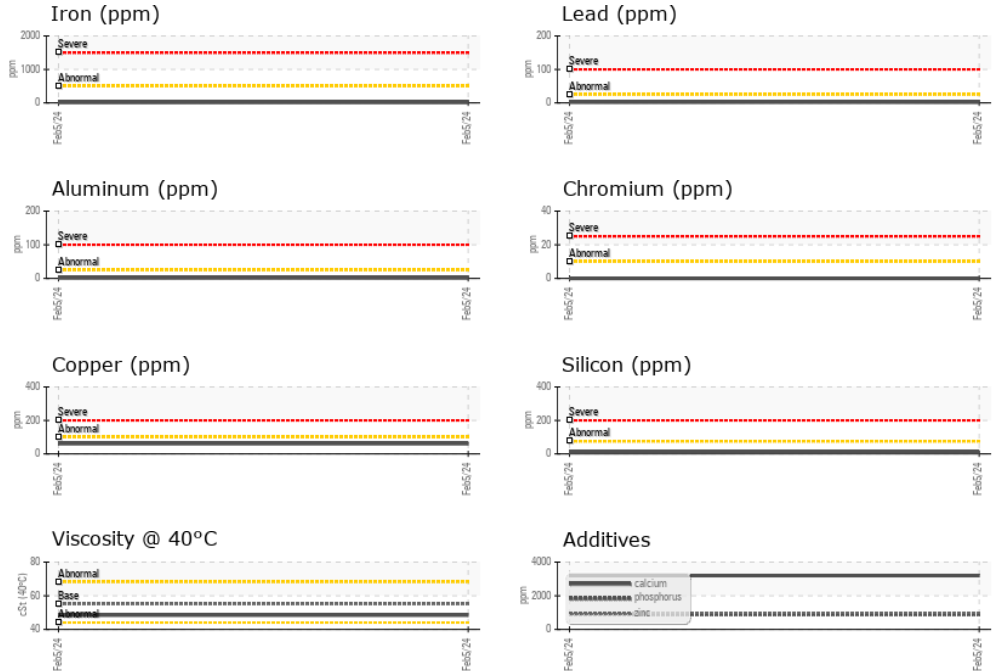

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0067003 **Received** : 16 Feb 2024  
**Lab Number** : 02616333 **Tested** : 16 Feb 2024  
**Unique Number** : 5733443 **Diagnosed** : 16 Feb 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: KV100, VI )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**KEJA FARMS**  
 BOX 808  
 ASSINIBOIA, SK  
 CA S0H 0B0  
 Contact: Service Manager  
 JRJ@SASKTEL.NET  
 T: (306)642-8551  
 F: