




# OIL ANALYSIS REPORT

Sample Rating Trend

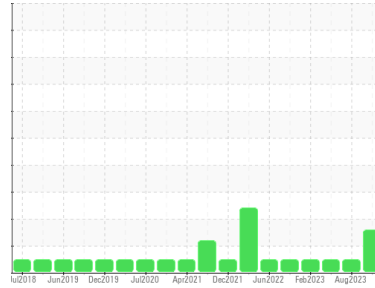

**DIRT**



Machine Id  
**801064**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (20 LTR)**

## DIAGNOSIS

### ▲ Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a moderate concentration of dirt present in the oil.

### Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0110734</b>  | GFL0077298  | GFL0070450  |
| Sample Date   | Client Info |             | <b>15 Feb 2024</b> | 04 Aug 2023 | 05 May 2023 |
| Machine Age   | hrs         | Client Info | <b>3111</b>        | 0           | 3111        |
| Oil Age       | hrs         | Client Info | <b>3111</b>        | 0           | 2481        |
| Oil Changed   | Client Info |             | <b>Changed</b>     | N/A         | Changed     |
| Sample Status |             |             | <b>ABNORMAL</b>    | NORMAL      | NORMAL      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|           | method | limit/base    | current | history1     | history2 |    |
|-----------|--------|---------------|---------|--------------|----------|----|
| Iron      | ppm    | ASTM D5185(m) | >100    | <b>13</b>    | 9        | 8  |
| Chromium  | ppm    | ASTM D5185(m) | >20     | <b>&lt;1</b> | <1       | <1 |
| Nickel    | ppm    | ASTM D5185(m) | >4      | <b>&lt;1</b> | 0        | <1 |
| Titanium  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | <1 |
| Silver    | ppm    | ASTM D5185(m) | >3      | <b>0</b>     | <1       | 0  |
| Aluminum  | ppm    | ASTM D5185(m) | >20     | <b>2</b>     | 1        | 2  |
| Lead      | ppm    | ASTM D5185(m) | >40     | <b>0</b>     | 0        | 0  |
| Copper    | ppm    | ASTM D5185(m) | >330    | <b>2</b>     | 2        | 1  |
| Tin       | ppm    | ASTM D5185(m) | >15     | <b>0</b>     | 0        | 0  |
| Antimony  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | <1 |
| Vanadium  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | 0  |
| Beryllium | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | 0  |
| Cadmium   | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        | 0  |

## ADDITIVES

|            | method | limit/base    | current | history1     | history2 |      |
|------------|--------|---------------|---------|--------------|----------|------|
| Boron      | ppm    | ASTM D5185(m) | 0       | <b>2</b>     | 3        | 1    |
| Barium     | ppm    | ASTM D5185(m) | 0       | <b>0</b>     | 0        | 0    |
| Molybdenum | ppm    | ASTM D5185(m) | 60      | <b>56</b>    | 56       | 56   |
| Manganese  | ppm    | ASTM D5185(m) | 0       | <b>0</b>     | <1       | <1   |
| Magnesium  | ppm    | ASTM D5185(m) | 1010    | <b>907</b>   | 926      | 931  |
| Calcium    | ppm    | ASTM D5185(m) | 1070    | <b>1007</b>  | 991      | 1041 |
| Phosphorus | ppm    | ASTM D5185(m) | 1150    | <b>967</b>   | 1004     | 1028 |
| Zinc       | ppm    | ASTM D5185(m) | 1270    | <b>1129</b>  | 1143     | 1158 |
| Sulfur     | ppm    | ASTM D5185(m) | 2060    | <b>2473</b>  | 2362     | 2455 |
| Lithium    | ppm    | ASTM D5185(m) |         | <b>&lt;1</b> | <1       | <1   |

## CONTAMINANTS

|           | method | limit/base    | current | history1    | history2 |    |
|-----------|--------|---------------|---------|-------------|----------|----|
| Silicon   | ppm    | ASTM D5185(m) | >25     | <b>▲ 34</b> | 3        | 2  |
| Sodium    | ppm    | ASTM D5185(m) |         | <b>1</b>    | 2        | 2  |
| Potassium | ppm    | ASTM D5185(m) | >20     | <b>1</b>    | 1        | <1 |


## INFRA-RED

|           | method  | limit/base  | current | history1    | history2 |      |
|-----------|---------|-------------|---------|-------------|----------|------|
| Soot %    | %       | ASTM D7844* | >3      | <b>0.2</b>  | 0.2      | 0.2  |
| Nitration | Abs/cm  | ASTM D7624* | >20     | <b>8.9</b>  | 9.5      | 8.3  |
| Sulfation | Abs.1mm | ASTM D7415* | >30     | <b>19.5</b> | 20.6     | 19.5 |



# OIL ANALYSIS REPORT

▲ Silicon (ppm)

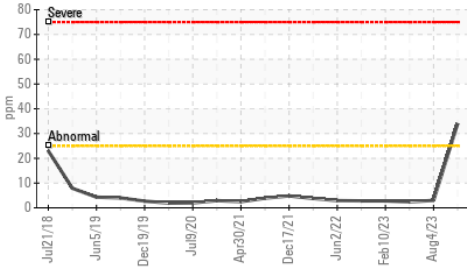

### FLUID DEGRADATION

| method    | limit/base           | current | history1 | history2 |
|-----------|----------------------|---------|----------|----------|
| Oxidation | Abs./1mm ASTM D7414* | >25     | 17.0     | 16.6     |

### VISUAL


| method           | limit/base     | current | history1 | history2 |
|------------------|----------------|---------|----------|----------|
| Emulsified Water | scalar Visual* | >0.2    | NEG      | NEG      |
| Free Water       | scalar Visual* | NEG     | NEG      | NEG      |

### FLUID PROPERTIES


| method       | limit/base        | current | history1 | history2 |
|--------------|-------------------|---------|----------|----------|
| Visc @ 100°C | cSt ASTM D7279(m) | 15.4    | 13.1     | 13.5     |

### GRAPHS


Viscosity @ 100°C

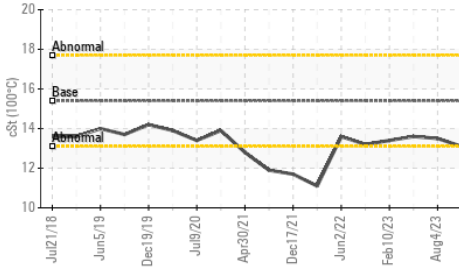


Iron (ppm)

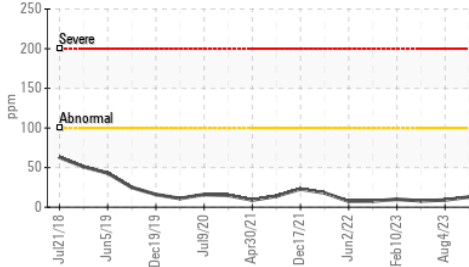


Lead (ppm)

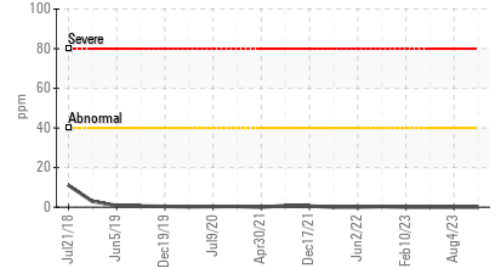


Aluminum (ppm)

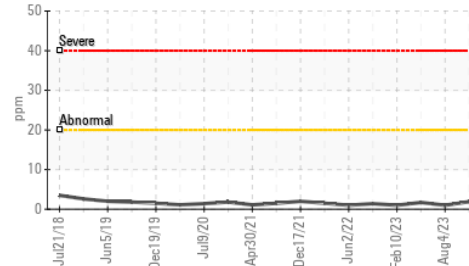


Chromium (ppm)

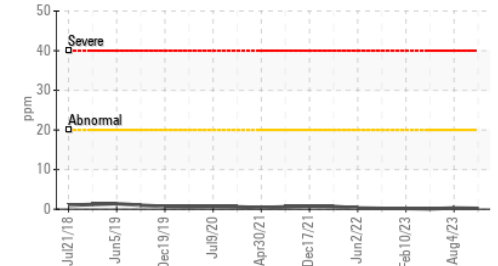


Copper (ppm)

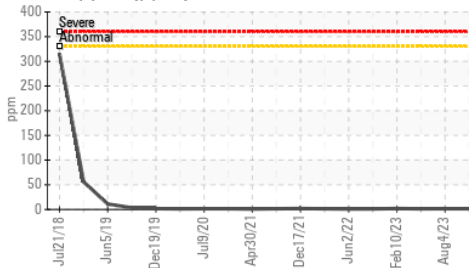


▲ Silicon (ppm)

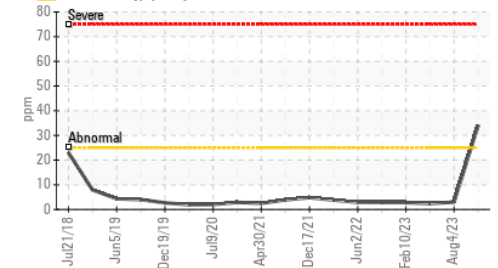

Viscosity @ 100°C

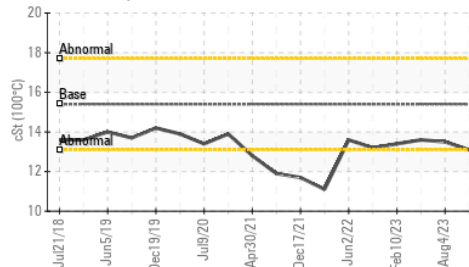

Soot %

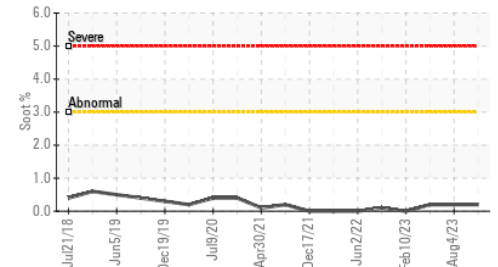

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0110734  
**Lab Number** : 02616943  
**Unique Number** : 5734053  
**Test Package** : MOB 1

**GFL Environmental - 221 - Windsor**  
 905 Tecumseh Road W  
 Windsor, ON  
 CA N8W 4J5  
 Contact: Rhys Marotte  
 rmarotte@gflenv.com

**Received** : 21 Feb 2024  
**Tested** : 22 Feb 2024  
**Diagnosed** : 22 Feb 2024 - Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: