


# **OIL ANALYSIS REPORT**

# [450267793] Machine Id GLS WIVEL BARRIER

Component

**Unknown Component** 

PETRO CANADA TURBOFLO EP 46 (--- GAL)



## DIAGNOSIS

### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please provide more complete information on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the sample.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the sample is suitable for further

				eb 2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PC		
Sample Date		Client Info		19 Feb 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
PQ		ASTM D8184*		1		
Iron	ppm	ASTM D5185(m)		0		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		<1		
Lead	ppm	ASTM D5185(m)		0		
Copper	ppm	ASTM D5185(m)		0		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		0		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		<1		
Calcium	ppm	ASTM D5185(m)		<1		
Phosphorus	ppm	ASTM D5185(m)	280	281		
Zinc	ppm	ASTM D5185(m)	0.0	<1		
Sulfur	ppm	ASTM D5185(m)		736		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		0		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
FLUID DEGRA	OITAC	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	.10	0.07		



# **OIL ANALYSIS REPORT**

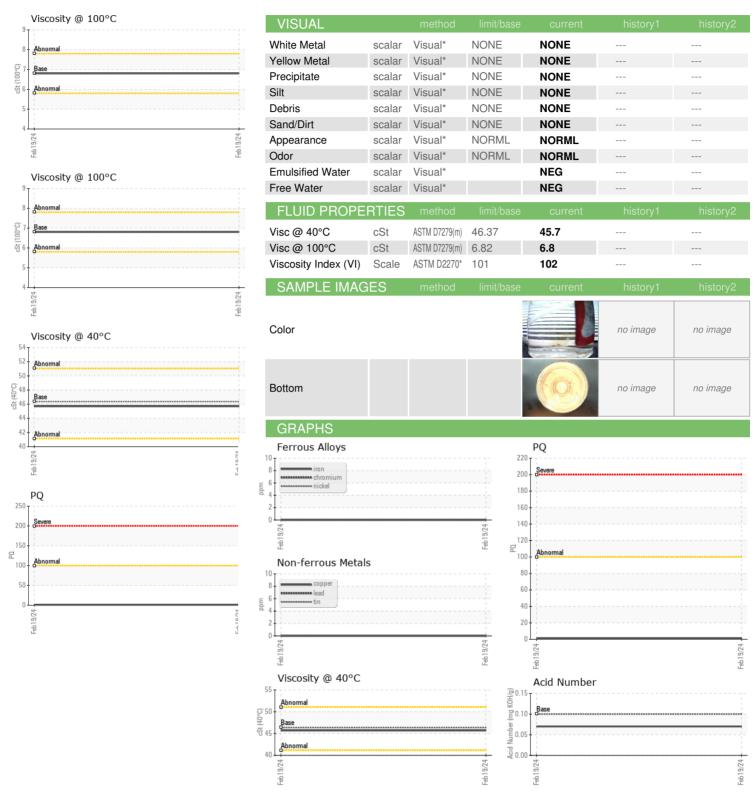





Laboratory Sample No. Lab Number

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : PC

: 02617041 Unique Number : 5734151

Test Package: MAR 2 (Additional Tests: KV100, VI) To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Received

Diagnosed

**Tested** 

: 21 Feb 2024

: 22 Feb 2024

: 22 Feb 2024 - Kevin Marson

**Suncor - Terra Nova Projects** 

Scotia Centre, 235 Water Strret St. John's, NL CA A1C 1B6 Contact: Josh Hynes

joshynes@suncor.com T: (709)778-3575 F: (709)724-2835