


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
K600
Component
Reciprocating Compressor
Fluid
PETRO CANADA SENTRON LD 3000 (--- LTR)

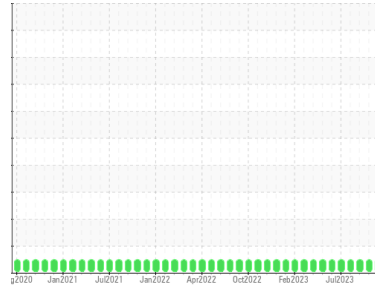

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0085506	PC0085491	PC90000913
Sample Date	Client Info		16 Feb 2024	17 Jan 2024	25 Oct 2023
Machine Age	hrs	Client Info	30859	30149	28203
Oil Age	hrs	Client Info	0	0	1846
Oil Changed	Client Info		Not Chngd	N/A	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	<1	<1	0
Chromium	ppm	ASTM D5185(m)	>10	0	0	0
Nickel	ppm	ASTM D5185(m)		0	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		<1	0	0
Aluminum	ppm	ASTM D5185(m)	>25	1	1	1
Lead	ppm	ASTM D5185(m)	>25	<1	<1	0
Copper	ppm	ASTM D5185(m)	>50	4	3	5
Tin	ppm	ASTM D5185(m)	>15	<1	<1	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	5	<1	<1	1
Barium	ppm	ASTM D5185(m)	1	0	0	0
Molybdenum	ppm	ASTM D5185(m)	2	0	0	0
Manganese	ppm	ASTM D5185(m)	1	0	0	0
Magnesium	ppm	ASTM D5185(m)	5	7	6	6
Calcium	ppm	ASTM D5185(m)	1220	1230	1222	1148
Phosphorus	ppm	ASTM D5185(m)	298	264	260	269
Zinc	ppm	ASTM D5185(m)	350	303	298	305
Sulfur	ppm	ASTM D5185(m)	1995	2172	2132	---
Lithium	ppm	ASTM D5185(m)		<1	<1	0






CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	1	1	2
Sodium	ppm	ASTM D5185(m)		<1	<1	0
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	0
Water	%	ASTM D6304*	>0.1	0.007	0.002	---
ppm Water	ppm	ASTM D6304*	>1000	76	23	---

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>1300	177	145	---
Particles >6µm	ASTM D7647	>640	57	54	---
Particles >14µm	ASTM D7647	>160	6	6	---
Particles >21µm	ASTM D7647	>40	2	2	---
Particles >38µm	ASTM D7647	>10	1	0	---
Particles >71µm	ASTM D7647	>3	1	0	---
Oil Cleanliness	ISO 4406 (c)	>17/16/14	15/13/10	14/13/10	---

OIL ANALYSIS REPORT

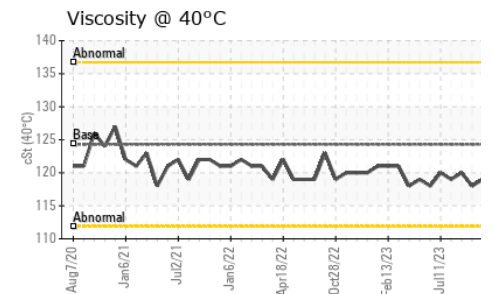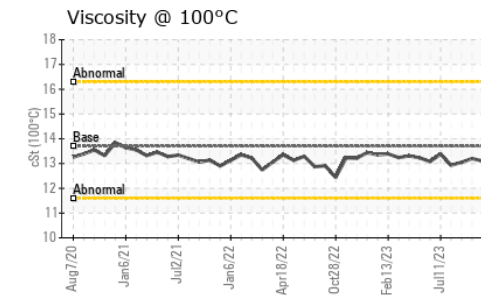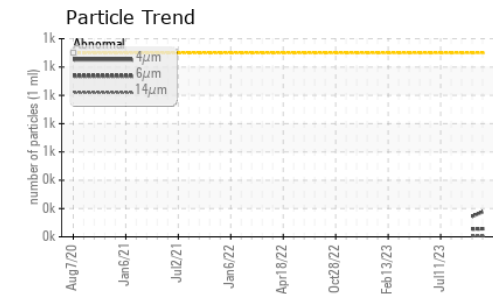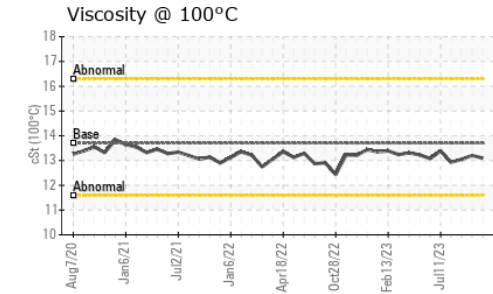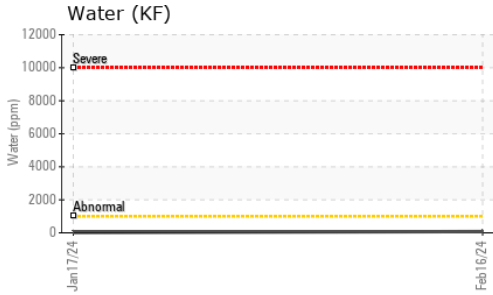





FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.86	0.52	0.24	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	124.3	119	118	120
Visc @ 100°C	cSt	ASTM D7279(m)	13.7	13.1	13.2	13.05
Viscosity Index (VI)	Scale	ASTM D2270*	106	104	106	102

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						no image
Bottom						no image

GRAPHS

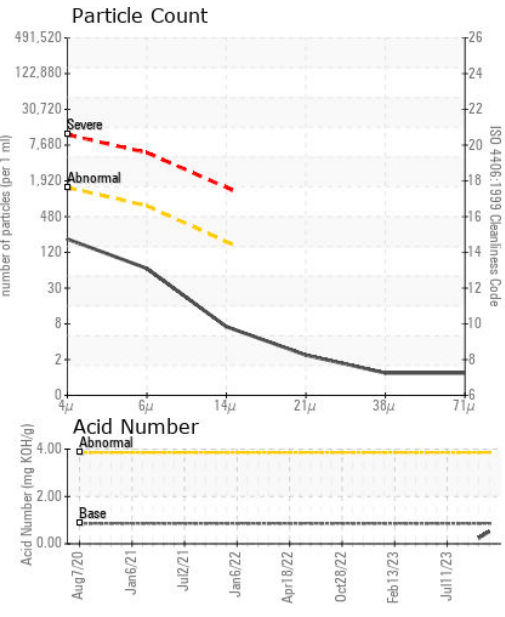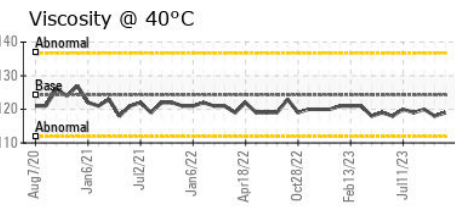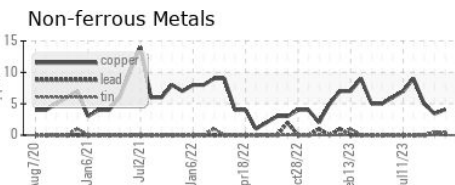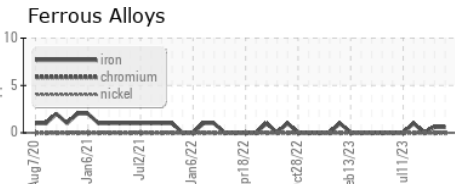

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0085506 **Received** : 23 Feb 2024
Lab Number : **02617660** **Tested** : 27 Feb 2024
Unique Number : 5734770 **Diagnosed** : 27 Feb 2024 - Wes Davis
Test Package : PLANT (Additional Tests: KF, KV100, VI)

NuVista Energy
 10508 67 Ave, #201
 Grande Prairie, AB
 CA T8W 0K8
 Contact: Eldon Weaver
 eweaver@nvaenergy.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.