


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**K602**  
Component  
**Reciprocating Compressor**  
Fluid  
**PETRO CANADA SENTRON LD 3000 (--- LTR)**

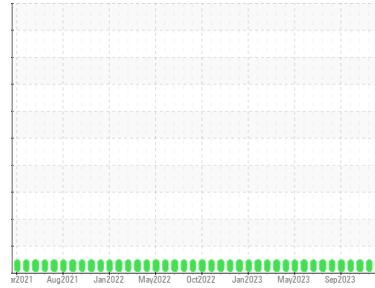

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PC0085496</b>	PC0085489	PC90000738
Sample Date	Client Info		<b>09 Feb 2024</b>	17 Jan 2024	25 Oct 2023
Machine Age	hrs	Client Info	<b>32173</b>	31640	29657
Oil Age	hrs	Client Info	<b>0</b>	0	548
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	<b>&lt;1</b>	<1	0
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)		<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>25	<b>1</b>	1	0
Lead	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185(m)	>50	<b>3</b>	3	2
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	5	<b>&lt;1</b>	<1	0
Barium	ppm	ASTM D5185(m)	1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	2	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	1	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	5	<b>7</b>	7	5
Calcium	ppm	ASTM D5185(m)	1220	<b>1268</b>	1258	1006
Phosphorus	ppm	ASTM D5185(m)	298	<b>275</b>	270	239
Zinc	ppm	ASTM D5185(m)	350	<b>299</b>	297	257
Sulfur	ppm	ASTM D5185(m)	1995	<b>2123</b>	2121	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0






## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>1</b>	1	2
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	0
Water	%	ASTM D6304*	>0.1	<b>0.005</b>	0.002	---
ppm Water	ppm	ASTM D6304*	>1000	<b>59</b>	21	---

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>1300	<b>136</b>	195	---
Particles >6µm	ASTM D7647	>640	<b>47</b>	69	---
Particles >14µm	ASTM D7647	>160	<b>5</b>	8	---
Particles >21µm	ASTM D7647	>40	<b>3</b>	3	---
Particles >38µm	ASTM D7647	>10	<b>1</b>	1	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>17/16/14	<b>14/13/10</b>	15/13/10	---

# OIL ANALYSIS REPORT

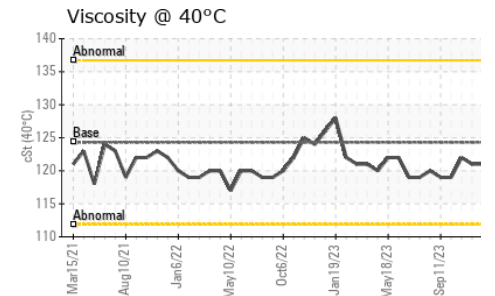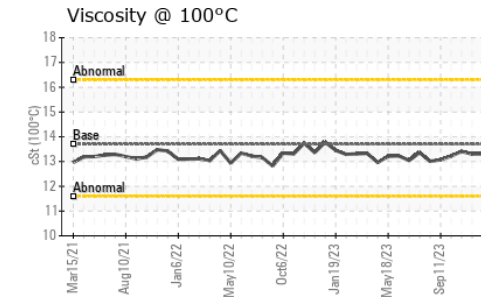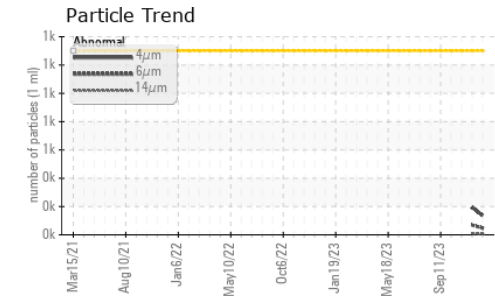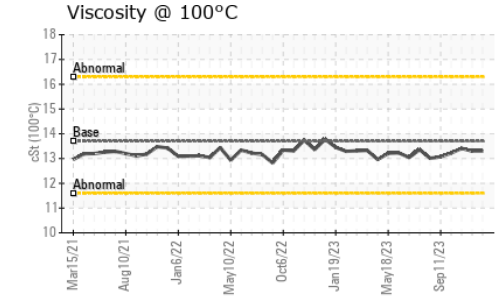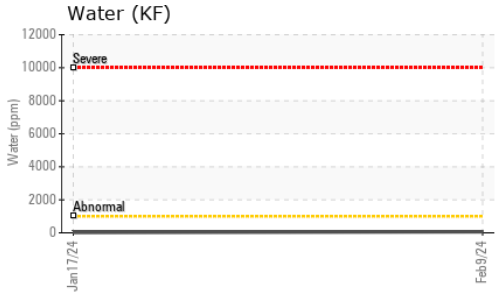





FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.86	<b>0.26</b>	0.44	1.11

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	---
Free Water	scalar	Visual*		<b>NEG</b>	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	124.3	<b>121</b>	121	122
Visc @ 100°C	cSt	ASTM D7279(m)	13.7	<b>13.3</b>	13.3	13.41
Viscosity Index (VI)	Scale	ASTM D2270*	106	<b>104</b>	104	105

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						no image
Bottom						no image

## GRAPHS

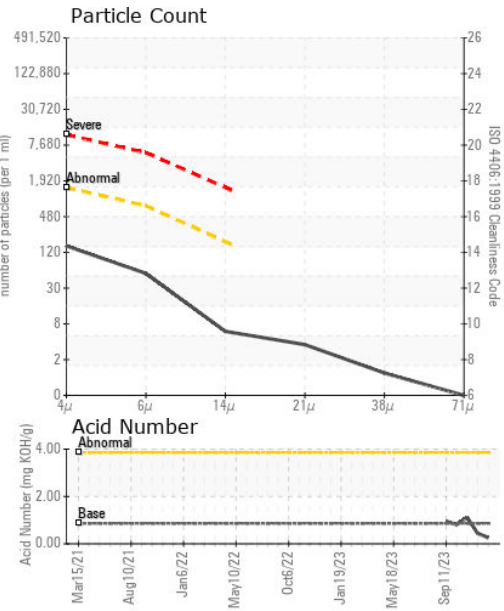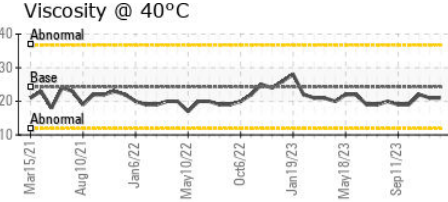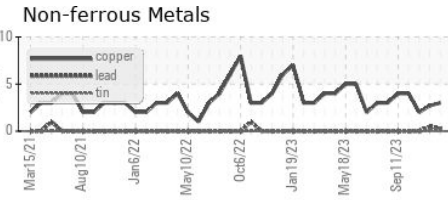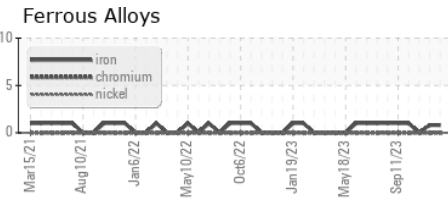

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0085496  
**Lab Number** : 02617666  
**Unique Number** : 5734776  
**Test Package** : PLANT ( Additional Tests: KF, KV100, VI )  
**Received** : 23 Feb 2024  
**Tested** : 27 Feb 2024  
**Diagnosed** : 27 Feb 2024 - Wes Davis

**NuVista Energy**  
 10508 67 Ave, #201  
 Grande Prairie, AB  
 CA T8W 0K8  
 Contact: Eldon Weaver  
 eweaver@nvaenergy.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.