




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

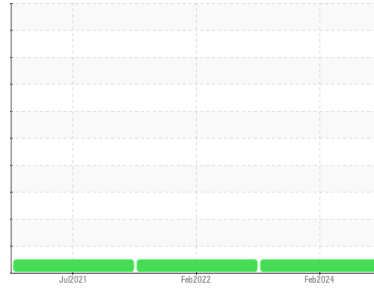

Machine Id

**2215**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SAE 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0108242</b>	GFL0024248	GFL0024256
Sample Date	Client Info		<b>21 Feb 2024</b>	10 Feb 2022	08 Jul 2021
Machine Age	hrs	Client Info	<b>14092</b>	13114	12899
Oil Age	hrs	Client Info	<b>250</b>	0	400
Oil Changed	Client Info		<b>N/A</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>200	<b>21</b>	9	20
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>30	<b>2</b>	1	2
Lead	ppm	ASTM D5185(m)	>30	<b>3</b>	1	<1
Copper	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	1	<b>1</b>	12	142
Barium	ppm	ASTM D5185(m)	1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	1	<b>59</b>	52	1
Manganese	ppm	ASTM D5185(m)	1	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	10	<b>965</b>	934	91
Calcium	ppm	ASTM D5185(m)	2942	<b>1042</b>	1091	2018
Phosphorus	ppm	ASTM D5185(m)	1102	<b>1034</b>	1027	988
Zinc	ppm	ASTM D5185(m)	1351	<b>1179</b>	1178	1117
Sulfur	ppm	ASTM D5185(m)	3903	<b>2790</b>	2648	2855
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>30	<b>6</b>	7	7
Sodium	ppm	ASTM D5185(m)		<b>2</b>	1	4
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	1	4

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	<b>0.3</b>	0	0.2
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.3</b>	6.0	7.7
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>18.8</b>	19.3	21.2



# OIL ANALYSIS REPORT








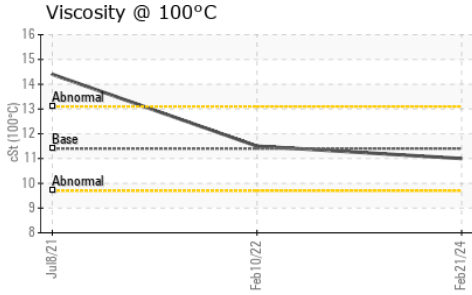


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>15.0</b>	14.1	16.6

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	11.4	<b>11.0</b>	11.5	14.4

## GRAPHS

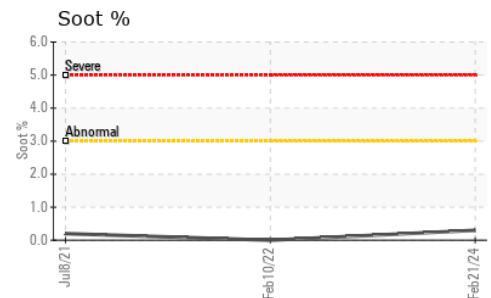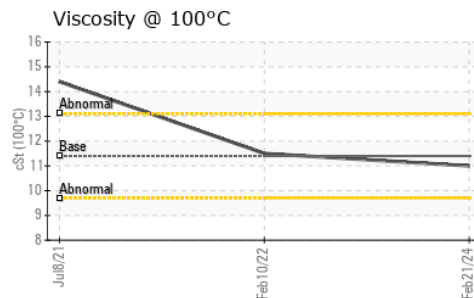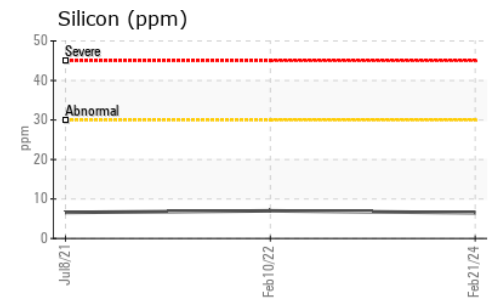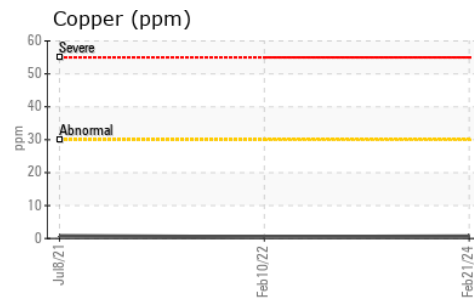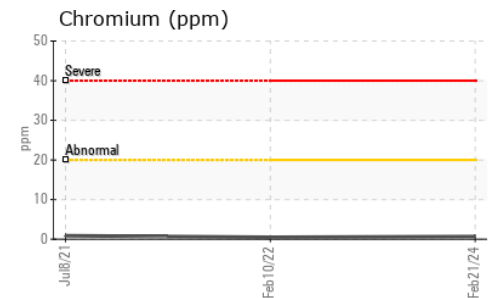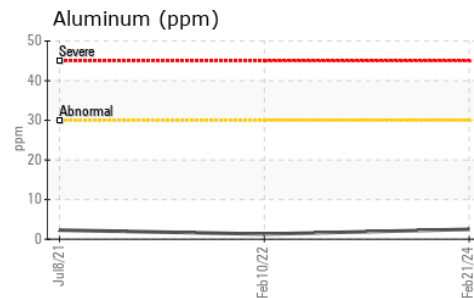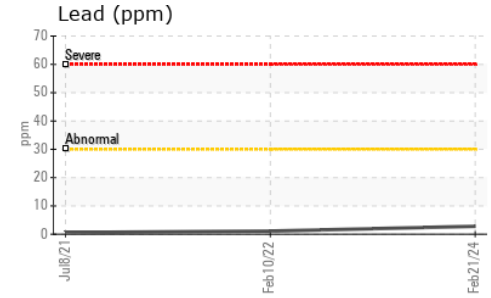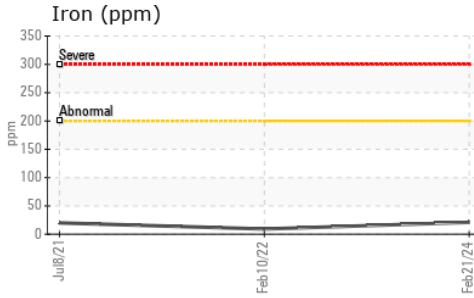

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 355 - Saskatoon**  
**Sample No.** : GFL0108242 **Received** : 26 Feb 2024 100 Cory Road  
**Lab Number** : **02617998** **Tested** : 26 Feb 2024 Saskatoon, SK  
**Unique Number** : 5735108 **Diagnosed** : 26 Feb 2024 - Wes Davis CA S7K 3J7  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Ryan Polichuk  
 rpolichuk@gflenv.com  
 T: (306)244-9500  
 F: