



Machine Id
FORD 174771

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 5W30 (--- GAL)



DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PC0085553	---	---
Sample Date	Client Info	14 Feb 2024	---	---
Machine Age	kms Client Info	42077	---	---
Oil Age	kms Client Info	0	---	---
Oil Changed	Client Info	Not Chngd	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	---	---
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >100	11	---	---
Chromium	ppm ASTM D5185(m) >20	<1	---	---
Nickel	ppm ASTM D5185(m) >2	<1	---	---
Titanium	ppm ASTM D5185(m) >2	0	---	---
Silver	ppm ASTM D5185(m) >2	0	---	---
Aluminum	ppm ASTM D5185(m) >25	2	---	---
Lead	ppm ASTM D5185(m) >40	0	---	---
Copper	ppm ASTM D5185(m) >330	2	---	---
Tin	ppm ASTM D5185(m) >15	<1	---	---
Antimony	ppm ASTM D5185(m)	0	---	---
Vanadium	ppm ASTM D5185(m)	0	---	---
Beryllium	ppm ASTM D5185(m)	0	---	---
Cadmium	ppm ASTM D5185(m)	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 250	76	---	---
Barium	ppm ASTM D5185(m) 10	0	---	---
Molybdenum	ppm ASTM D5185(m) 100	71	---	---
Manganese	ppm ASTM D5185(m)	0	---	---
Magnesium	ppm ASTM D5185(m) 450	521	---	---
Calcium	ppm ASTM D5185(m) 3000	1238	---	---
Phosphorus	ppm ASTM D5185(m) 1150	666	---	---
Zinc	ppm ASTM D5185(m) 1350	733	---	---
Sulfur	ppm ASTM D5185(m) 4250	2419	---	---
Lithium	ppm ASTM D5185(m)	<1	---	---





CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	27	---	---
Sodium	ppm ASTM D5185(m)	2	---	---
Potassium	ppm ASTM D5185(m) >20	<1	---	---
Fuel	% ASTM D7593* >5	▲ 5.2	---	---

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	0	---	---
Nitration	Abs/cm ASTM D7624* >20	10.6	---	---
Sulfation	Abs./1mm ASTM D7415* >30	20.0	---	---

OIL ANALYSIS REPORT





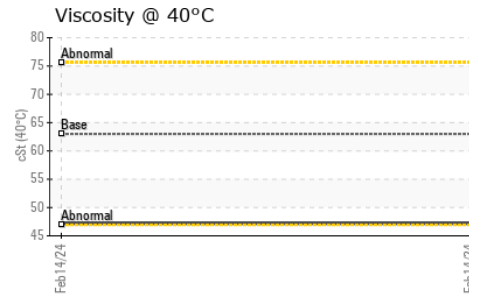
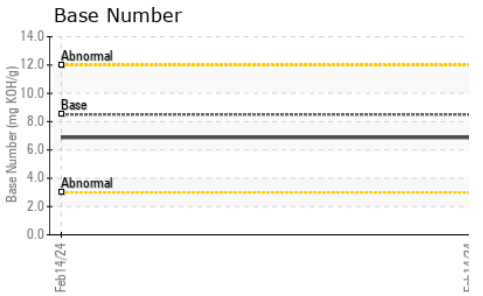
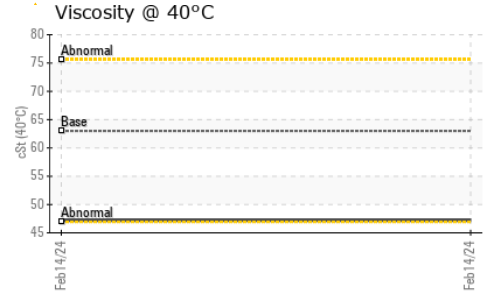
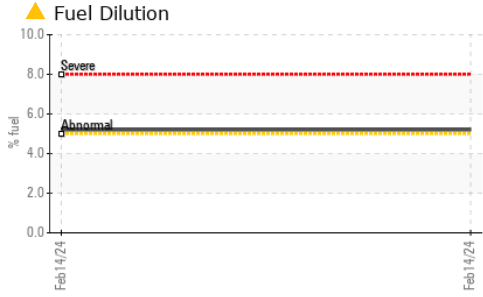


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	14.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*	8.5	6.88	---	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	63	47.2	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	▲ 9	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	165	175	---	---

GRAPHS

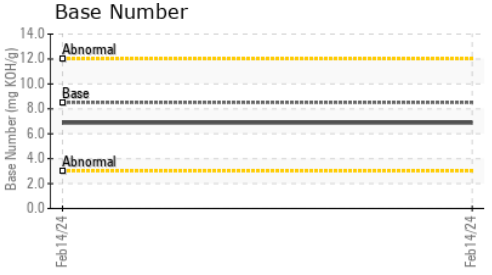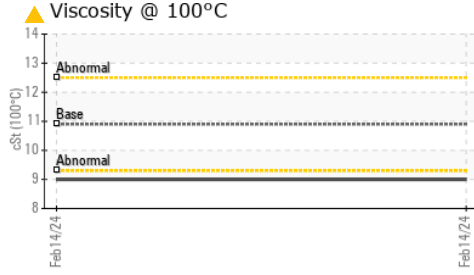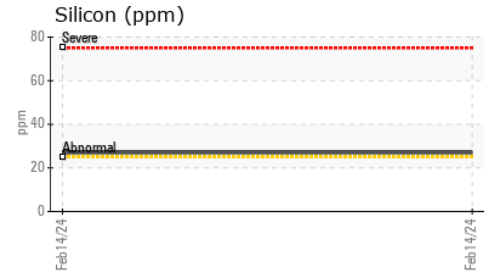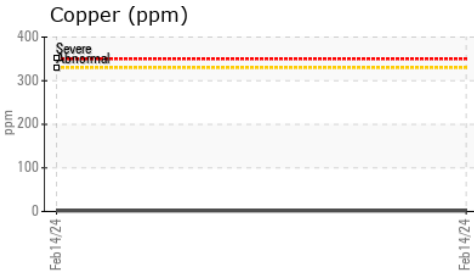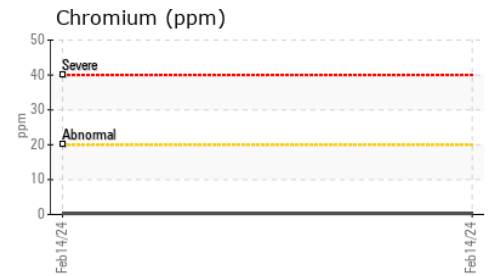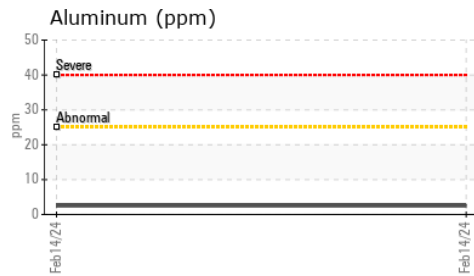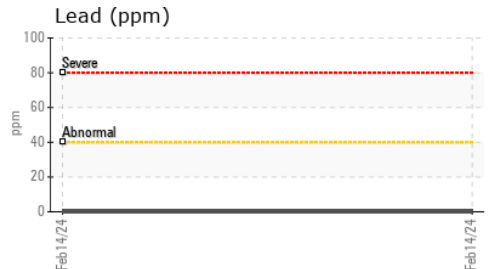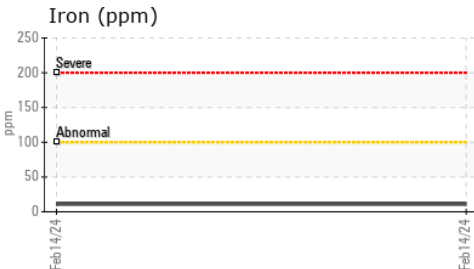

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0085553 **Received** : 26 Feb 2024
Lab Number : **02618005** **Tested** : 27 Feb 2024
Unique Number : 5735115 **Diagnosed** : 27 Feb 2024 - Wes Davis
Test Package : MOB 2 (Additional Tests: FuelDilution, KV40, PercentFuel, VI)

UPS CANADA
 2900 STEELES AVE W
 CONCORD, ON
 CA L4K 3S2
 Contact: Service Manager
 Behshad.Sabah@HFSinclair.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.