




# OIL ANALYSIS REPORT

Sample Rating Trend

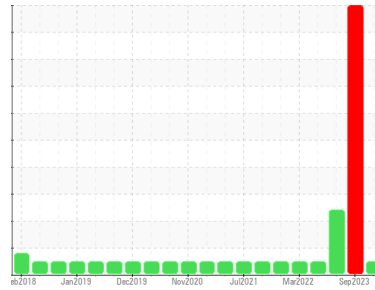

**NORMAL**



Machine Id  
**701044**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (20 LTR)**

## DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Test for glycol is negative. There is no indication of any contamination in the oil.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0110732</b>	GFL0085679	GFL0059869
Sample Date	Client Info		<b>23 Feb 2024</b>	29 Sep 2023	07 Feb 2023
Machine Age	hrs	Client Info	<b>560</b>	560	0
Oil Age	hrs	Client Info	<b>560</b>	560	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	SEVERE	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	<b>63</b>	36	24
Chromium	ppm	ASTM D5185(m)	>20	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	2	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>7</b>	▲ 90	3
Lead	ppm	ASTM D5185(m)	>40	<b>4</b>	24	<1
Copper	ppm	ASTM D5185(m)	>330	<b>140</b>	▲ 897	2
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	2	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>5</b>	8	2
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>20</b>	133	58
Manganese	ppm	ASTM D5185(m)	0	<b>2</b>	6	<1
Magnesium	ppm	ASTM D5185(m)	1010	<b>61</b>	45	909
Calcium	ppm	ASTM D5185(m)	1070	<b>2190</b>	1008	1075
Phosphorus	ppm	ASTM D5185(m)	1150	<b>824</b>	752	970
Zinc	ppm	ASTM D5185(m)	1270	<b>1000</b>	834	1149
Sulfur	ppm	ASTM D5185(m)	2060	<b>2786</b>	2539	2445
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS




	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>11</b>	10	7
Sodium	ppm	ASTM D5185(m)		<b>82</b>	● 809	● 196
Potassium	ppm	ASTM D5185(m)	>20	<b>55</b>	▲ 1959	▲ 121
Glycol	%	ASTM D7922*		<b>0.0</b>	▲ 1.341	0.0

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	<b>0.4</b>	0.1	0.3
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.4</b>	14.3	10.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>22.0</b>	17.2	22.6



# OIL ANALYSIS REPORT






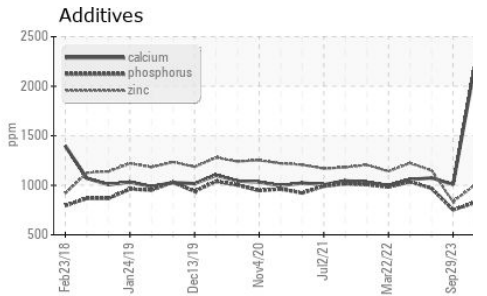
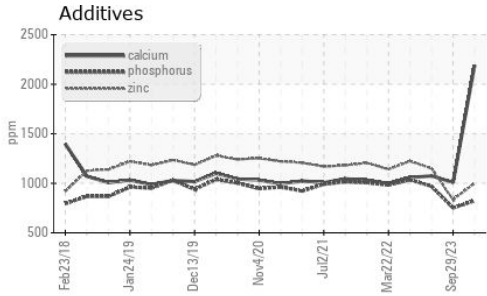
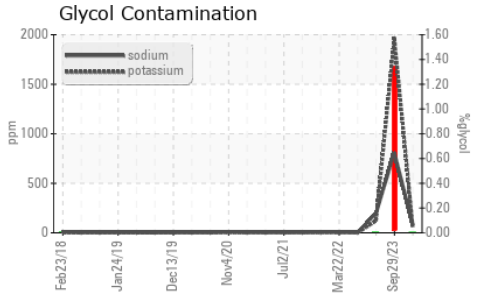


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>14.2</b>	12.5	18.5

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>13.6</b>	16.4	13.6

## GRAPHS

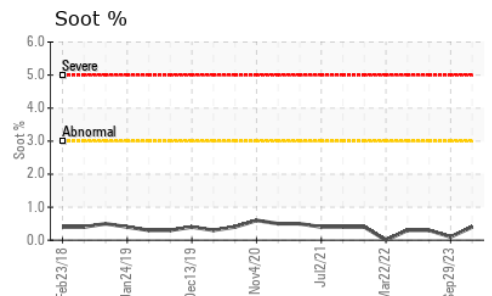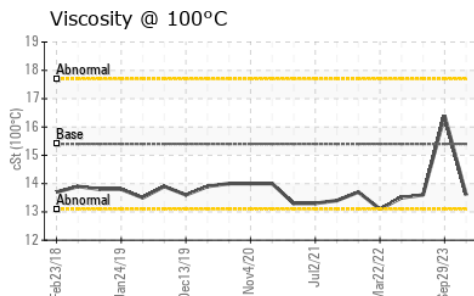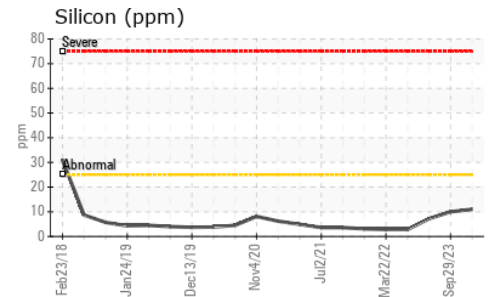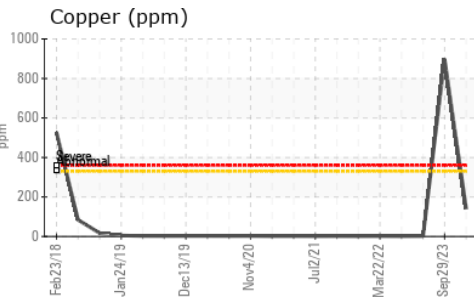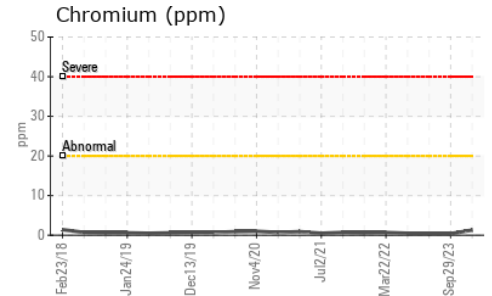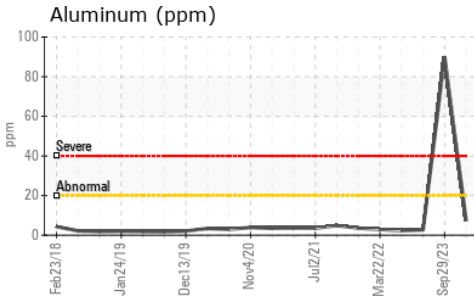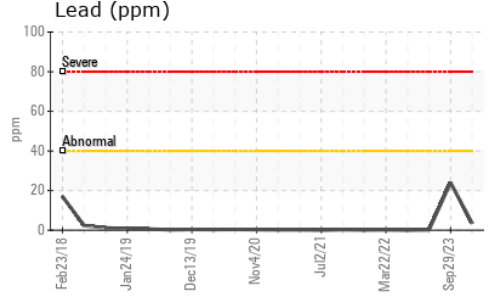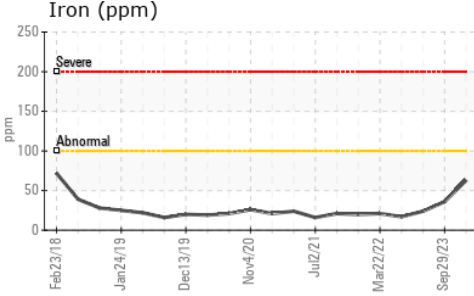

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0110732  
**Lab Number** : **02618837**  
**Unique Number** : 5735947  
**Test Package** : MOB 1  
**Received** : 29 Feb 2024  
**Tested** : 29 Feb 2024  
**Diagnosed** : 29 Feb 2024 - Wes Davis

**GFL Environmental - 221 - Windsor**  
 905 Tecumseh Road W  
 Windsor, ON  
 CA N8W 4J5  
 Contact: Rhys Marotte  
 rmarotte@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.