




# OIL ANALYSIS REPORT

Sample Rating Trend

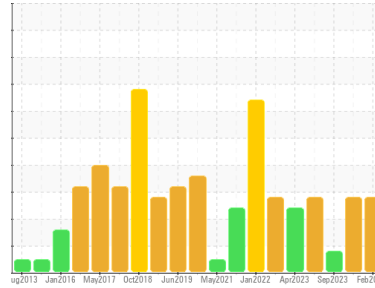

FUEL



Machine Id  
**8979**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (40 LTR)**

## DIAGNOSIS

### ▲ Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### ▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0113166</b>	GFL0107869	GFL0093619
Sample Date	Client Info		<b>23 Feb 2024</b>	09 Jan 2024	14 Sep 2023
Machine Age	kms	Client Info	<b>169574</b>	163734	162752
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	N/A	Changed
Sample Status			<b>SEVERE</b>	SEVERE	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>90	<b>48</b>	37	6
Chromium	ppm	ASTM D5185(m)	>20	<b>3</b>	2	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>3</b>	3	<1
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>2</b>	2	2
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>38</b>	43	54
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	1010	<b>615</b>	681	895
Calcium	ppm	ASTM D5185(m)	1070	<b>664</b>	750	966
Phosphorus	ppm	ASTM D5185(m)	1150	<b>653</b>	718	1013
Zinc	ppm	ASTM D5185(m)	1270	<b>743</b>	831	1093
Sulfur	ppm	ASTM D5185(m)	2060	<b>1658</b>	1813	2438
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>4</b>	3	2
Sodium	ppm	ASTM D5185(m)		<b>2</b>	5	2
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	0
Fuel	%	ASTM D7593*	>3.0	<b>▲ 27.7</b>	▲ 19.6	▲ 5.4

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>6	<b>3.3</b>	2.6	0.7
Nitration	Abs/cm	ASTM D7624*	>20	<b>14.4</b>	13.4	6.1
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>27.0</b>	26.3	18.8



# OIL ANALYSIS REPORT







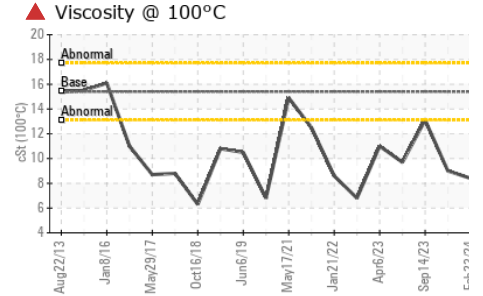
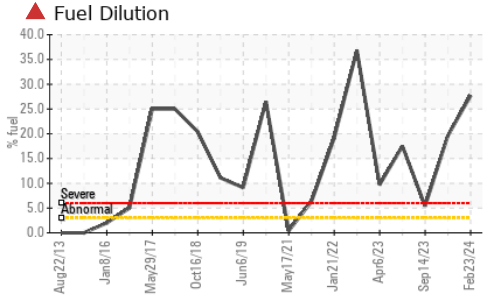


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>24.8</b>	25.2	13.1

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>▲ 8.4</b>	▲ 9	13.1

## GRAPHS

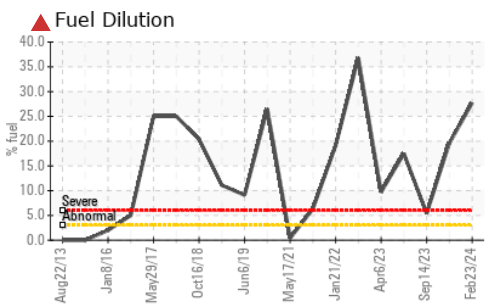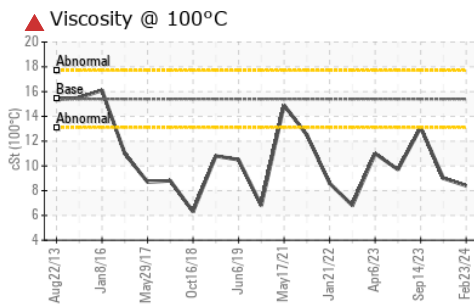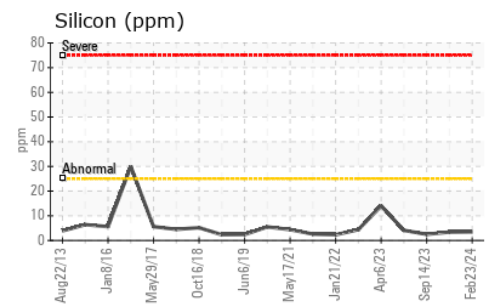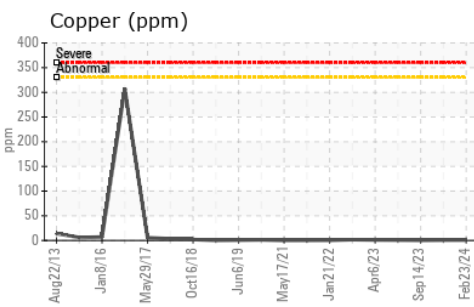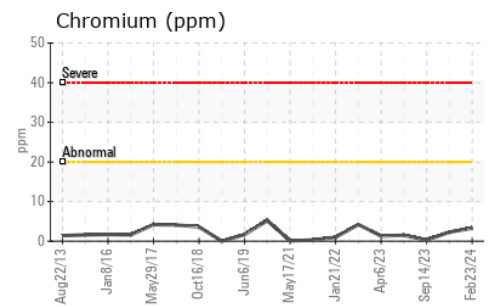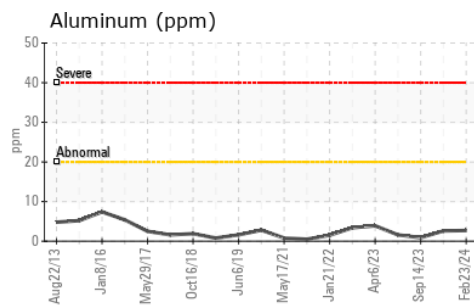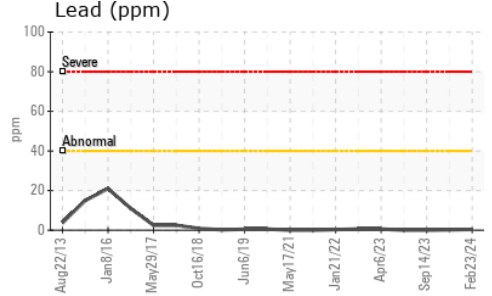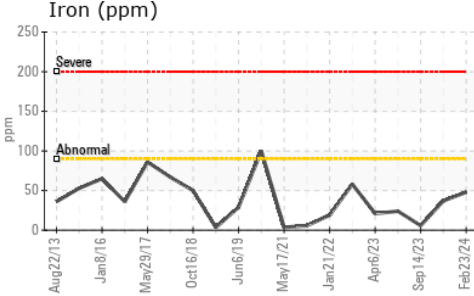

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0113166 **Received** : 29 Feb 2024  
**Lab Number** : 02618847 **Tested** : 01 Mar 2024  
**Unique Number** : 5735957 **Diagnosed** : 01 Mar 2024 - Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: PercentFuel )

**GFL Environmental - 225 - COT(D2)**  
 20 Brydon Drive  
 Etobicoke, ON  
 CA M9W 5R6  
 Contact: Rick Philip  
 rphilip@gflenv.com  
 T: (416)745-8080  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.