




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

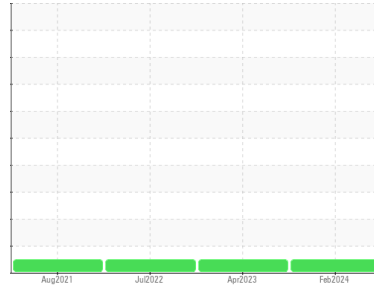

Machine Id  
**731004**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0100725</b>	GFL0041646	GFL0041673
Sample Date	Client Info		<b>23 Feb 2024</b>	06 Apr 2023	05 Jul 2022
Machine Age	kms	Client Info	<b>80831</b>	56200	51933
Oil Age	kms	Client Info	<b>0</b>	1176	0
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>---</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	<b>15</b>	11	16
Chromium	ppm	ASTM D5185(m)	>4	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>9	<b>2</b>	1	2
Lead	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	0	1
Copper	ppm	ASTM D5185(m)	>35	<b>1</b>	<1	2
Tin	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	50	<b>7</b>	17	8
Barium	ppm	ASTM D5185(m)	5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	50	<b>55</b>	48	60
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185(m)	560	<b>578</b>	532	611
Calcium	ppm	ASTM D5185(m)	1510	<b>1681</b>	1575	1648
Phosphorus	ppm	ASTM D5185(m)	780	<b>721</b>	804	746
Zinc	ppm	ASTM D5185(m)	870	<b>941</b>	874	998
Sulfur	ppm	ASTM D5185(m)	2040	<b>2133</b>	2155	2212
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>+100	<b>4</b>	4	6
Sodium	ppm	ASTM D5185(m)		<b>2</b>	3	4
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	<1

## INFRA-RED


	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.4</b>	8.9	12.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>25.3</b>	22.4	24.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>20.6</b>	16.4	20.1











# OIL ANALYSIS REPORT

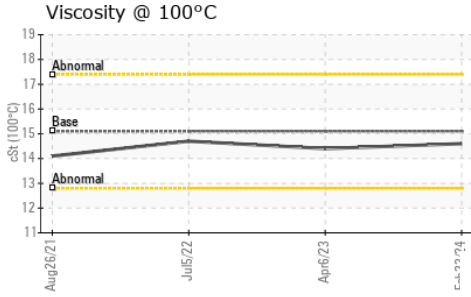

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.1	14.4	14.7

## GRAPHS

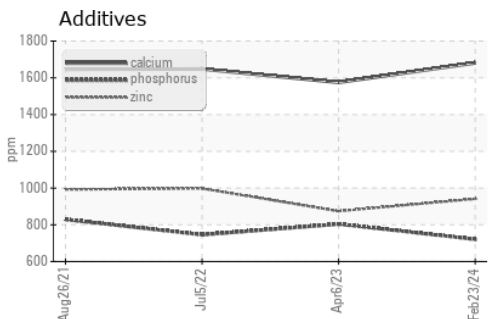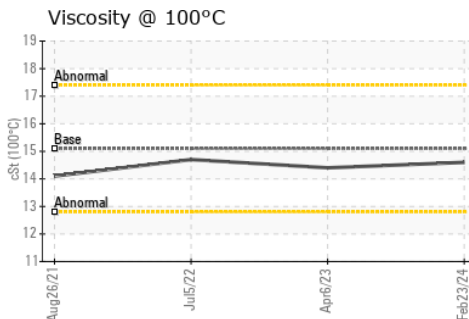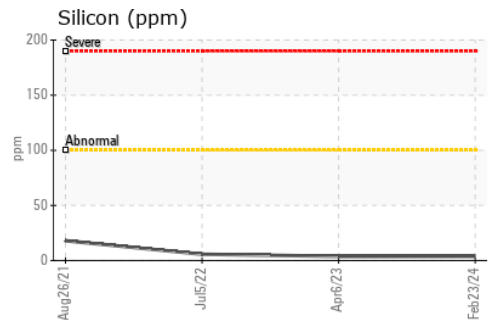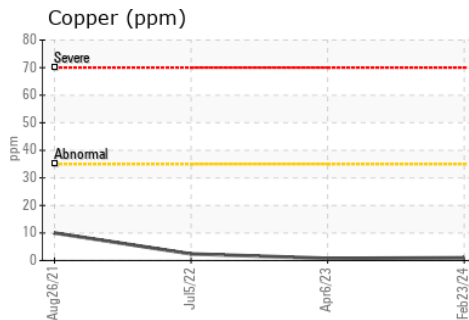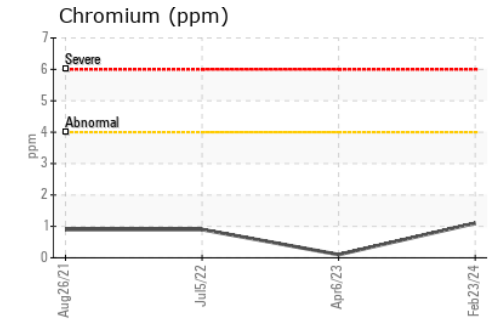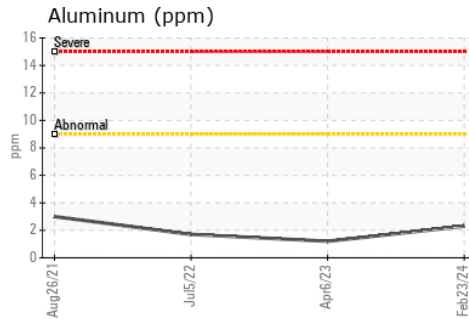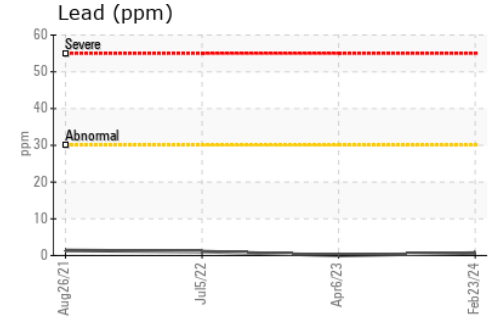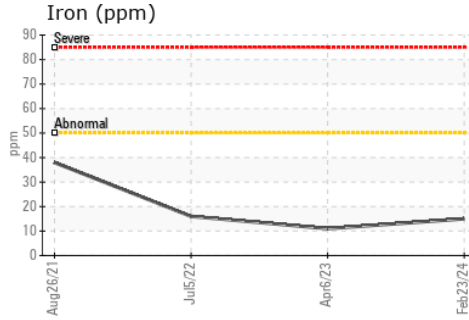

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0100725  
**Lab Number** : 02618937  
**Unique Number** : 5736047  
**Test Package** : MOB 1

**GFL Environmental - 277 - Niagara Regional**  
 C/O Metro Truck Niagara Inc., 411 Glendale Avenue  
 St. Catharines, ON  
 CA L2P 3Y1  
 Contact: Kelly Bremner  
 kbremner@gflenv.com  
 T: (437)235-6849  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.