


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

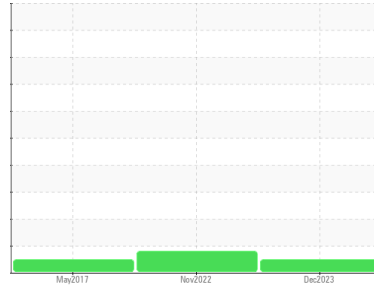

Machine Id  
**FREIGHTLINER 30039**  
Component  
**Front Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (16 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0075200</b>	PC0067602	AP105322
Sample Date	Client Info			<b>28 Dec 2023</b>	24 Nov 2022	11 May 2017
Machine Age	mths	Client Info		<b>0</b>	290687	152636
Oil Age	mths	Client Info		<b>6</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	MARGINAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	▲ 3.1	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG




WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>130	<b>11</b>	19	11
Chromium	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	1	2
Lead	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	6
Copper	ppm	ASTM D5185(m)	>125	<b>2</b>	2	6
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1	1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	<b>4</b>	33	40
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)	100	<b>59</b>	58	<1
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	450	<b>942</b>	1016	8
Calcium	ppm	ASTM D5185(m)	3000	<b>1004</b>	971	2391
Phosphorus	ppm	ASTM D5185(m)	1150	<b>991</b>	1026	1001
Zinc	ppm	ASTM D5185(m)	1350	<b>1133</b>	1164	1195
Sulfur	ppm	ASTM D5185(m)	4250	<b>2668</b>	2754	3282
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>6</b>	7	3
Sodium	ppm	ASTM D5185(m)	>158	<b>32</b>	2	3
Potassium	ppm	ASTM D5185(m)	>20	<b>4</b>	<1	1
Glycol	%	ASTM D7922*		<b>0.0</b>	NEG	NEG

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	<b>0.2</b>	0.3	0.2
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.1</b>	11.1	10.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>20.9</b>	25.7	25.0

# OIL ANALYSIS REPORT






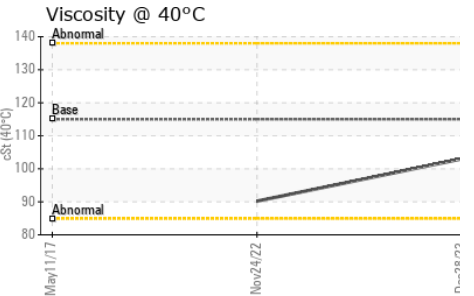
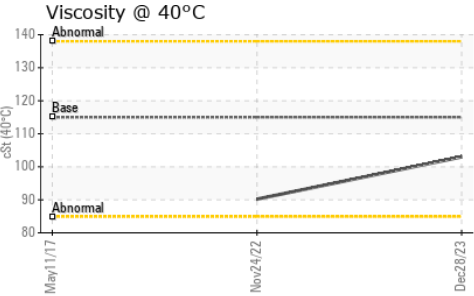
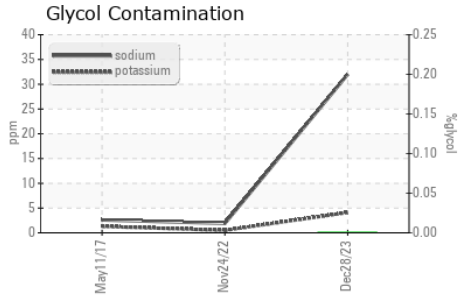


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>18.5</b>	25.1	19.6

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	115	<b>103</b>	90.2	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	<b>14.3</b>	12.9	14.6
Viscosity Index (VI)	Scale	ASTM D2270*	126	<b>142</b>	141	---

## GRAPHS

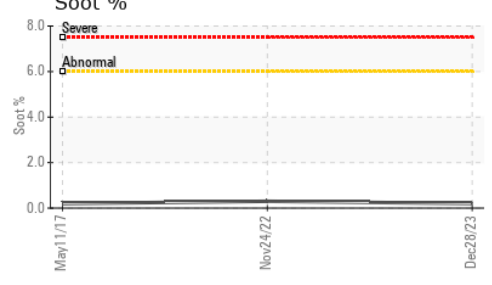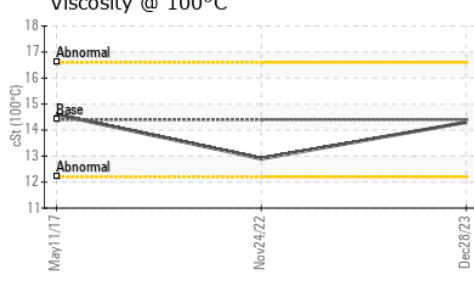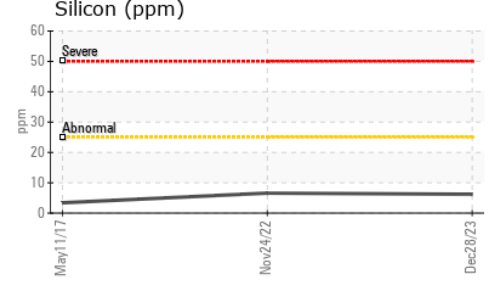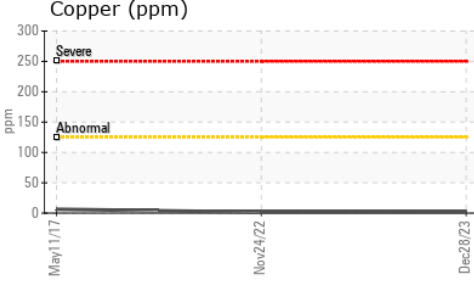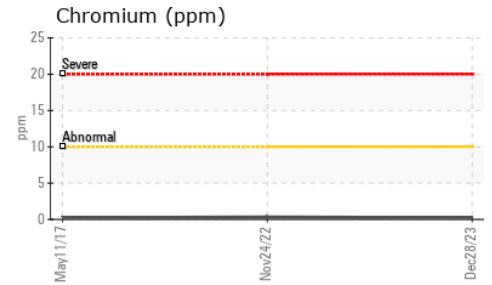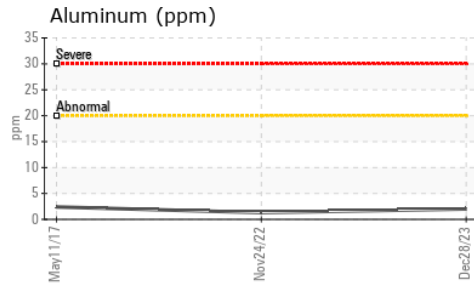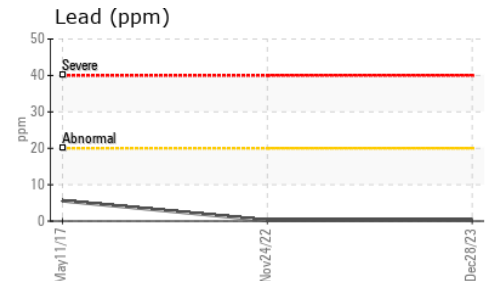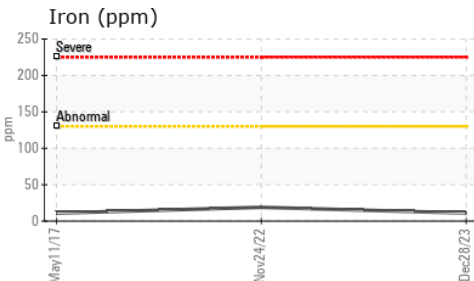

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0075200 **Received** : 01 Mar 2024  
**Lab Number** : **02619144** **Tested** : 01 Mar 2024  
**Unique Number** : 5736254 **Diagnosed** : 01 Mar 2024 - Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: Glycol, KV40, VI )

**TORONTO FIRE SERVICES**  
 40 TORYORK DRIVE  
 TORONTO, ON  
 CA M9L 1X6  
 Contact: Antonio Rodrigues  
 antonio.rodrigues@toronto.ca  
 T:  
 F: (416)338-9207

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.