




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

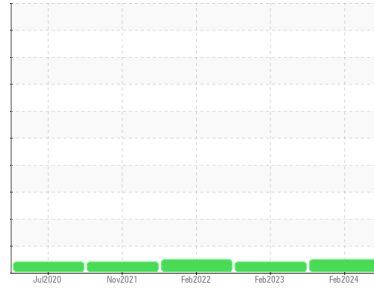

Machine Id
901008
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0110652	GFL0035520	GFL0035529
Sample Date	Client Info		28 Feb 2024	14 Feb 2023	15 Feb 2022
Machine Age	hrs	Client Info	13612	11881	9946
Oil Age	hrs	Client Info	600	600	600
Oil Changed	Client Info		Changed	N/A	Changed
Sample Status			NORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	1.3	2.7
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>120	7	16	8
Chromium	ppm	ASTM D5185(m)	>20	0	0	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	0	<1
Titanium	ppm	ASTM D5185(m)	>2	0	<1	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	2	4	2
Lead	ppm	ASTM D5185(m)	>40	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>330	1	1	2
Tin	ppm	ASTM D5185(m)	>15	0	<1	<1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	14	25	3
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	50	58	84	58
Manganese	ppm	ASTM D5185(m)	0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	950	635	49	962
Calcium	ppm	ASTM D5185(m)	1050	1470	2178	1009
Phosphorus	ppm	ASTM D5185(m)	995	1021	1072	1049
Zinc	ppm	ASTM D5185(m)	1180	1165	1162	1171
Sulfur	ppm	ASTM D5185(m)	2600	2810	3085	2535
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	3	7	3
Sodium	ppm	ASTM D5185(m)		2	7	6
Potassium	ppm	ASTM D5185(m)	>20	1	2	7

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>4	0.2	0.3	0
Nitration	Abs/cm	ASTM D7624*	>20	9.2	10.7	3.6
Sulfation	Abs./1mm	ASTM D7415*	>30	20.7	23.7	13.2



OIL ANALYSIS REPORT







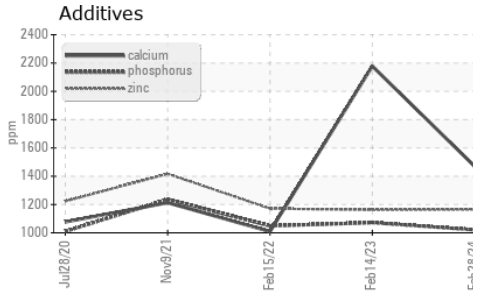
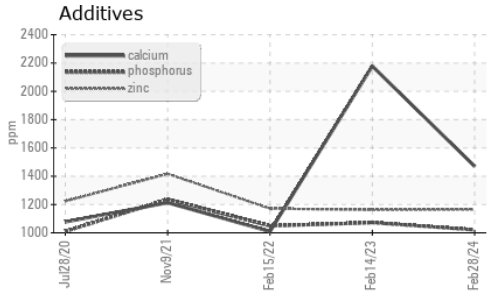


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	17.2	15.9	5.8

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.4	▲ 11.2	12.5

GRAPHS

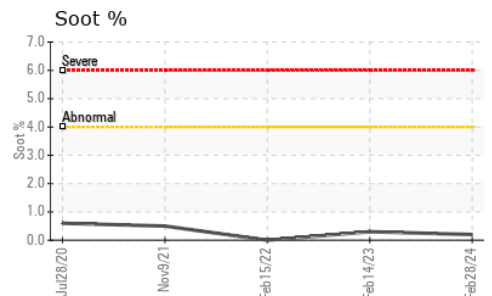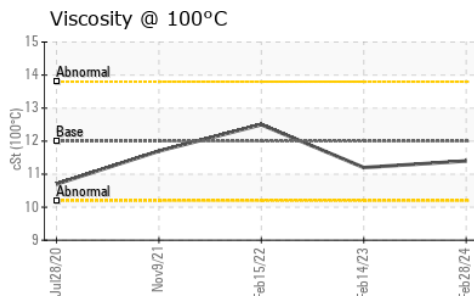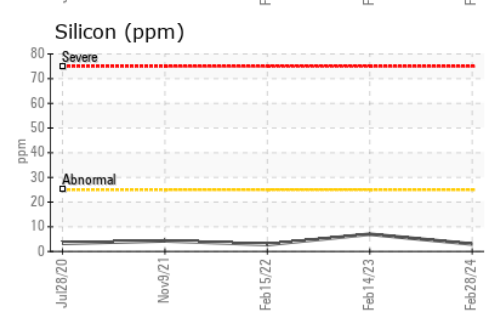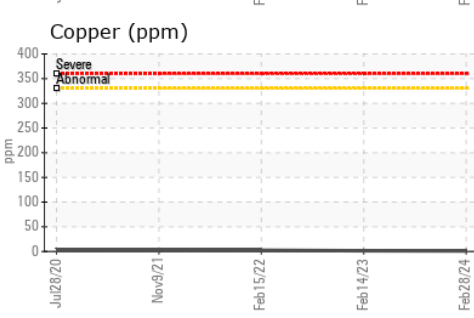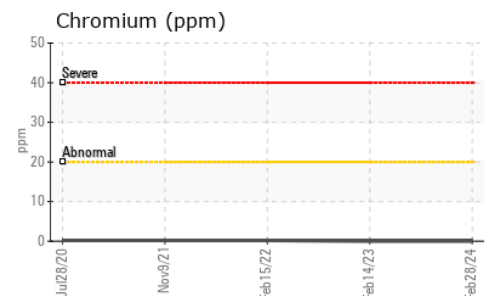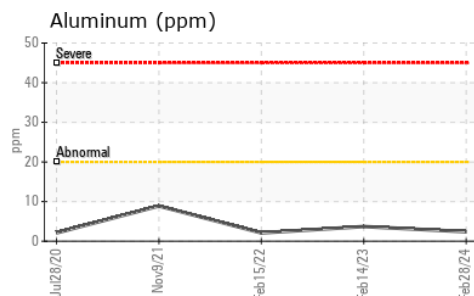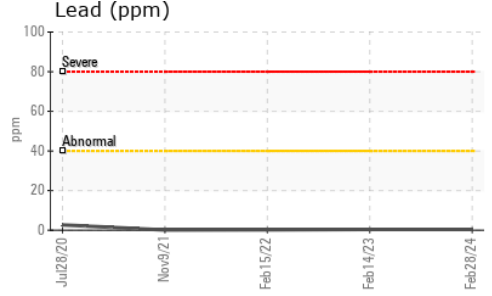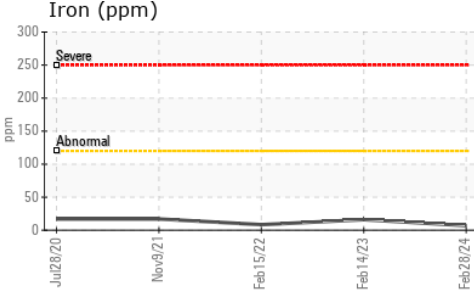

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 213 - Kitchener**
Sample No. : GFL0110652 **Received** : 01 Mar 2024 16 Centennial Road, Kitchener Yard
Lab Number : 02619162 **Tested** : 01 Mar 2024 Kitchener, ON
Unique Number : 5736272 **Diagnosed** : 01 Mar 2024 - Wes Davis CA N2B 3G1
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.