


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

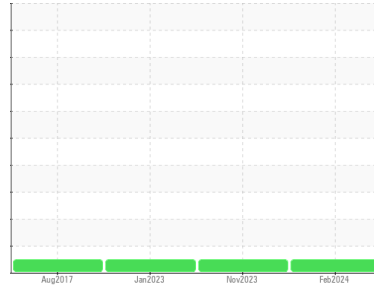

Machine Id  
**E-ONE 25064/R122**

Component  
**Front Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (28 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0085026</b>	PC	PC0067226
Sample Date	Client Info			<b>09 Feb 2024</b>	05 Nov 2023	26 Jan 2023
Machine Age	mths	Client Info		<b>0</b>	0	140498
Oil Age	mths	Client Info		<b>6</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>75	<b>20</b>	20	21
Chromium	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>15	<b>4</b>	2	3
Lead	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>100	<b>4</b>	3	3
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	<b>2</b>	2	5
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)	100	<b>59</b>	62	61
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	450	<b>925</b>	968	962
Calcium	ppm	ASTM D5185(m)	3000	<b>1044</b>	1041	1087
Phosphorus	ppm	ASTM D5185(m)	1150	<b>929</b>	943	1010
Zinc	ppm	ASTM D5185(m)	1350	<b>1115</b>	1181	1149
Sulfur	ppm	ASTM D5185(m)	4250	<b>2595</b>	2444	2555
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>8</b>	4	9
Sodium	ppm	ASTM D5185(m)	>158	<b>5</b>	7	7
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	2	3

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	<b>0.8</b>	0.9	0.8
Nitration	Abs/cm	ASTM D7624*	>20	<b>11.8</b>	12.5	11.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>25.9</b>	26.0	26.9

# OIL ANALYSIS REPORT







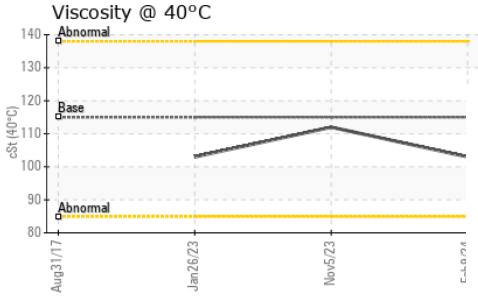
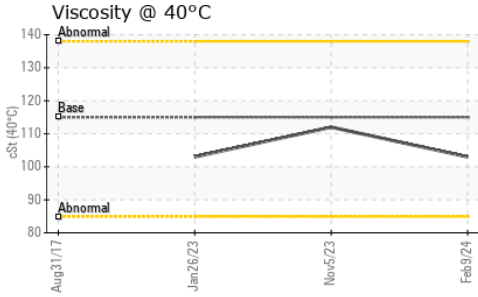


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>23.5</b>	23.4	22.1

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	115	<b>103</b>	112	103
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	<b>13.9</b>	14.9	13.8
Viscosity Index (VI)	Scale	ASTM D2270*	126	<b>136</b>	137	134

## GRAPHS

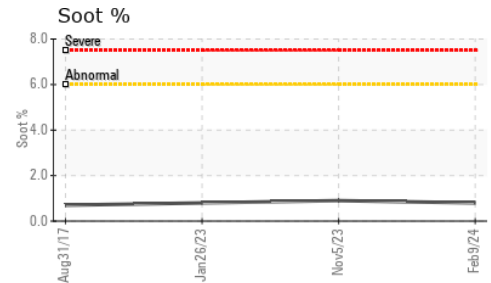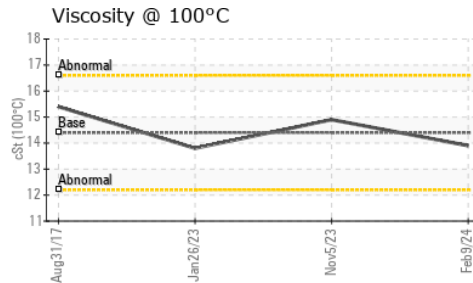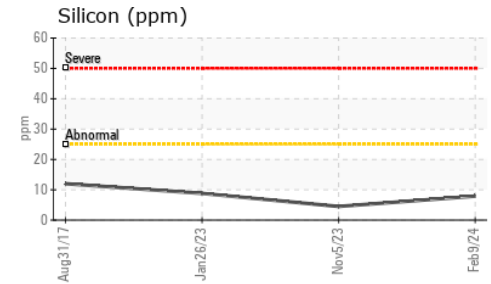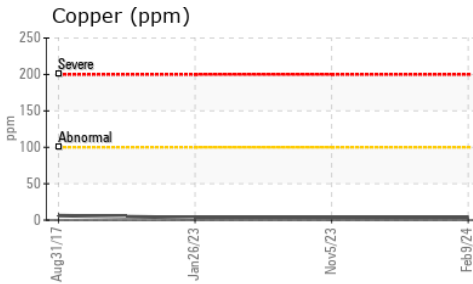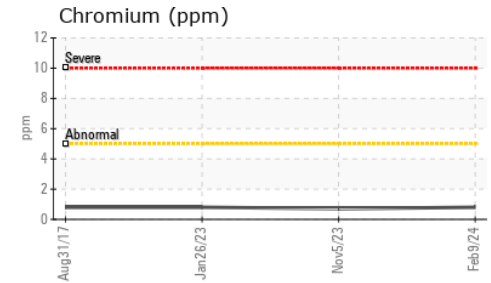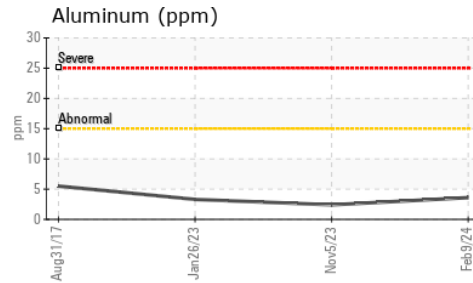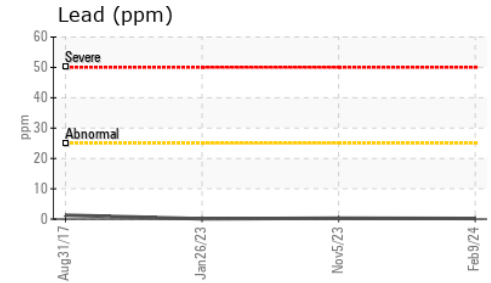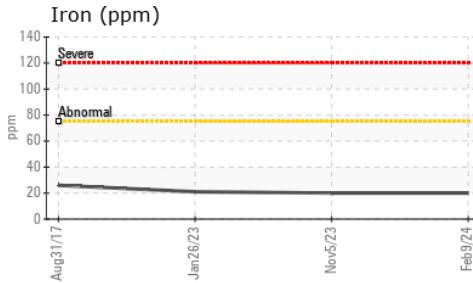

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0085026 **Received** : 01 Mar 2024  
**Lab Number** : **02619208** **Tested** : 01 Mar 2024  
**Unique Number** : 5736318 **Diagnosed** : 01 Mar 2024 - Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI )

**TORONTO FIRE SERVICES**  
 40 TORYORK DRIVE  
 TORONTO, ON  
 CA M9L 1X6  
 Contact: Antonio Rodrigues  
 antonio.rodrigues@toronto.ca  
 T:  
 F: (416)338-9207

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.