


OIL ANALYSIS REPORT



Area
Haul Truck
Machine Id
HT4502
Component
Hydraulic System
Fluid
{not provided} (--- LTR)

Sample Rating Trend

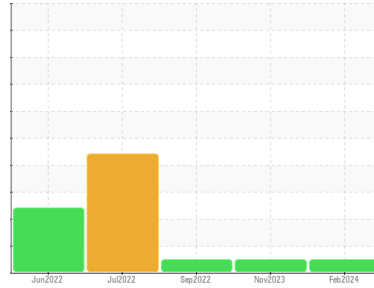

NORMAL

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the component(unconfirmed).

Fluid Condition
The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0074937	PC0074881	PC0048749
Sample Date	Client Info		09 Feb 2024	23 Nov 2023	26 Sep 2022
Machine Age	hrs	Client Info	7882	6729	1944
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	2	2	4
Chromium	ppm	ASTM D5185(m) >10	0	0	0
Nickel	ppm	ASTM D5185(m) >10	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	0	0	<1
Silver	ppm	ASTM D5185(m)	<1	<1	0
Aluminum	ppm	ASTM D5185(m) >10	2	1	2
Lead	ppm	ASTM D5185(m) >10	0	<1	<1
Copper	ppm	ASTM D5185(m) >75	<1	2	2
Tin	ppm	ASTM D5185(m) >10	0	0	0
Antimony	ppm	ASTM D5185(m)	0	0	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0


ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	55	42	68
Barium	ppm	ASTM D5185(m)	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	12	13	6
Manganese	ppm	ASTM D5185(m)	0	0	<1
Magnesium	ppm	ASTM D5185(m)	194	212	93
Calcium	ppm	ASTM D5185(m)	2933	2800	3057
Phosphorus	ppm	ASTM D5185(m)	1067	1001	1111
Zinc	ppm	ASTM D5185(m)	1258	1225	1260
Sulfur	ppm	ASTM D5185(m)	2839	2768	3076
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	9	7	6
Sodium	ppm	ASTM D5185(m)	<1	1	5
Potassium	ppm	ASTM D5185(m) >20	<1	<1	<1


OIL ANALYSIS REPORT

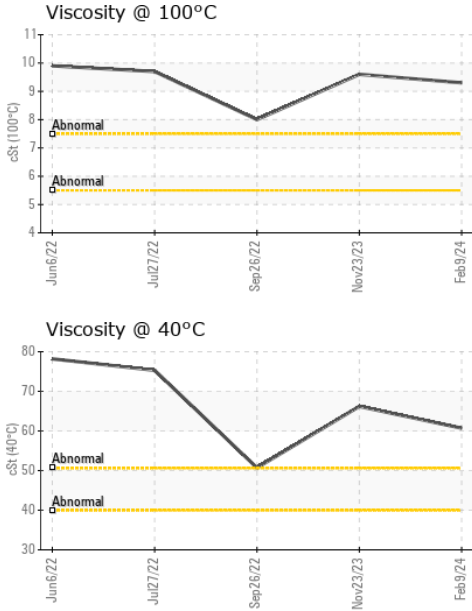

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	60.7	66.2	50.7
Visc @ 100°C	cSt	ASTM D7279(m)	9.3	9.6	8
Viscosity Index (VI)	Scale	ASTM D2270*	133	125	127

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					
PrtFilter			no image	no image	no image

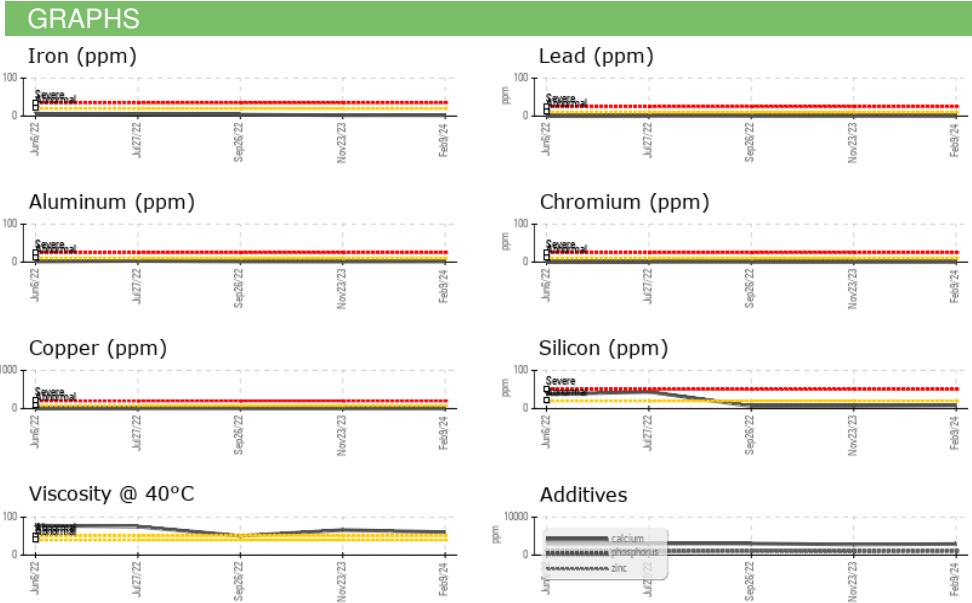

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0074937
Lab Number : 02619589
Unique Number : 5736699
Test Package : MOB 1 (Additional Tests: KV100, VI)

Lakeshore Gold Timmins West

Timmins, ON
 CA
 Contact: Dale Arseneau
 darseneau@ca.panamericansilver.com
 T: (705)269-4344
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.