



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
(L959782)
Machine Id
MACK 9256
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (220 LTR)

DIAGNOSIS

Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Veuillez communiquer avec un représentant GFL Environmental au sujet de l'achat d'une trousse d'échantillonnage appropriée à vos besoins. Notez: nous recommandons d'acheter les trousse MOB 3 pour cet équipement, Cet ensemble de tests inclut la ferrographie analytique qui donne une analyse morphologique détaillée des particules d'usure présentes dans le fluide. Ce test inclut le BN (indice d'alcalinité) pour évaluer si l'huile peut encore servir. (Customer Sample Comment: Changement d'huile moteur)

Wear

Les taux d'usure des composants semblent être normaux (non confirmé).

Contamination

Il n'y a aucun indice de contamination dans l'huile.

Fluid Condition

L'état de l'huile est acceptable pour la durée de service (non confirmée).

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-----------------|--------------------|----------|----------|
| Sample Number | Client Info | GFL0081622 | --- | --- |
| Sample Date | Client Info | 01 Mar 2024 | --- | --- |
| Machine Age | hrs Client Info | 17148 | --- | --- |
| Oil Age | hrs Client Info | 600 | --- | --- |
| Oil Changed | Client Info | Changed | --- | --- |
| Sample Status | | NORMAL | --- | --- |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|----------------|----------------|----------|----------|
| Fuel | WC Method >3.0 | <1.0 | --- | --- |
| Water | WC Method >0.2 | NEG | --- | --- |
| Glycol | WC Method | NEG | --- | --- |

WEAR METALS

| method | limit/base | current | history1 | history2 |
|-----------|------------------------|--------------|----------|----------|
| Iron | ppm ASTM D5185(m) >120 | 16 | --- | --- |
| Chromium | ppm ASTM D5185(m) >20 | 0 | --- | --- |
| Nickel | ppm ASTM D5185(m) >5 | <1 | --- | --- |
| Titanium | ppm ASTM D5185(m) >2 | 0 | --- | --- |
| Silver | ppm ASTM D5185(m) >2 | 0 | --- | --- |
| Aluminum | ppm ASTM D5185(m) >20 | 4 | --- | --- |
| Lead | ppm ASTM D5185(m) >40 | <1 | --- | --- |
| Copper | ppm ASTM D5185(m) >330 | 1 | --- | --- |
| Tin | ppm ASTM D5185(m) >15 | <1 | --- | --- |
| Antimony | ppm ASTM D5185(m) | 0 | --- | --- |
| Vanadium | ppm ASTM D5185(m) | 0 | --- | --- |
| Beryllium | ppm ASTM D5185(m) | 0 | --- | --- |
| Cadmium | ppm ASTM D5185(m) | 0 | --- | --- |

ADDITIVES

| method | limit/base | current | history1 | history2 |
|------------|------------------------|--------------|----------|----------|
| Boron | ppm ASTM D5185(m) 2 | 4 | --- | --- |
| Barium | ppm ASTM D5185(m) 0 | 0 | --- | --- |
| Molybdenum | ppm ASTM D5185(m) 50 | 56 | --- | --- |
| Manganese | ppm ASTM D5185(m) 0 | 0 | --- | --- |
| Magnesium | ppm ASTM D5185(m) 950 | 936 | --- | --- |
| Calcium | ppm ASTM D5185(m) 1050 | 1068 | --- | --- |
| Phosphorus | ppm ASTM D5185(m) 995 | 999 | --- | --- |
| Zinc | ppm ASTM D5185(m) 1180 | 1143 | --- | --- |
| Sulfur | ppm ASTM D5185(m) 2600 | 2989 | --- | --- |
| Lithium | ppm ASTM D5185(m) | <1 | --- | --- |

CONTAMINANTS


| method | limit/base | current | history1 | history2 |
|-----------|-----------------------|----------|----------|----------|
| Silicon | ppm ASTM D5185(m) >25 | 6 | --- | --- |
| Sodium | ppm ASTM D5185(m) | 3 | --- | --- |
| Potassium | ppm ASTM D5185(m) >20 | 4 | --- | --- |

INFRA-RED

| method | limit/base | current | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot % | % ASTM D7844* >4 | 0.1 | --- | --- |
| Nitration | Abs/cm ASTM D7624* >20 | 8.7 | --- | --- |
| Sulfation | Abs./1mm ASTM D7415* >30 | 19.0 | --- | --- |



OIL ANALYSIS REPORT

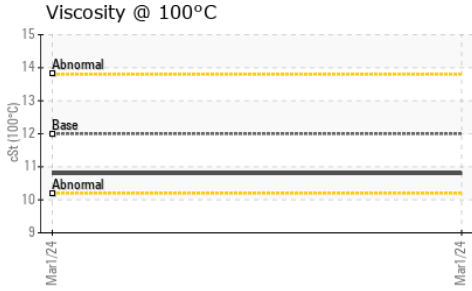

FLUID DEGRADATION

| method | limit/base | current | history1 | history2 | |
|-----------|----------------------|---------|----------|----------|-----|
| Oxidation | Abs./1mm ASTM D7414* | >25 | 15.6 | --- | --- |









VISUAL

| method | limit/base | current | history1 | history2 | |
|------------------|----------------|---------|----------|----------|-----|
| Emulsified Water | scalar Visual* | >0.2 | NEG | --- | --- |
| Free Water | scalar Visual* | | NEG | --- | --- |

FLUID PROPERTIES

| method | limit/base | current | history1 | history2 | |
|--------------|-------------------|---------|----------|----------|-----|
| Visc @ 100°C | cSt ASTM D7279(m) | 12.00 | 10.8 | --- | --- |

GRAPHS

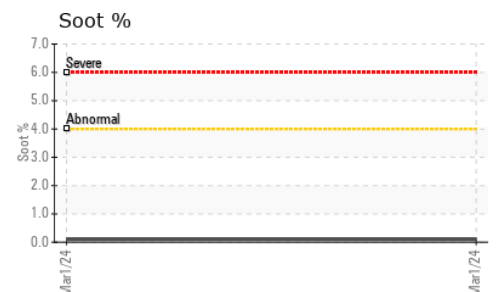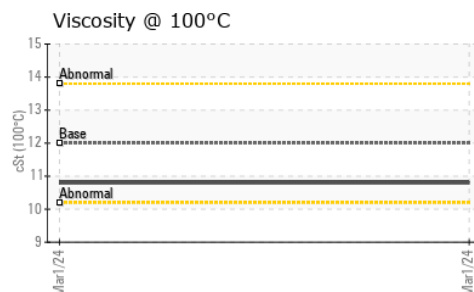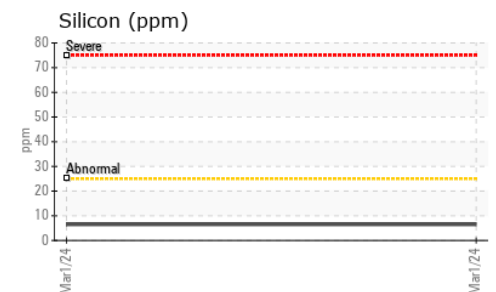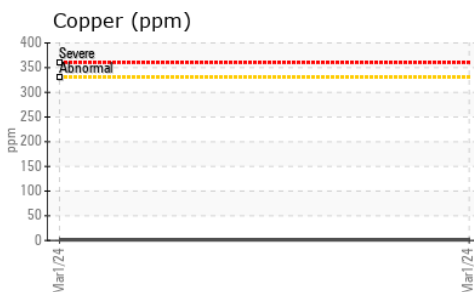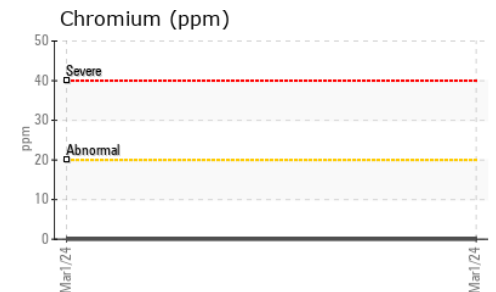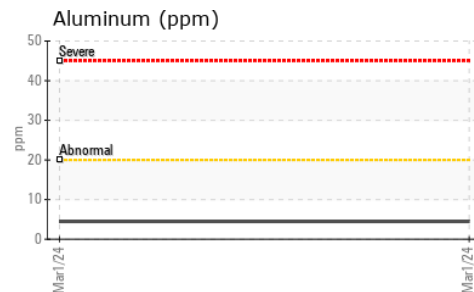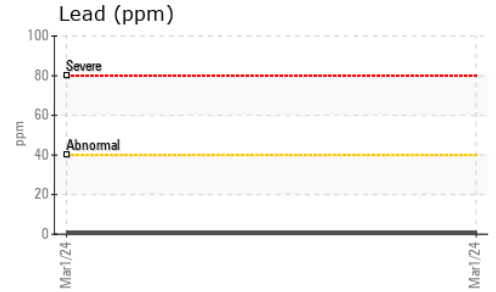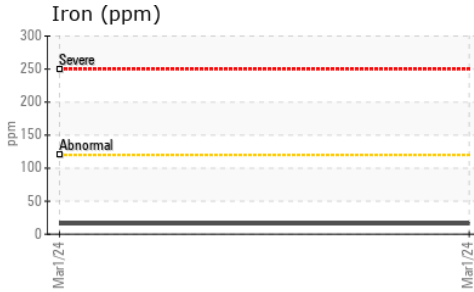

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0081622 **Received** : 04 Mar 2024
Lab Number : 02619770 **Tested** : 04 Mar 2024
Unique Number : 5736880 **Diagnosed** : 04 Mar 2024 - Kevin Marson
Test Package : MOB 1

GFL Environmental - 774
 169 Route 117
 Mont-Tremblant, QC
 CA J8E 1A1
 Contact: Stephane Filteau
 sfilteau@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: