




OIL ANALYSIS REPORT

Sample Rating Trend

FUEL



Area
[1232234]
 Machine Id
828010
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

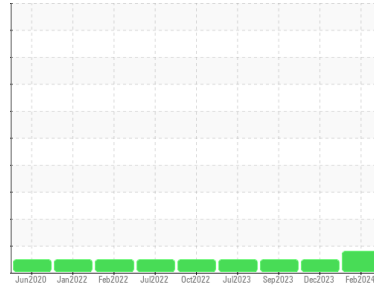

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0093950	GFL0093942	GFL0093934
Sample Date	Client Info	27 Feb 2024	04 Dec 2023	13 Sep 2023
Machine Age	hrs	11657	11175	16627
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		MARGINAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >80	17	15	14
Chromium	ppm ASTM D5185(m) >5	<1	<1	<1
Nickel	ppm ASTM D5185(m) >2	<1	<1	<1
Titanium	ppm ASTM D5185(m)	0	0	0
Silver	ppm ASTM D5185(m) >3	0	<1	0
Aluminum	ppm ASTM D5185(m) >30	3	3	3
Lead	ppm ASTM D5185(m) >30	<1	<1	<1
Copper	ppm ASTM D5185(m) >150	<1	1	1
Tin	ppm ASTM D5185(m) >5	0	0	0
Antimony	ppm ASTM D5185(m)	0	0	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 0	6	5	5
Barium	ppm ASTM D5185(m) 0	0	<1	0
Molybdenum	ppm ASTM D5185(m) 60	55	57	57
Manganese	ppm ASTM D5185(m) 0	0	0	<1
Magnesium	ppm ASTM D5185(m) 1010	869	903	932
Calcium	ppm ASTM D5185(m) 1070	1065	1098	1055
Phosphorus	ppm ASTM D5185(m) 1150	924	920	1017
Zinc	ppm ASTM D5185(m) 1270	1101	1139	1164
Sulfur	ppm ASTM D5185(m) 2060	2465	2370	2448
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS



method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >20	5	7	4
Sodium	ppm ASTM D5185(m)	6	7	7
Potassium	ppm ASTM D5185(m) >20	2	2	3
Fuel	% ASTM D7593* >5	▲ 3.5	<1.0	<1.0

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	0.2	0.3	0.1
Nitration	Abs/cm ASTM D7624* >20	9.0	9.0	7.1
Sulfation	Abs./1mm ASTM D7415* >30	19.5	19.2	19.2



OIL ANALYSIS REPORT








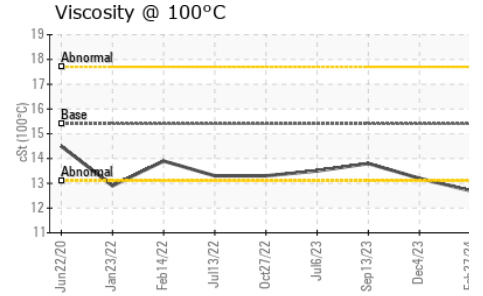
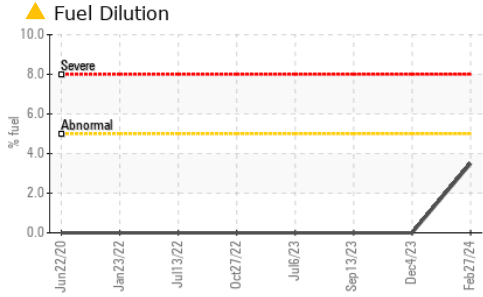


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	16.3	15.8	15.0

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	12.7	13.2	13.8

GRAPHS

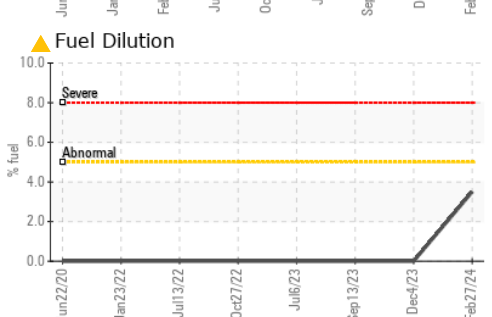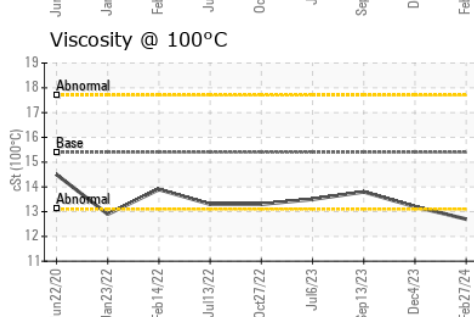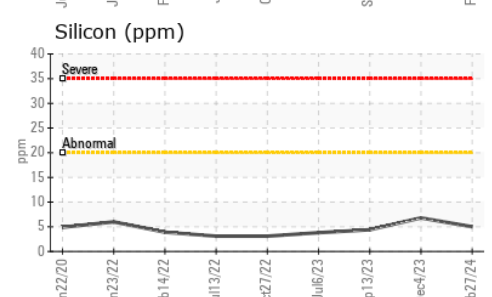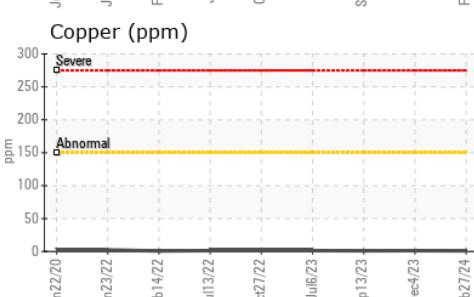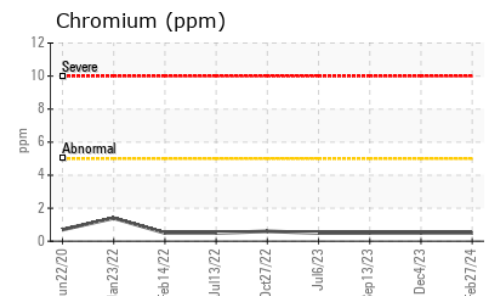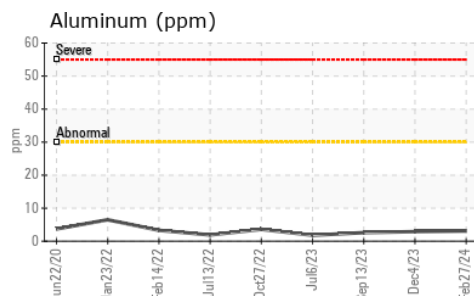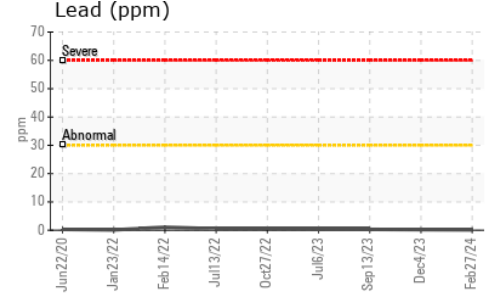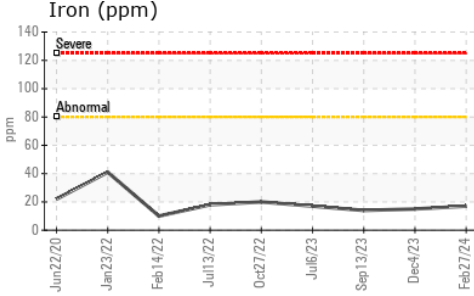

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0093950
Lab Number : 02619819
Unique Number : 5736929
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel)
Received : 05 Mar 2024
Tested : 06 Mar 2024
Diagnosed : 06 Mar 2024 - Wes Davis

GFL Environmental - 777 - Belleville-Municipal waste
 197 Putman Industrial Road
 Belleville, ON
 CA K8N 4Z6
 Contact: Andrea Michael
 amichael@gflenv.com
 T: (613)962-7144
 F: (613)962-1994

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.