




# OIL ANALYSIS REPORT

## Sample Rating Trend

## VISCOSITY

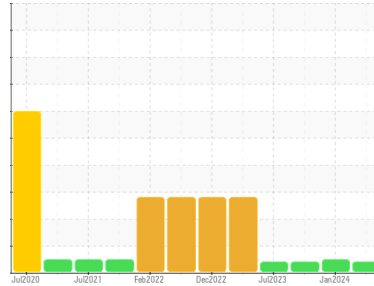

Machine Id  
**925005**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

#### Fluid Condition

Viscosity of sample indicates oil is within SAE 30 range, advise investigate. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The condition of the oil is acceptable for the time in service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0113256</b>	GFL0102857	GFL0090849
Sample Date	Client Info	<b>29 Feb 2024</b>	18 Jan 2024	12 Sep 2023
Machine Age	kms	<b>23332</b>	23071	22501
Oil Age	kms	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>ABNORMAL</b>	NORMAL	ABNORMAL

### CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	0.0	NEG

### WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m) >120	<b>5</b>	10	6
Chromium	ppm	ASTM D5185(m) >20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >5	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >20	<b>3</b>	3	2
Lead	ppm	ASTM D5185(m) >40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185(m) >330	<b>1</b>	<1	1
Tin	ppm	ASTM D5185(m) >15	<b>0</b>	<1	0
Antimony	ppm	ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) 0	<b>41</b>	5	27
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 60	<b>40</b>	56	40
Manganese	ppm	ASTM D5185(m) 0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m) 1010	<b>505</b>	871	501
Calcium	ppm	ASTM D5185(m) 1070	<b>1587</b>	1093	1648
Phosphorus	ppm	ASTM D5185(m) 1150	<b>729</b>	930	767
Zinc	ppm	ASTM D5185(m) 1270	<b>837</b>	1102	858
Sulfur	ppm	ASTM D5185(m) 2060	<b>2196</b>	2419	2036
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

### CONTAMINANTS




method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >25	<b>3</b>	4	5
Sodium	ppm	ASTM D5185(m)	<b>2</b>	2	3
Potassium	ppm	ASTM D5185(m) >20	<b>2</b>	22	2
Fuel	%	ASTM D7593* >3.0	<b>1.9</b>	2.1	1.6

### INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844* >4	<b>0.2</b>	0.5	0.3
Nitration	Abs/cm	ASTM D7624* >20	<b>6.9</b>	9.0	7.7
Sulfation	Abs.1mm	ASTM D7415* >30	<b>22.3</b>	20.5	22.7



# OIL ANALYSIS REPORT






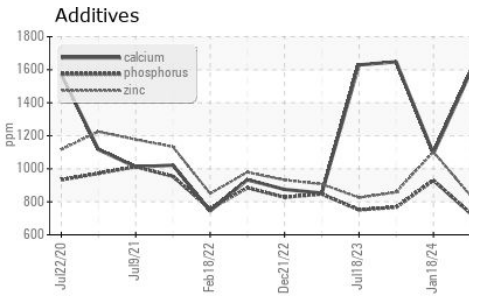
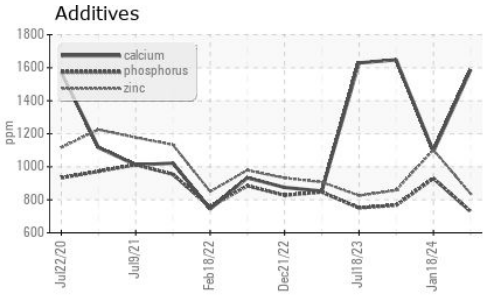
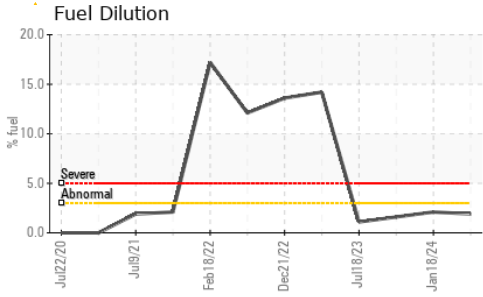


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	19.6	16.3	20.8

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 11.4	13.0	▲ 11.1

## GRAPHS

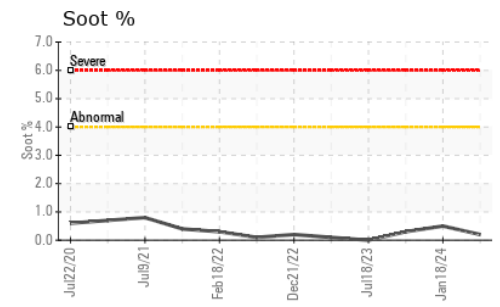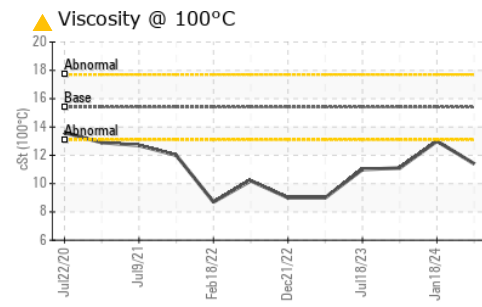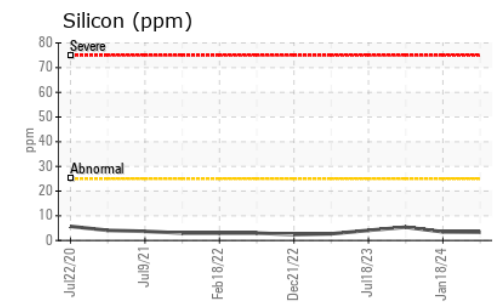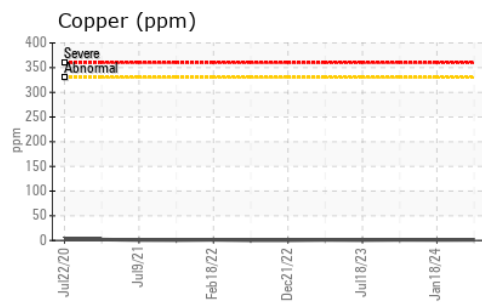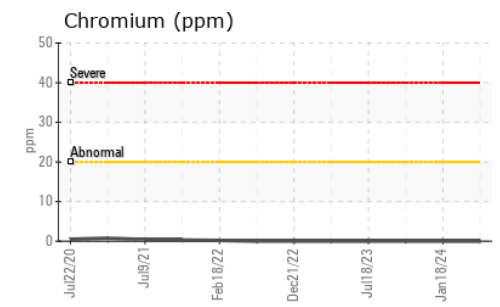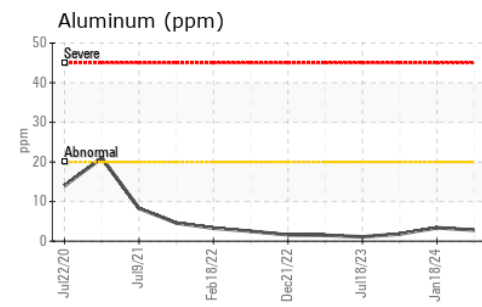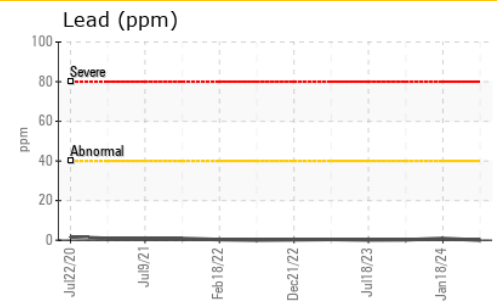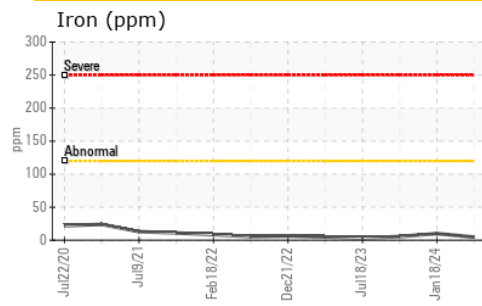

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0113256 **Received** : 05 Mar 2024  
**Lab Number** : 02619833 **Tested** : 06 Mar 2024  
**Unique Number** : 5736943 **Diagnosed** : 06 Mar 2024 - Kevin Marson  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 246 - Windsor**  
 2700 Deziel Dr  
 Windsor, ON  
 CA N8W 5H8  
 Contact: Dave Varga  
 dvarga@gflenv.com  
 T: (519)944-8009  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.