




Machine Id
PIERCE 320216

Component
Front Diesel Engine

Fluid
SAFETY-KLEEN PERFORMANCE PLUS 15W40 (34 LTR)

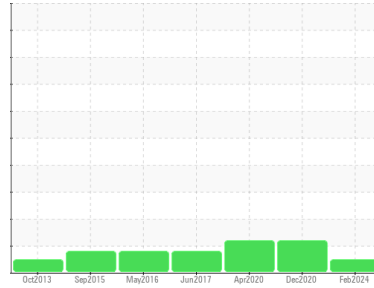

DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PC0078181	PC0028992	PC0029040
Sample Date	Client Info			26 Feb 2024	11 Dec 2020	01 Apr 2020
Machine Age	kms	Client Info		0	41556	41143
Oil Age	kms	Client Info		0	0	0
Oil Changed	Client Info			Changed	N/A	Not Changd
Sample Status				NORMAL	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	▲ 2.8	▲ 2	
Water	WC Method	>0.2	NEG	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG	NEG




WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	2	7	6
Chromium	ppm	ASTM D5185(m)	>20	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	0	0
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	1	1	1
Lead	ppm	ASTM D5185(m)	>40	<1	1	<1
Copper	ppm	ASTM D5185(m)	>330	2	3	2
Tin	ppm	ASTM D5185(m)	>15	0	<1	0
Antimony	ppm	ASTM D5185(m)		0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	1.4	2	3	3
Barium	ppm	ASTM D5185(m)	0.1	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	0.1	57	54	58
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)	2.7	923	858	929
Calcium	ppm	ASTM D5185(m)	2328	1016	1031	1083
Phosphorus	ppm	ASTM D5185(m)	924	1004	971	1031
Zinc	ppm	ASTM D5185(m)	1004	1154	1178	1202
Sulfur	ppm	ASTM D5185(m)	3828	2752	2709	2744
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	2	3	3
Sodium	ppm	ASTM D5185(m)		1	1	0
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0	0.3	0.2
Nitration	Abs/cm	ASTM D7624*	>20	5.7	7.0	7.2
Sulfation	Abs./1mm	ASTM D7415*	>30	18.0	18.3	22.1

OIL ANALYSIS REPORT






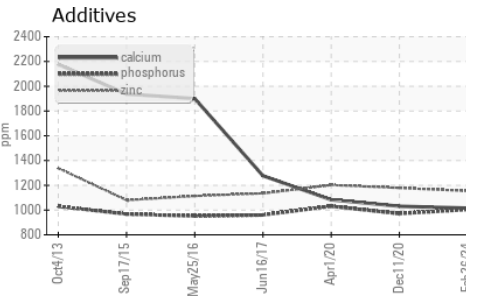
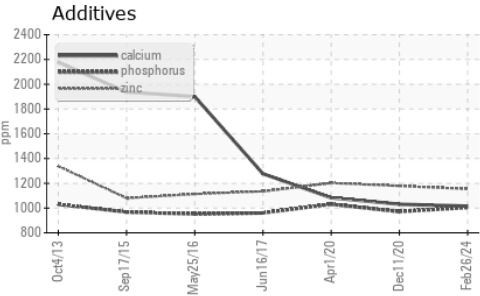
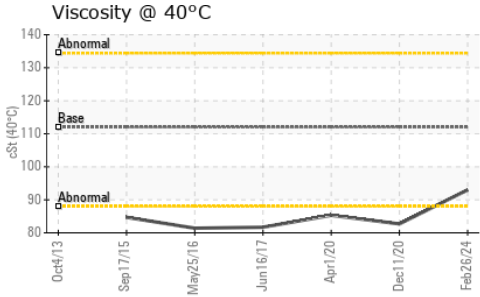


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	14.4	14.1	13.7

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	112	93.0	▲ 82.7	▲ 85.3
Visc @ 100°C	cSt	ASTM D7279(m)	15.3	13.2	11.9	12.4
Viscosity Index (VI)	Scale	ASTM D2270*	143	141	137	141

GRAPHS

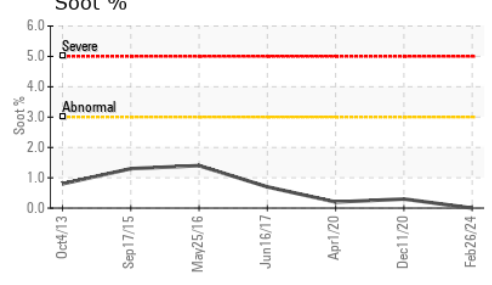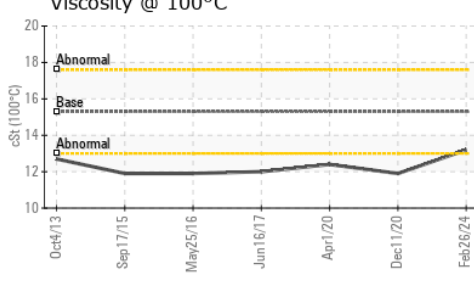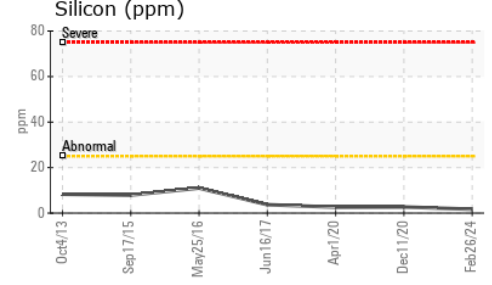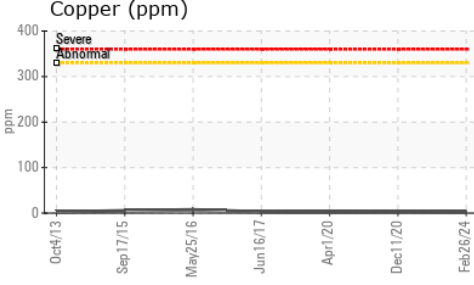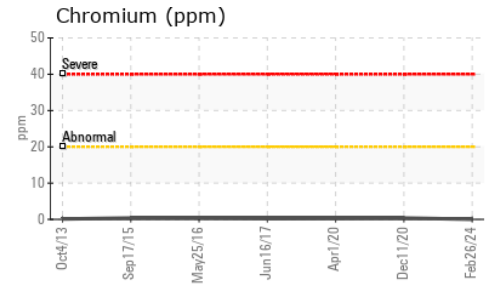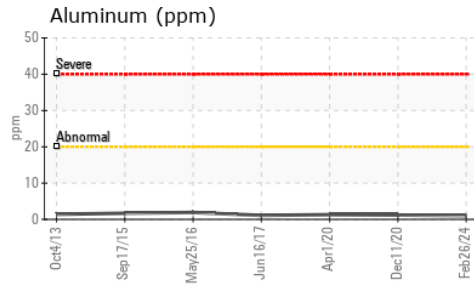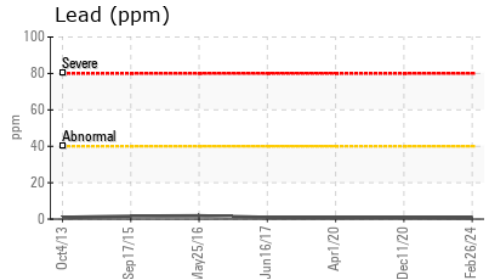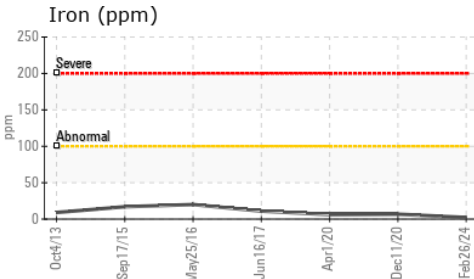

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0078181
Lab Number : 02619899
Unique Number : 5737009
Test Package : MOB 1 (Additional Tests: KV40, VI)

HAMILTON FIRE DEPT
 MECHANICAL DIV., 177 BAY STREET NORTH
 HAMILTON, ON
 CA L8R 2P8
 Contact: Jenny-Lynn Pellegrino
 jenny-lynn.pellegrino@hamilton.ca
 T: (905)546-2424
 F: (905)961-9116

*To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.*