




OIL ANALYSIS REPORT

Sample Rating Trend

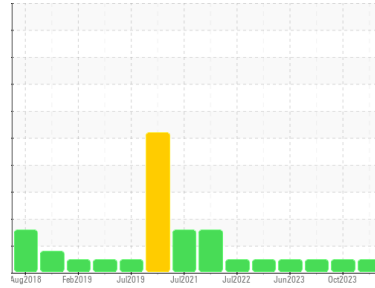

NORMAL



Machine Id
801110

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0102668	GFL0093893	GFL0085967
Sample Date	Client Info		25 Feb 2024	05 Oct 2023	14 Jul 2023
Machine Age	hrs	Client Info	4445	3934	185097
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>80	42	46	29
Chromium	ppm	ASTM D5185(m)	>5	2	2	1
Nickel	ppm	ASTM D5185(m)	>2	<1	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>30	5	3	3
Lead	ppm	ASTM D5185(m)	>30	0	0	0
Copper	ppm	ASTM D5185(m)	>150	2	2	2
Tin	ppm	ASTM D5185(m)	>5	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	3	9	1
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	50	59	62	57
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	950	958	932	962
Calcium	ppm	ASTM D5185(m)	1050	1070	1076	1009
Phosphorus	ppm	ASTM D5185(m)	995	993	977	1027
Zinc	ppm	ASTM D5185(m)	1180	1178	1168	1173
Sulfur	ppm	ASTM D5185(m)	2600	2477	2312	2340
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>20	19	9	4
Sodium	ppm	ASTM D5185(m)		7	8	7
Potassium	ppm	ASTM D5185(m)	>20	2	<1	<1

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0.8	1	0.6
Nitration	Abs/cm	ASTM D7624*	>20	9.8	9.7	8.7
Sulfation	Abs.1mm	ASTM D7415*	>30	21.0	22.6	21.1

