



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Area
(L953428)
Machine Id
926073
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (38 LTR)

DIAGNOSIS

Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Wear

Les taux de métaux sont typiques pour la période de rodage d'un nouveau composant.

Contamination

Il n'y a aucun indice de contamination dans l'huile.

Fluid Condition

L'état de l'huile est acceptable pour la durée de service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0081625	---	---
Sample Date	Client Info		06 Mar 2024	---	---
Machine Age	kms	Client Info	3569	---	---
Oil Age	kms	Client Info	600	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >120	12	---	---
Chromium	ppm	ASTM D5185(m) >20	0	---	---
Nickel	ppm	ASTM D5185(m) >5	<1	---	---
Titanium	ppm	ASTM D5185(m) >2	0	---	---
Silver	ppm	ASTM D5185(m) >2	0	---	---
Aluminum	ppm	ASTM D5185(m) >20	4	---	---
Lead	ppm	ASTM D5185(m) >40	<1	---	---
Copper	ppm	ASTM D5185(m) >330	<1	---	---
Tin	ppm	ASTM D5185(m) >15	<1	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 2	2	---	---
Barium	ppm	ASTM D5185(m) 0	0	---	---
Molybdenum	ppm	ASTM D5185(m) 50	57	---	---
Manganese	ppm	ASTM D5185(m) 0	0	---	---
Magnesium	ppm	ASTM D5185(m) 950	955	---	---
Calcium	ppm	ASTM D5185(m) 1050	1075	---	---
Phosphorus	ppm	ASTM D5185(m) 995	996	---	---
Zinc	ppm	ASTM D5185(m) 1180	1167	---	---
Sulfur	ppm	ASTM D5185(m) 2600	2569	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	12	---	---
Sodium	ppm	ASTM D5185(m)	4	---	---
Potassium	ppm	ASTM D5185(m) >20	2	---	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >4	0	---	---
Nitration	Abs/cm	ASTM D7624* >20	7.8	---	---
Sulfation	Abs./1mm	ASTM D7415* >30	19.1	---	---



OIL ANALYSIS REPORT

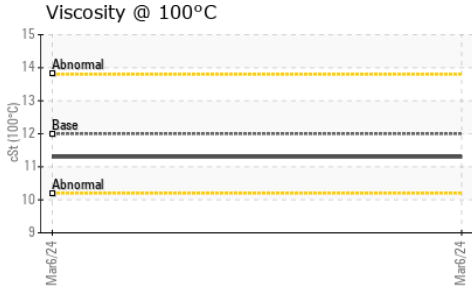


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	15.8	---	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.3	---	---

GRAPHS

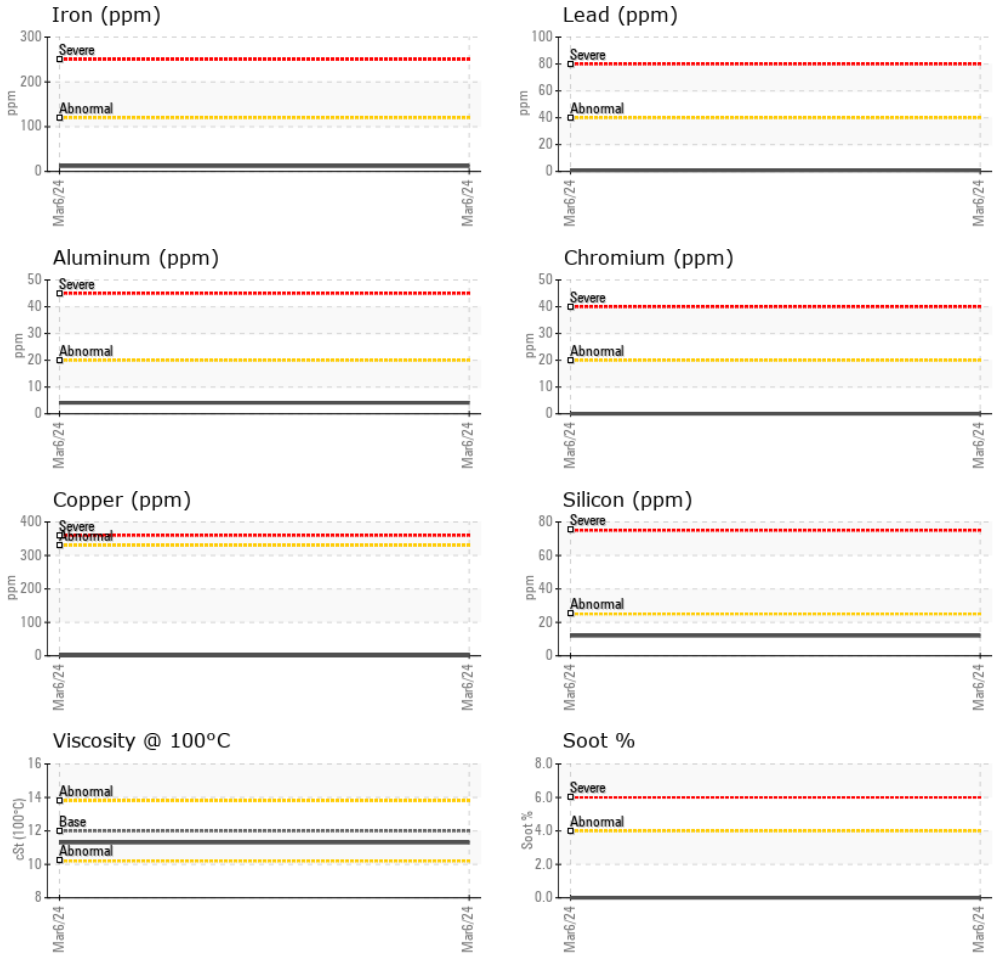

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0081625 **Received** : 07 Mar 2024
Lab Number : **02620476** **Tested** : 07 Mar 2024
Unique Number : 5737586 **Diagnosed** : 07 Mar 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

GFL Environmental - 774
 169 Route 117
 Mont-Tremblant, QC
 CA J8E 1A1
 Contact: Stephane Filteau
 sfilteau@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: