



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**228083**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (29 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0099519</b>	---	---
Sample Date	Client Info		<b>05 Mar 2024</b>	---	---
Machine Age	kms	Client Info	<b>606822</b>	---	---
Oil Age	kms	Client Info	<b>10000</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >150	<b>10</b>	---	---
Chromium	ppm	ASTM D5185(m) >15	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m) >4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m) >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >15	<b>2</b>	---	---
Lead	ppm	ASTM D5185(m) >70	<b>2</b>	---	---
Copper	ppm	ASTM D5185(m) >175	<b>1</b>	---	---
Tin	ppm	ASTM D5185(m) >5	<b>&lt;1</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<b>4</b>	---	---
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 60	<b>60</b>	---	---
Manganese	ppm	ASTM D5185(m) 0	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m) 1010	<b>982</b>	---	---
Calcium	ppm	ASTM D5185(m) 1070	<b>1064</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 1150	<b>1017</b>	---	---
Zinc	ppm	ASTM D5185(m) 1270	<b>1183</b>	---	---
Sulfur	ppm	ASTM D5185(m) 2060	<b>2755</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>2</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>2</b>	---	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624* >20	<b>6.0</b>	---	---
Sulfation	Abs./1mm	ASTM D7415* >30	<b>18.7</b>	---	---



# OIL ANALYSIS REPORT

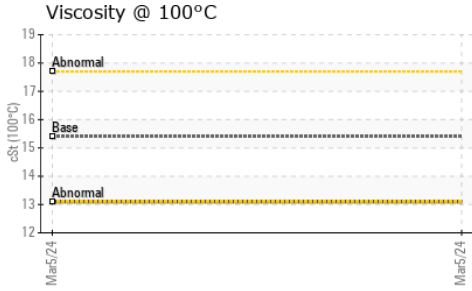

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs./1mm ASTM D7414*	>25	14.7	---


### VISUAL

method	limit/base	current	history1	history2
Emulsified Water	scalar Visual*	>0.2	NEG	---
Free Water	scalar Visual*		NEG	---

### FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D7279(m)	15.4	13.1	---

### GRAPHS

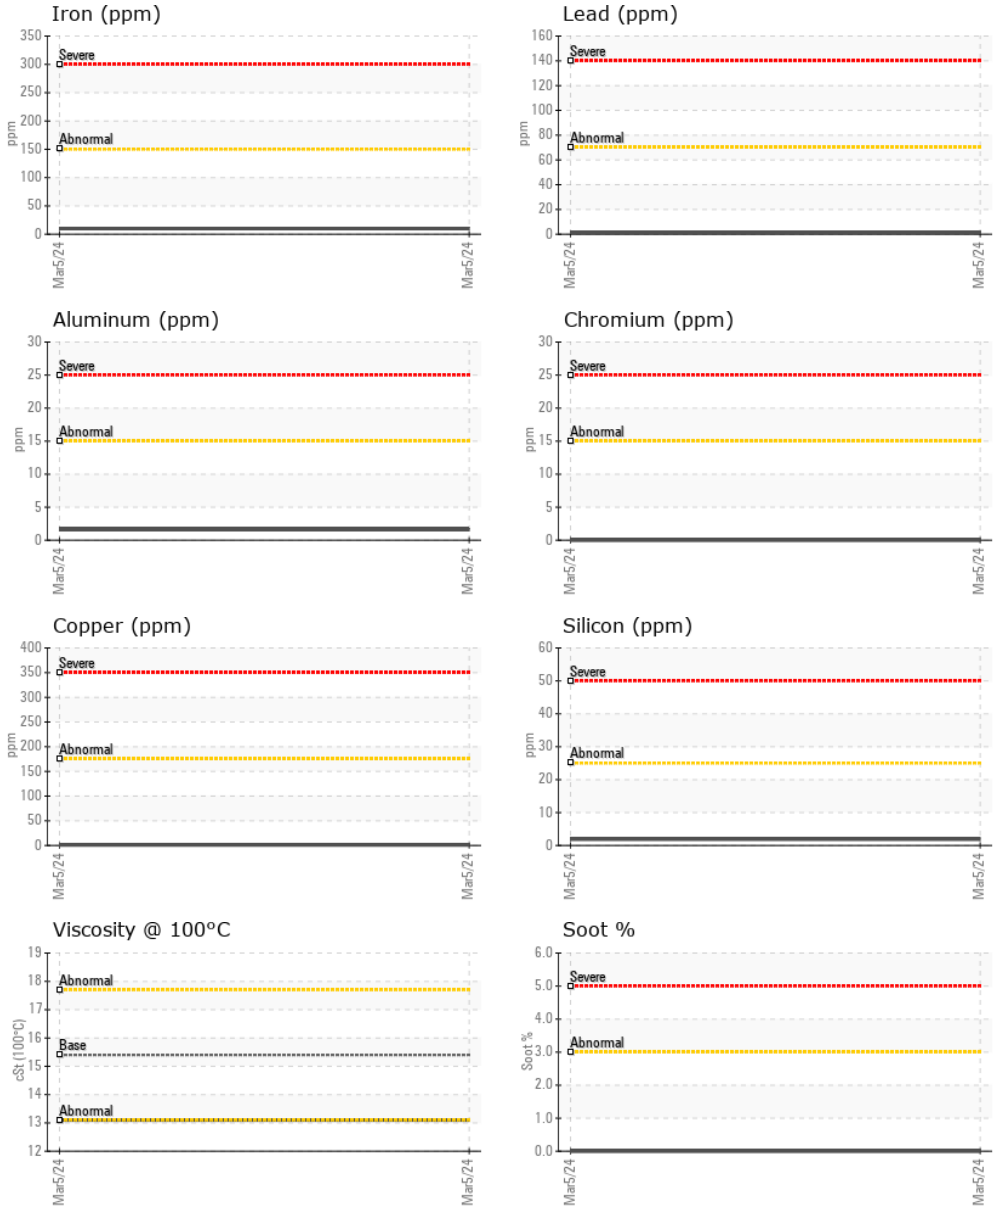

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0099519      **Received** : 11 Mar 2024  
**Lab Number** : 02621040      **Tested** : 11 Mar 2024  
**Unique Number** : 5746159      **Diagnosed** : 11 Mar 2024 - Wes Davis  
**Test Package** : MOB 1

**GFL Environmental - 522**  
 175 MacAlpine Crescent  
 Fort McMurray, AB  
 CA T9H 4A5  
 Contact: Brad Poole  
 bradley.poole@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.