




# OIL ANALYSIS REPORT

Sample Rating Trend

FUEL



Machine Id  
**701026**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (25 LTR)**

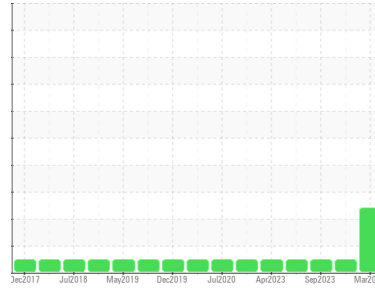

## DIAGNOSIS

### ▲ Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### ▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0111720</b>	GFL0091070	GFL0094206
Sample Date	Client Info	<b>08 Mar 2024</b>	01 Dec 2023	19 Sep 2023
Machine Age	hrs	<b>13226</b>	12690	8185
Oil Age	hrs	<b>0</b>	431	0
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>SEVERE</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >80	<b>5</b>	11	10
Chromium	ppm ASTM D5185(m) >5	<b>0</b>	<1	<1
Nickel	ppm ASTM D5185(m) >2	<b>0</b>	<1	0
Titanium	ppm ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm ASTM D5185(m) >3	<b>0</b>	<1	<1
Aluminum	ppm ASTM D5185(m) >30	<b>2</b>	2	2
Lead	ppm ASTM D5185(m) >30	<b>&lt;1</b>	<1	<1
Copper	ppm ASTM D5185(m) >150	<b>&lt;1</b>	1	<1
Tin	ppm ASTM D5185(m) >5	<b>0</b>	0	0
Antimony	ppm ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 0	<b>7</b>	4	6
Barium	ppm ASTM D5185(m) 0	<b>0</b>	<1	0
Molybdenum	ppm ASTM D5185(m) 60	<b>50</b>	58	58
Manganese	ppm ASTM D5185(m) 0	<b>0</b>	0	<1
Magnesium	ppm ASTM D5185(m) 1010	<b>811</b>	919	939
Calcium	ppm ASTM D5185(m) 1070	<b>906</b>	1020	1034
Phosphorus	ppm ASTM D5185(m) 1150	<b>890</b>	944	1029
Zinc	ppm ASTM D5185(m) 1270	<b>1011</b>	1170	1158
Sulfur	ppm ASTM D5185(m) 2060	<b>2398</b>	2419	2527
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS



method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >20	<b>3</b>	4	4
Sodium	ppm ASTM D5185(m)	<b>3</b>	6	5
Potassium	ppm ASTM D5185(m) >20	<b>1</b>	<1	2
Fuel	% ASTM D7593* >5	<b>▲ 11.7</b>	<1.0	<1.0

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	<b>0.1</b>	0.2	0.2
Nitration	Abs/cm ASTM D7624* >20	<b>7.5</b>	8.8	7.3
Sulfation	Abs./1mm ASTM D7415* >30	<b>18.7</b>	19.1	18.5



# OIL ANALYSIS REPORT







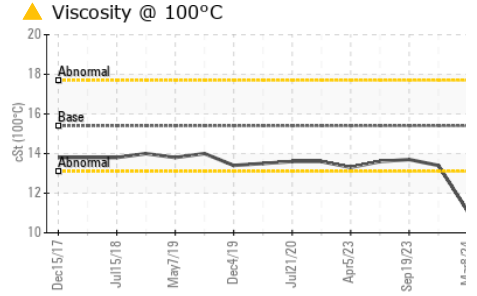
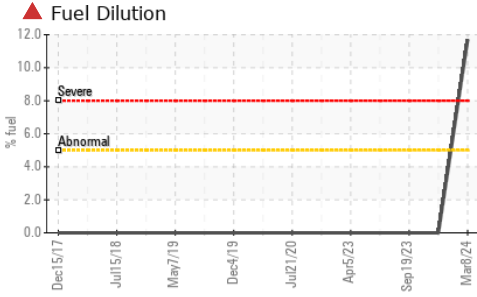


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>14.8</b>	15.9	14.2

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>▲ 11.1</b>	13.4	13.7

## GRAPHS

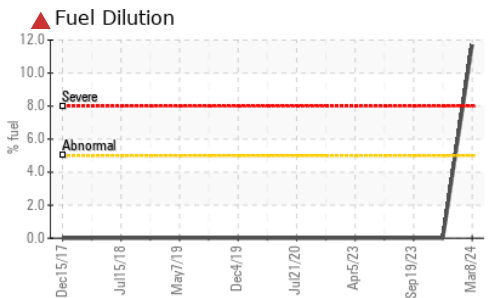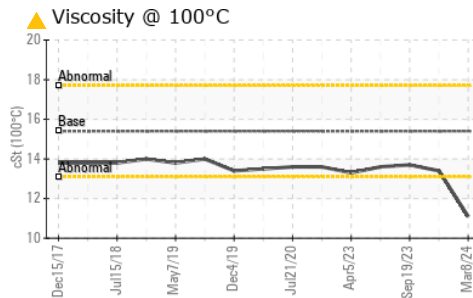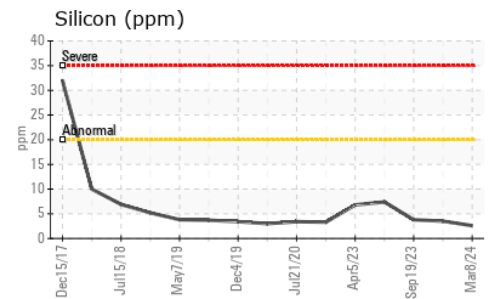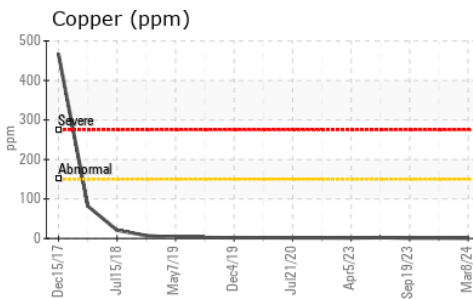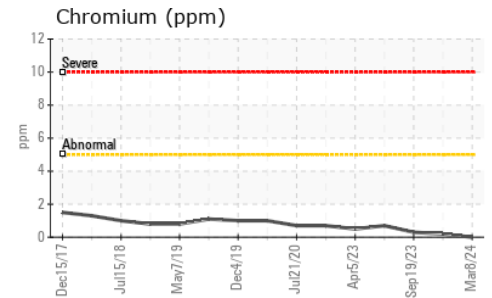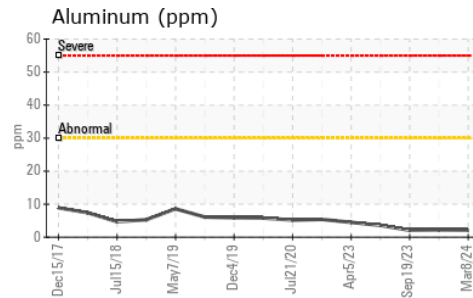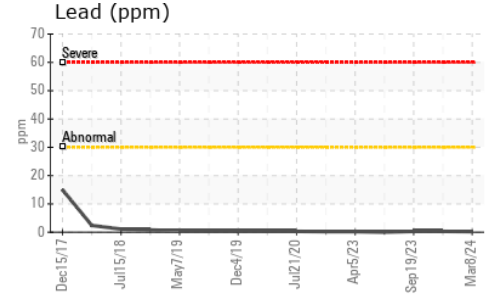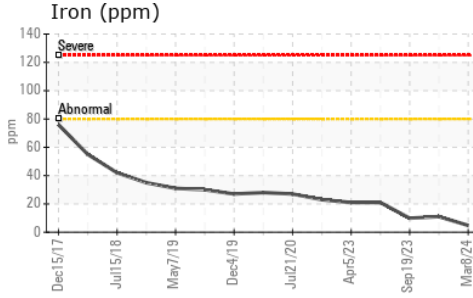

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0111720 **Received** : 12 Mar 2024  
**Lab Number** : **02621316** **Tested** : 13 Mar 2024  
**Unique Number** : 5746435 **Diagnosed** : 13 Mar 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 217 - Aurora**  
 14131 BAYVIEW AVE, AURORA YARD  
 AURORA, ON  
 CA L4G 0K6  
 Contact: Mike Havens  
 MHavens@gflenv.com  
 T:  
 F: (905)713-2445

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.