


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

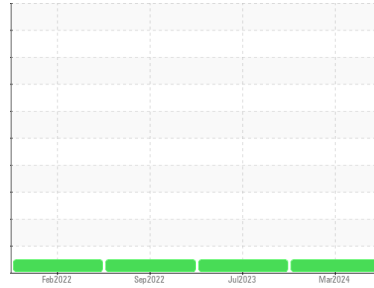

Machine Id  
**PD874**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA SUPREME SYNTHETIC 5W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0082221</b>	PC0078557	PC0064799
Sample Date	Client Info			<b>06 Mar 2024</b>	17 Jul 2023	30 Sep 2022
Machine Age	hrs	Client Info		<b>6101</b>	0	5708
Oil Age	hrs	Client Info		<b>0</b>	0	250
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>4</b>	2	3
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>15	<b>2</b>	<1	1
Lead	ppm	ASTM D5185(m)	>30	<b>1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>125	<b>4</b>	2	2
Tin	ppm	ASTM D5185(m)	>5	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	190	<b>36</b>	42	46
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	79	<b>56</b>	54	56
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	564	<b>1079</b>	1093	1089
Calcium	ppm	ASTM D5185(m)	993	<b>869</b>	791	816
Phosphorus	ppm	ASTM D5185(m)	763	<b>1033</b>	1045	1086
Zinc	ppm	ASTM D5185(m)	835	<b>1184</b>	1148	1189
Sulfur	ppm	ASTM D5185(m)	2536	<b>2971</b>	2784	2838
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>60	<b>2</b>	2	4
Sodium	ppm	ASTM D5185(m)		<b>7</b>	8	10
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	<1	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.3</b>	7.5	8.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>20.6</b>	20.1	20.3

# OIL ANALYSIS REPORT







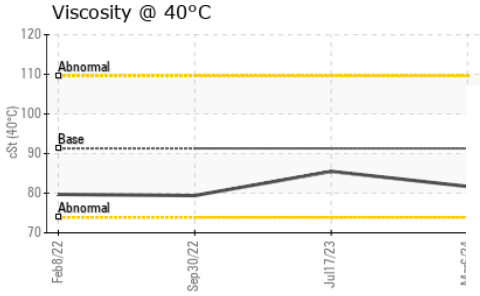
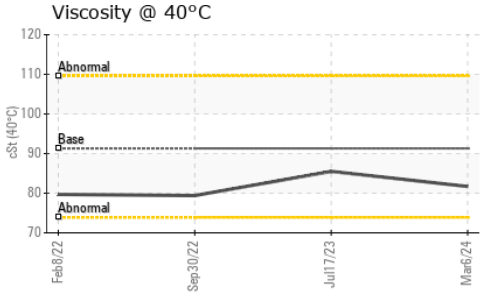


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>19.9</b>	17.8	18.7

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	91.3	<b>81.7</b>	85.5	79.4
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	<b>13.3</b>	14.1	12.9
Viscosity Index (VI)	Scale	ASTM D2270*	170	<b>165</b>	170	163

## GRAPHS

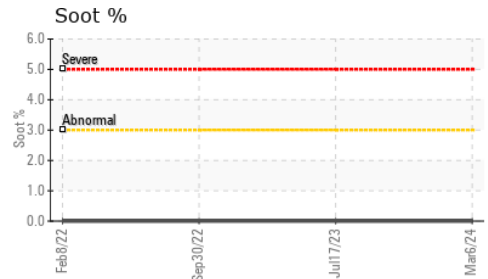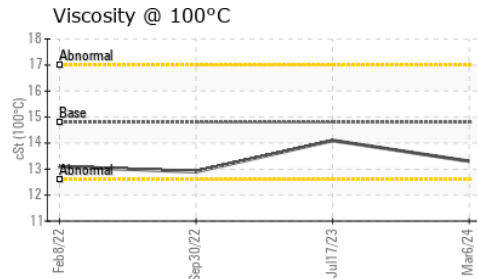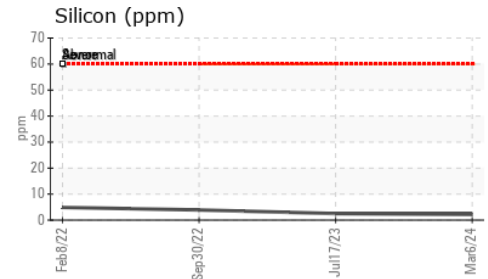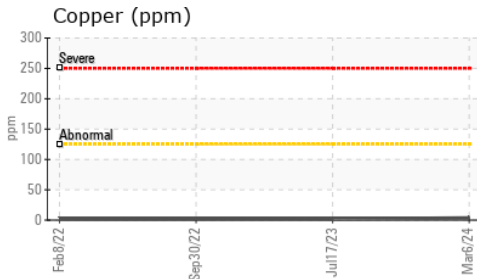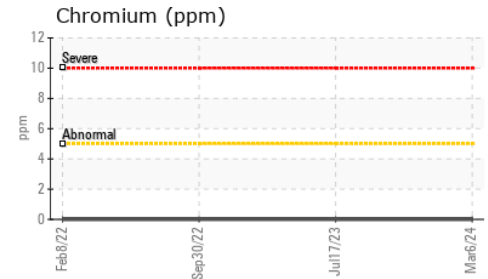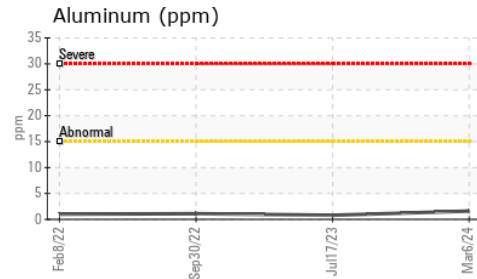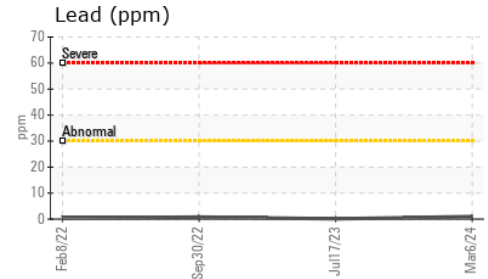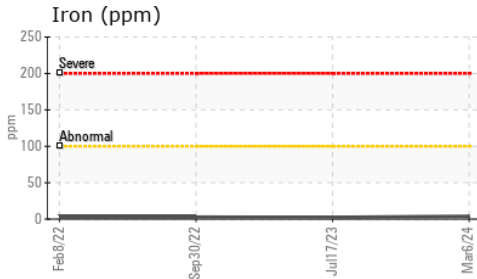

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0082221  
**Lab Number** : 02621403  
**Unique Number** : 5746522  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI )

Green Infrastructure and Partners Inc (GPI) - 286 - Shoring & Foundations  
 151 Ram Forest Rd,  
 Stouffville, ON  
 CA L4A 2G8  
 Contact: Bill Acton  
 bacton@gipi.com

*To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.*

T:  
F: