



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**1511057**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0112385</b>	---	---
Sample Date	Client Info		<b>04 Mar 2024</b>	---	---
Machine Age	kms	Client Info	<b>3705</b>	---	---
Oil Age	kms	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	<b>16</b>	---	---
Chromium	ppm	ASTM D5185(m) >20	<b>1</b>	---	---
Nickel	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m) >2	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m) >2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >25	<b>2</b>	---	---
Lead	ppm	ASTM D5185(m) >40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185(m) >330	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m) >15	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 2	<b>6</b>	---	---
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 50	<b>57</b>	---	---
Manganese	ppm	ASTM D5185(m) 0	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m) 950	<b>984</b>	---	---
Calcium	ppm	ASTM D5185(m) 1050	<b>1001</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 995	<b>1031</b>	---	---
Zinc	ppm	ASTM D5185(m) 1180	<b>1189</b>	---	---
Sulfur	ppm	ASTM D5185(m) 2600	<b>2718</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>5</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>2</b>	---	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	<b>0.1</b>	---	---
Nitration	Abs/cm	ASTM D7624* >20	<b>7.6</b>	---	---
Sulfation	Abs./1mm	ASTM D7415* >30	<b>19.2</b>	---	---



# OIL ANALYSIS REPORT







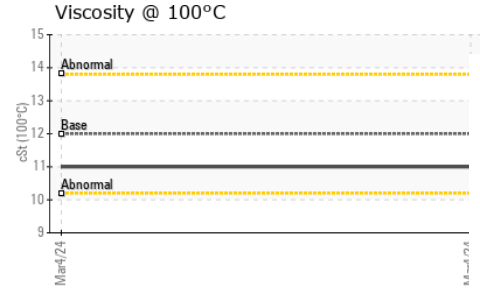
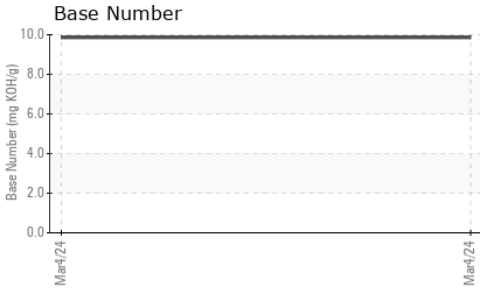


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>16.0</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*		<b>9.86</b>	---	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	<b>11.0</b>	---	---

## GRAPHS

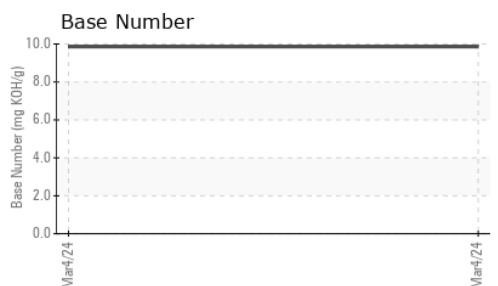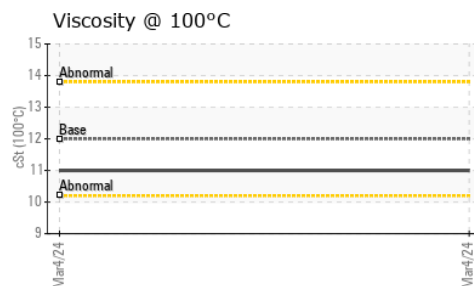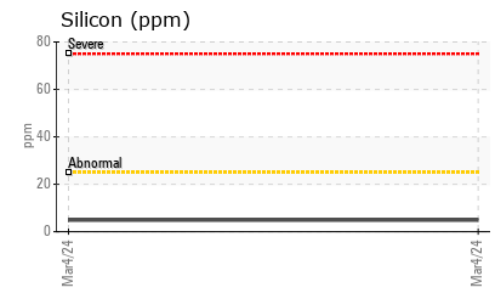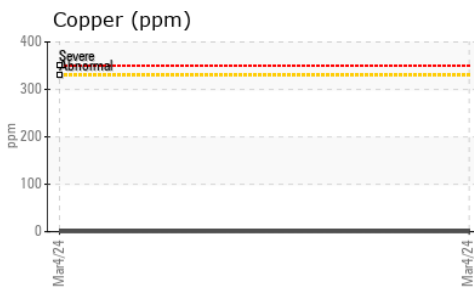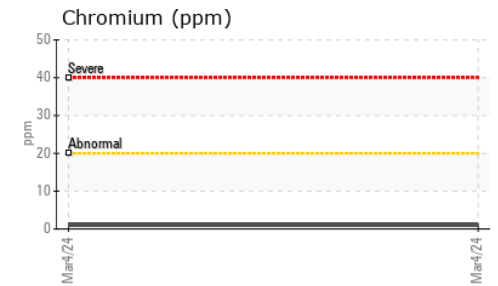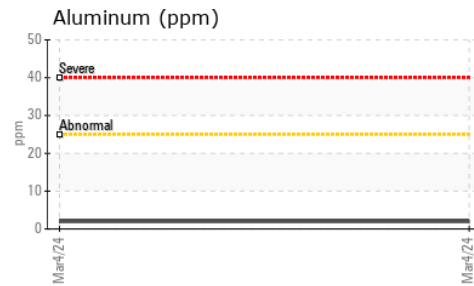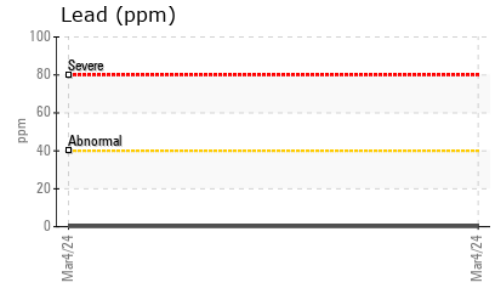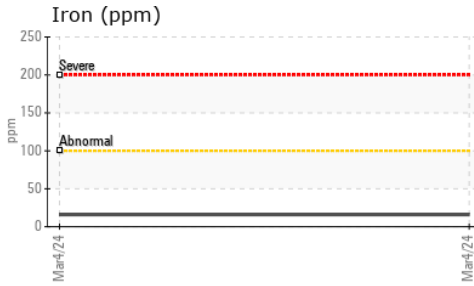

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 550 - Rocky View County**  
**Sample No.** : GFL0112385 **Received** : 12 Mar 2024 220 Carmek Blvd  
**Lab Number** : **02621412** **Tested** : 13 Mar 2024 Rocky View County, AB  
**Unique Number** : 5746531 **Diagnosed** : 13 Mar 2024 - Wes Davis CA T1X 1X1  
**Test Package** : MOB 2 **Contact**: GFL Calgary  
 calgarymaintenance@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
 F: (403)369-6163