




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

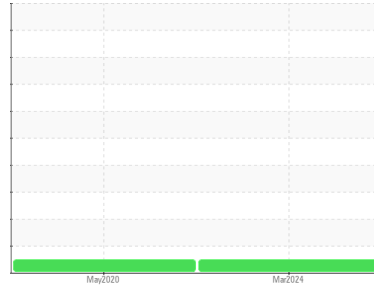

Area
[1237998]
 Machine Id
101064

Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (40 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0107917	GFL0006020	---
Sample Date	Client Info			06 Mar 2024	05 May 2020	---
Machine Age	kms	Client Info		363524	142854	---
Oil Age	kms	Client Info		0	600	---
Oil Changed	Client Info			Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	0.3	---
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	0.0	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>110	24	21	---
Chromium	ppm	ASTM D5185(m)	>4	<1	2	---
Nickel	ppm	ASTM D5185(m)	>2	<1	0	---
Titanium	ppm	ASTM D5185(m)		0	<1	---
Silver	ppm	ASTM D5185(m)	>2	0	<1	---
Aluminum	ppm	ASTM D5185(m)	>25	2	6	---
Lead	ppm	ASTM D5185(m)	>45	6	5	---
Copper	ppm	ASTM D5185(m)	>85	<1	1	---
Tin	ppm	ASTM D5185(m)	>4	<1	<1	---
Antimony	ppm	ASTM D5185(m)		0	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	<1	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	2	1	4	---
Barium	ppm	ASTM D5185(m)	0	0	0	---
Molybdenum	ppm	ASTM D5185(m)	50	73	65	---
Manganese	ppm	ASTM D5185(m)	0	0	<1	---
Magnesium	ppm	ASTM D5185(m)	950	1208	1107	---
Calcium	ppm	ASTM D5185(m)	1050	1310	1172	---
Phosphorus	ppm	ASTM D5185(m)	995	1245	1140	---
Zinc	ppm	ASTM D5185(m)	1180	1484	1387	---
Sulfur	ppm	ASTM D5185(m)	2600	2912	2763	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>30	4	3	---
Sodium	ppm	ASTM D5185(m)		5	5	---
Potassium	ppm	ASTM D5185(m)	>20	2	14	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.4	0.2	---
Nitration	Abs/cm	ASTM D7624*	>20	14.4	12.7	---
Sulfation	Abs./1mm	ASTM D7415*	>30	28.6	27.6	---



OIL ANALYSIS REPORT








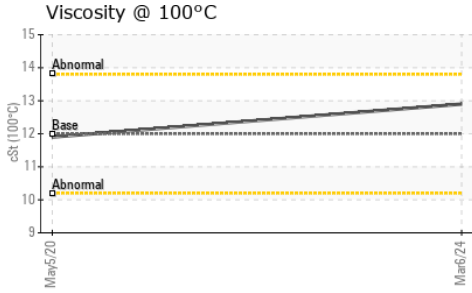


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	28.3	22.0	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	12.9	11.9	---

GRAPHS

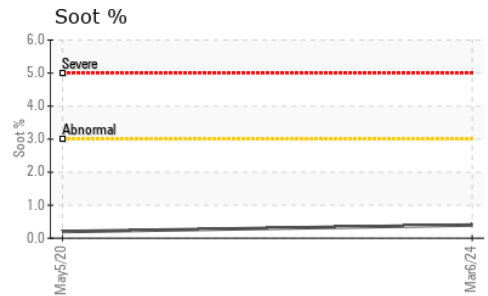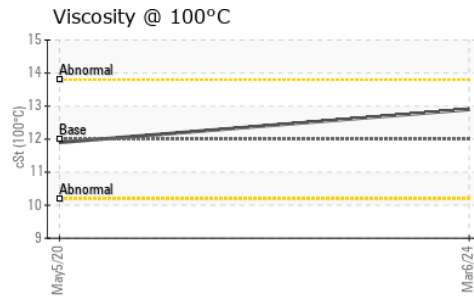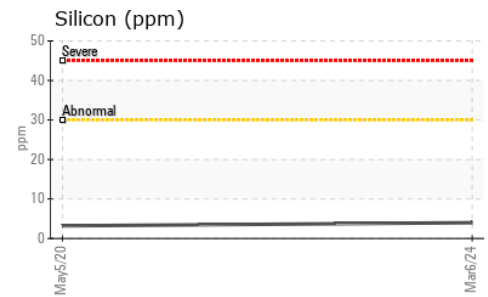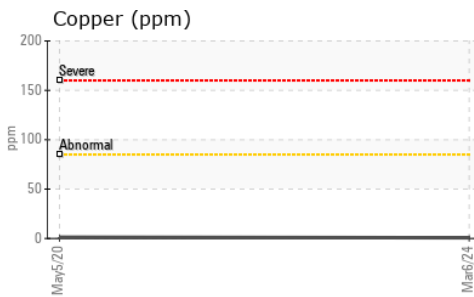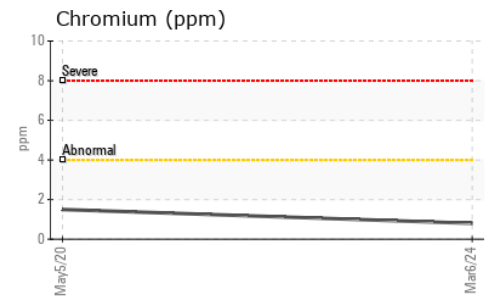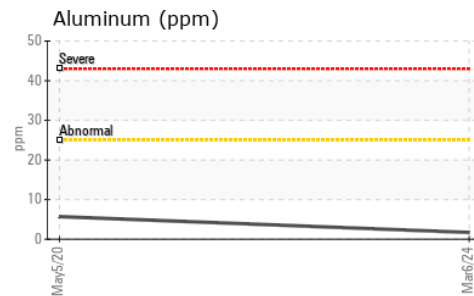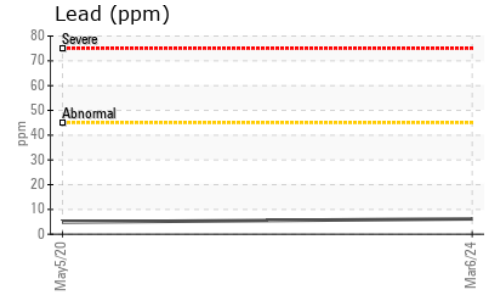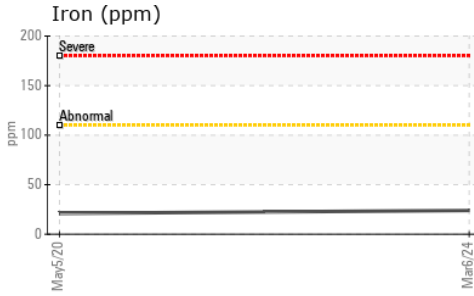

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0107917 **Received** : 13 Mar 2024
Lab Number : **02621654** **Tested** : 13 Mar 2024
Unique Number : 5746773 **Diagnosed** : 13 Mar 2024 - Kevin Marson
Test Package : MOB 1

GFL Environmental - 350 - Emerald Park Regina
 2B Industrial Drive., Great Plains Industrial Park,
 Emerald Park, SK
 CA S4L 1B6
 Contact: Vaughn Hortness
 vhortness@gflenv.com
 T: (877)244-9500
 F: (306)244-9501

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.