




OIL ANALYSIS REPORT

Sample Rating Trend

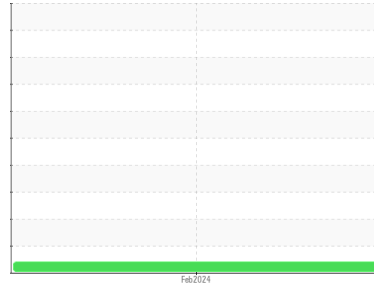

VISCOSITY



Machine Id
TOYOTA FL0517

Component
Gasoline Engine

Fluid
CASTROL EDGE SLX PRO OE 5W30 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

▲ Fluid Condition

Viscosity of sample indicates oil is within SAE 20 range, advise investigate. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0082091	---	---
Sample Date	Client Info		12 Feb 2024	---	---
Machine Age	hrs	Client Info	8378	---	---
Oil Age	hrs	Client Info	500	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >150	27	---	---
Chromium	ppm	ASTM D5185(m) >20	2	---	---
Nickel	ppm	ASTM D5185(m) >5	<1	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m) >2	0	---	---
Aluminum	ppm	ASTM D5185(m) >40	5	---	---
Lead	ppm	ASTM D5185(m) >50	0	---	---
Copper	ppm	ASTM D5185(m) >155	<1	---	---
Tin	ppm	ASTM D5185(m) >10	<1	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	81	---	---
Barium	ppm	ASTM D5185(m)	0	---	---
Molybdenum	ppm	ASTM D5185(m)	77	---	---
Manganese	ppm	ASTM D5185(m)	0	---	---
Magnesium	ppm	ASTM D5185(m)	551	---	---
Calcium	ppm	ASTM D5185(m) 1925	1004	---	---
Phosphorus	ppm	ASTM D5185(m)	744	---	---
Zinc	ppm	ASTM D5185(m) 840	861	---	---
Sulfur	ppm	ASTM D5185(m)	2664	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >30	16	---	---
Sodium	ppm	ASTM D5185(m) >400	3	---	---
Potassium	ppm	ASTM D5185(m) >20	<1	---	---
Fuel	%	ASTM D7593* >4.0	0.3	---	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	0	---	---
Nitration	Abs/cm	ASTM D7624* >20	7.7	---	---
Sulfation	Abs/.1mm	ASTM D7415* >30	20.2	---	---



OIL ANALYSIS REPORT

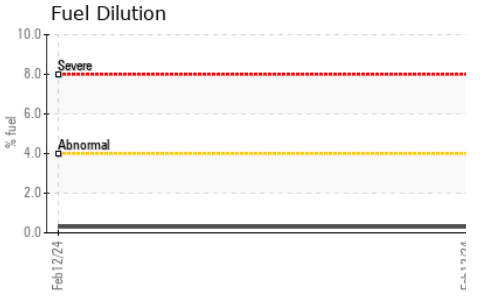

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs./1mm ASTM D7414*	>25	9.0	---	---









VISUAL

method	limit/base	current	history1	history2	
Emulsified Water	scalar Visual*	>0.2	NEG	---	---
Free Water	scalar Visual*		NEG	---	---

FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 100°C	cSt ASTM D7279(m)	12.1	▲ 9.1	---	---

GRAPHS

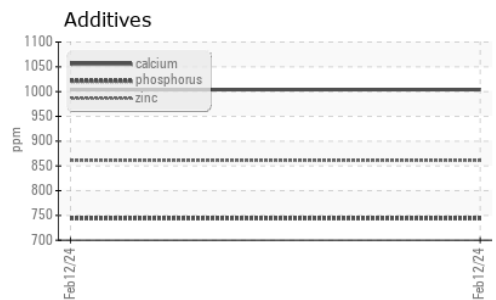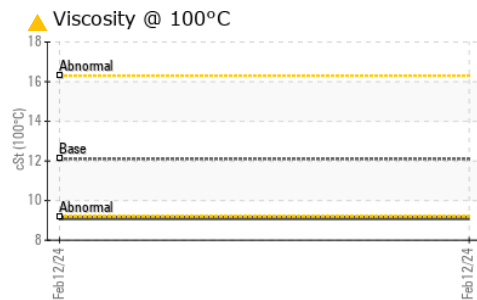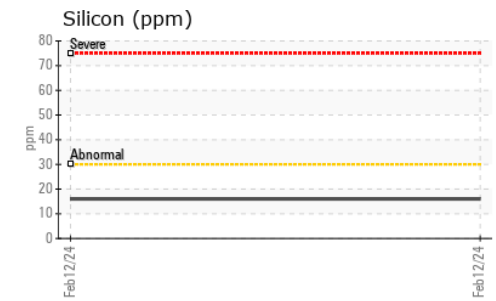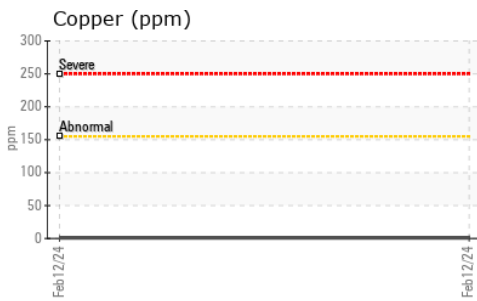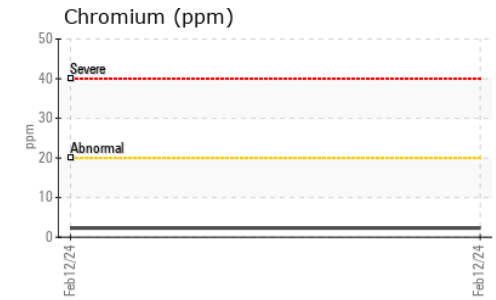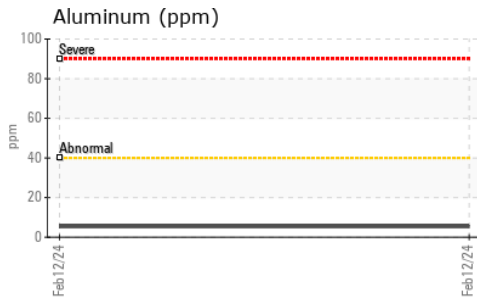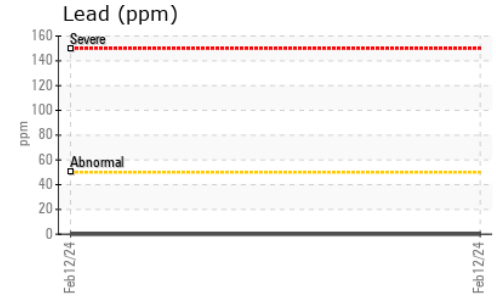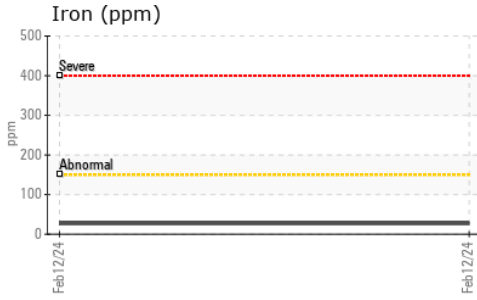

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0082091 **Received** : 13 Mar 2024
Lab Number : 02621668 **Tested** : 14 Mar 2024
Unique Number : 5746787 **Diagnosed** : 14 Mar 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 527
 740 Pine Street South
 Timmins, ON
 CA P4N 8S9
 Contact: Martin St-Pierre
 martinstpierre@gflenv.com
 T: (705)264-8700
 F: (705)264-8701

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.