




OIL ANALYSIS REPORT

Sample Rating Trend

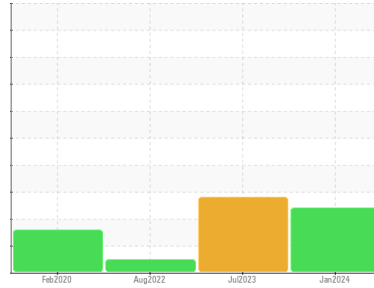

FUEL



Machine Id
INTERNATIONAL 401173

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0107466	GFL0057900	GFL0057920
Sample Date	Client Info	16 Jan 2024	03 Jul 2023	11 Aug 2022
Machine Age	hrs	10054	9318	600
Oil Age	hrs	600	333	600
Oil Changed	Client Info	Changed	N/A	Changed
Sample Status		SEVERE	SEVERE	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >100	41	18	12
Chromium	ppm ASTM D5185(m) >20	2	<1	<1
Nickel	ppm ASTM D5185(m) >4	<1	<1	<1
Titanium	ppm ASTM D5185(m)	0	<1	<1
Silver	ppm ASTM D5185(m) >3	<1	<1	0
Aluminum	ppm ASTM D5185(m) >20	17	9	9
Lead	ppm ASTM D5185(m) >40	2	1	<1
Copper	ppm ASTM D5185(m) >330	3	2	<1
Tin	ppm ASTM D5185(m) >15	<1	<1	<1
Antimony	ppm ASTM D5185(m)	0	0	<1
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 0	4	12	28
Barium	ppm ASTM D5185(m) 0	0	0	0
Molybdenum	ppm ASTM D5185(m) 60	61	51	16
Manganese	ppm ASTM D5185(m) 0	<1	<1	<1
Magnesium	ppm ASTM D5185(m) 1010	926	748	102
Calcium	ppm ASTM D5185(m) 1070	1028	1220	2280
Phosphorus	ppm ASTM D5185(m) 1150	998	992	972
Zinc	ppm ASTM D5185(m) 1270	1145	1068	1019
Sulfur	ppm ASTM D5185(m) 2060	2657	2528	3134
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS



method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	7	4	4
Sodium	ppm ASTM D5185(m)	10	14	5
Potassium	ppm ASTM D5185(m) >20	4	2	<1
Fuel	% ASTM D7593* >2.0	▲ 6.3	▲ 7.4	<1.0

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	1.1	0.5	0.3
Nitration	Abs/cm ASTM D7624* >20	10.8	9.2	6.7
Sulfation	Abs/.1mm ASTM D7415* >30	21.3	19.8	18.2



OIL ANALYSIS REPORT







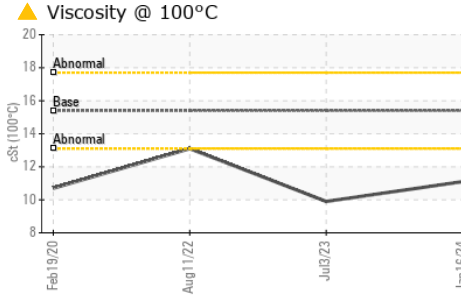
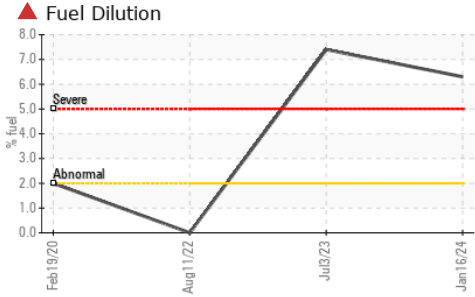


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	18.1	16.5	10.4

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 11.1	▲ 9.9	13.1

GRAPHS

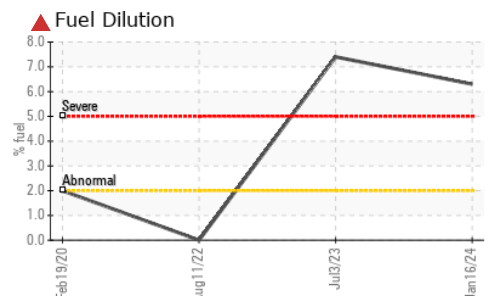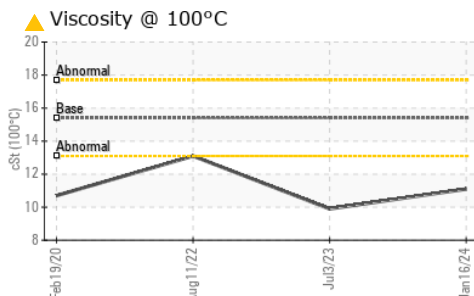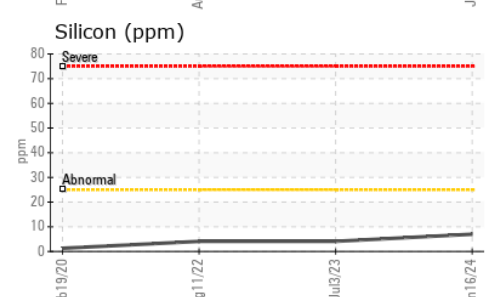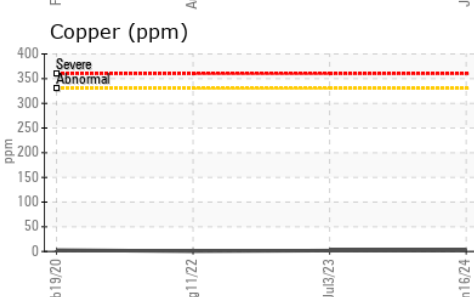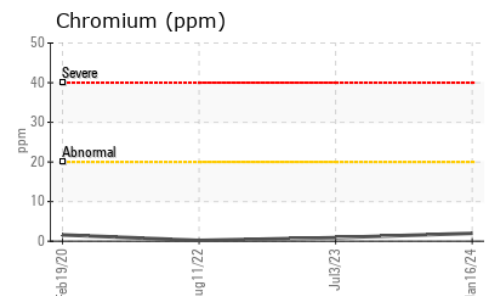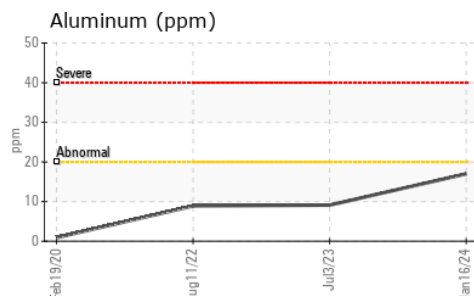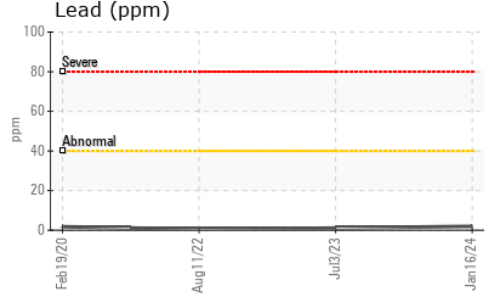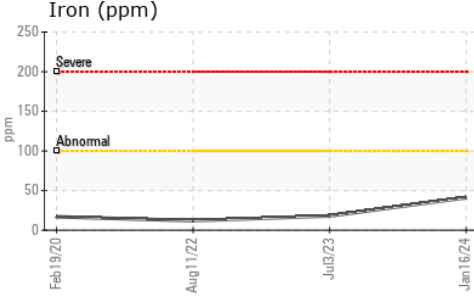

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0107466 **Received** : 13 Mar 2024
Lab Number : **02621704** **Tested** : 14 Mar 2024
Unique Number : 5746823 **Diagnosed** : 14 Mar 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel)

GFL Environmental - 527
 740 Pine Street South
 Timmins, ON
 CA P4N 8S9
 Contact: Martin St-Pierre
 martinstpierre@gflenv.com
 T: (705)264-8700
 F: (705)264-8701

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.