




OIL ANALYSIS REPORT

Sample Rating Trend

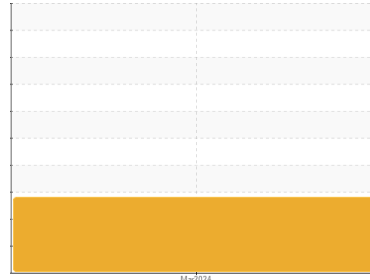

DIRT



Machine Id
414019

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 15W40 (--- LTR)

DIAGNOSIS

▲ Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. We recommend that you drain the oil from the component if this has not already been done. We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

▲ Wear

Nickel ppm levels are abnormal. Exhaust valve wear is indicated. We have assumed that this component is not breaking in (age of component not reported).

▲ Contamination

Fuel content negligible. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is a moderate concentration of dirt present in the oil. High amount of ingressed dirt has caused abrasive wear to the component.

▲ Fluid Condition

Viscosity of sample indicates oil is within SAE 30 range, advise investigate. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0102896	---	---
Sample Date	Client Info	13 Mar 2024	---	---
Machine Age	hrs	Client Info	0	---
Oil Age	hrs	Client Info	0	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---
Glycol	WC Method		NEG	---

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185(m)	>120	55	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>5	▲ 8	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>2	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>20	12	---	---
Lead	ppm	ASTM D5185(m)	>40	7	---	---
Copper	ppm	ASTM D5185(m)	>330	290	---	---
Tin	ppm	ASTM D5185(m)	>15	5	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185(m)	250	175	---	---
Barium	ppm	ASTM D5185(m)	10	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	100	116	---	---
Manganese	ppm	ASTM D5185(m)		4	---	---
Magnesium	ppm	ASTM D5185(m)	450	717	---	---
Calcium	ppm	ASTM D5185(m)	3000	1433	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	685	---	---
Zinc	ppm	ASTM D5185(m)	1350	777	---	---
Sulfur	ppm	ASTM D5185(m)	4250	1952	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185(m)	>25	▲ 71	---	---
Sodium	ppm	ASTM D5185(m)	>158	3	---	---
Potassium	ppm	ASTM D5185(m)	>20	27	---	---
Fuel	%	ASTM D7593*	>3.0	0.7	---	---


INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	ASTM D7844*	>4	0.2	---	---
Nitration	Abs/cm	ASTM D7624*	>20	10.3	---	---
Sulfation	Abs./1mm	ASTM D7415*	>30	24.5	---	---



OIL ANALYSIS REPORT

▲ Ferrous Alloys

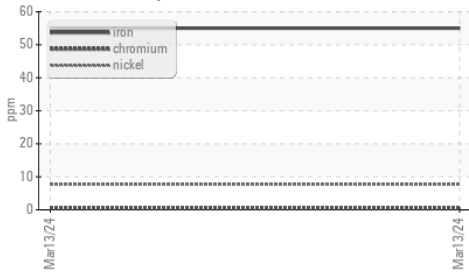

FLUID DEGRADATION method limit/base current history1 history2

Oxidation	Abs./1mm	ASTM D7414*	>25	23.1	---	---
-----------	----------	-------------	-----	-------------	-----	-----

VISUAL method limit/base current history1 history2

Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
------------------	--------	---------	------	------------	-----	-----


Free Water	scalar	Visual*		NEG	---	---
------------	--------	---------	--	------------	-----	-----

FLUID PROPERTIES method limit/base current history1 history2


Visc @ 100°C	cSt	ASTM D7279(m)	14.4	▲ 10.0	---	---
--------------	-----	---------------	------	---------------	-----	-----

GRAPHS

Fuel Dilution

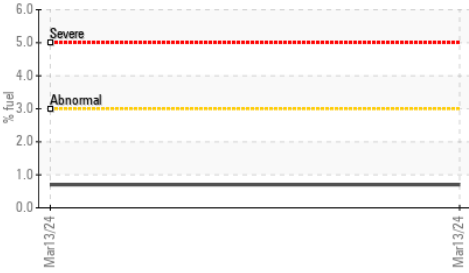


Iron (ppm)

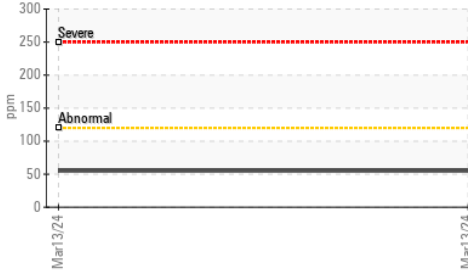

Lead (ppm)




▲ Silicon (ppm)

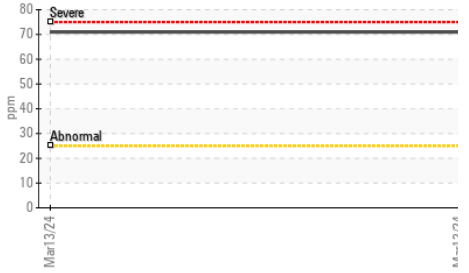


Aluminum (ppm)




Chromium (ppm)

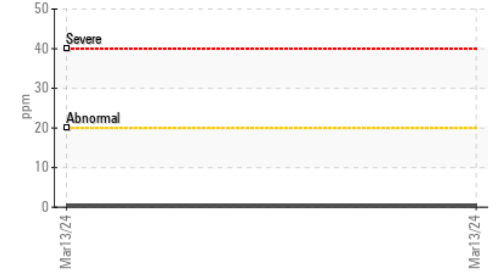


Fuel Dilution

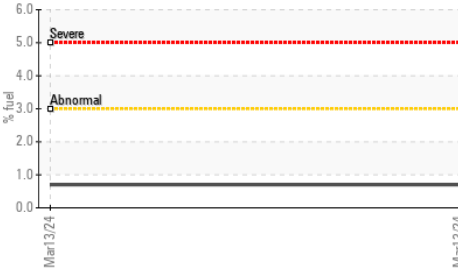


Copper (ppm)

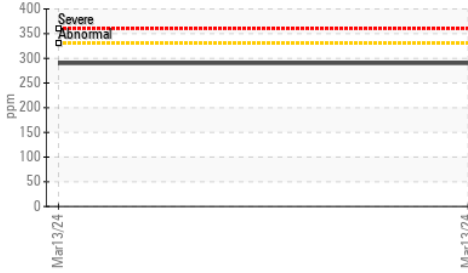

▲ Silicon (ppm)

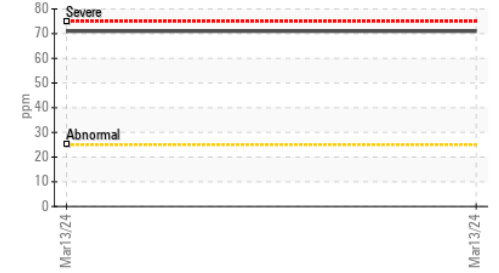

▲ Viscosity @ 100°C

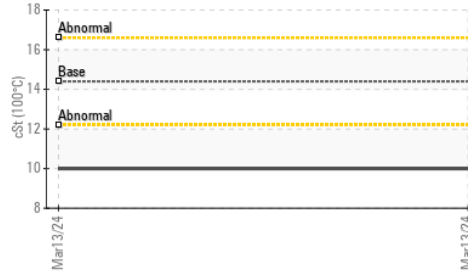

Soot %



ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Sample No. : GFL0102896

Lab Number : 02621954

Unique Number : 5747073

Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel)

Received : 14 Mar 2024

Tested : 15 Mar 2024

Diagnosed : 15 Mar 2024 - Kevin Marson

GFL Environmental - 246 - Windsor

2700 Deziel Dr

Windsor, ON

CA N8W 5H8

Contact: Dave Varga

dvarga@gflenv.com

T: (519)944-8009

F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.