


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

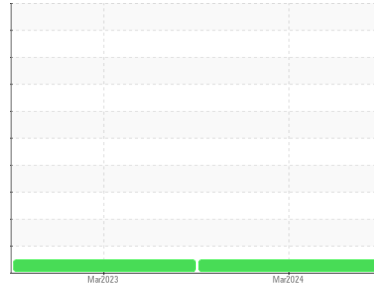

Machine Id  
**NEW HOLLAND T9-700 T9700**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON UHP 5W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PC0081738</b>	PC0064543	---
Sample Date	Client Info			<b>04 Mar 2024</b>	04 Mar 2023	---
Machine Age	hrs	Client Info		<b>1725</b>	1609	---
Oil Age	hrs	Client Info		<b>116</b>	0	---
Oil Changed	Client Info			<b>Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	0.5	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>5</b>	10	---
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Silver	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	<1	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	1	---
Lead	ppm	ASTM D5185(m)	>40	<b>2</b>	7	---
Copper	ppm	ASTM D5185(m)	>330	<b>72</b>	270	---
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	<1	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	65	<b>51</b>	33	---
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185(m)	65	<b>58</b>	63	---
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185(m)	1160	<b>1112</b>	1176	---
Calcium	ppm	ASTM D5185(m)	820	<b>862</b>	996	---
Phosphorus	ppm	ASTM D5185(m)	1160	<b>1034</b>	1139	---
Zinc	ppm	ASTM D5185(m)	1260	<b>1184</b>	1300	---
Sulfur	ppm	ASTM D5185(m)	3000	<b>2926</b>	2769	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>5</b>	3	---
Sodium	ppm	ASTM D5185(m)		<b>5</b>	5	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	<1	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0</b>	0	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>8.4</b>	10.7	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>20.1</b>	23.9	---

# OIL ANALYSIS REPORT







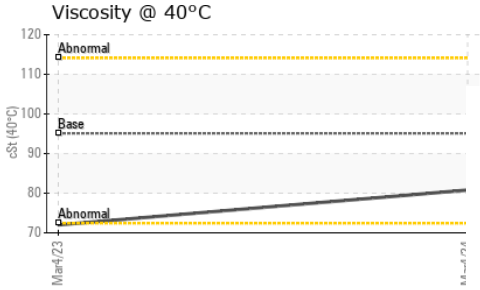
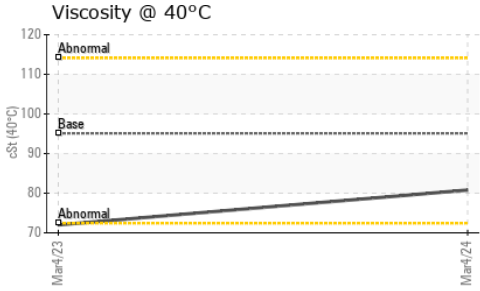


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>17.7</b>	20.0	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	Visual*		<b>NEG</b>	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	95.1	<b>80.8</b>	72.0	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.3	<b>13.1</b>	11.7	---
Viscosity Index (VI)	Scale	ASTM D2270*	169	<b>163</b>	157	---

## GRAPHS

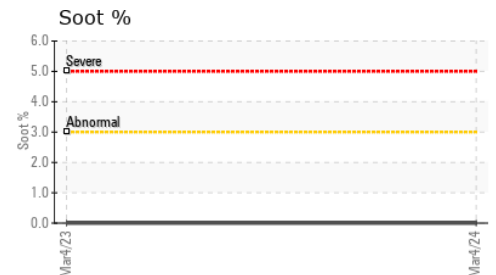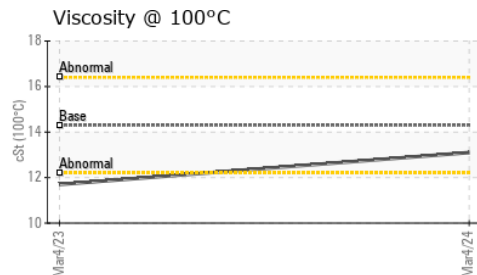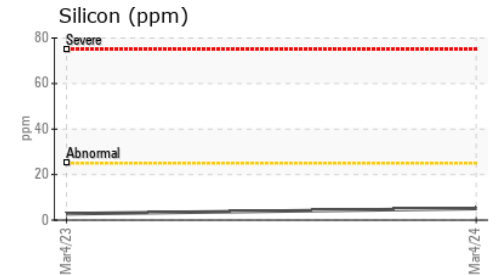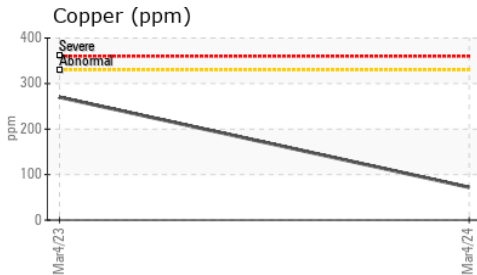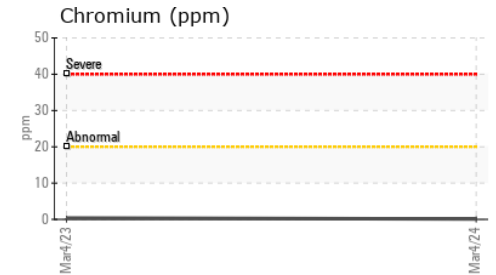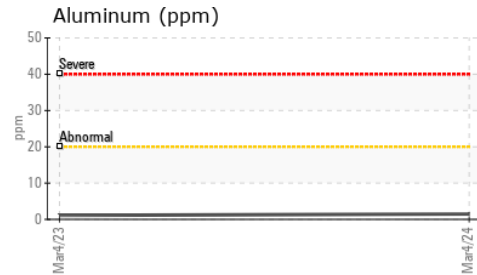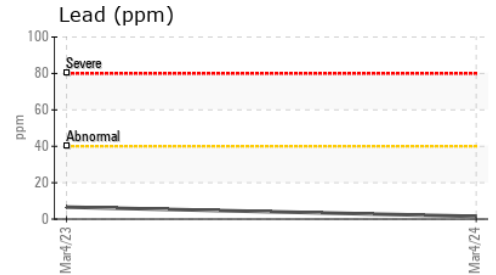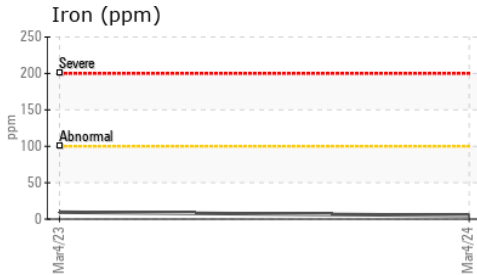

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PC0081738 **Received** : 15 Mar 2024  
**Lab Number** : **02622227** **Tested** : 15 Mar 2024  
**Unique Number** : 5747346 **Diagnosed** : 15 Mar 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: KV40, VI )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**KEJA FARMS**  
 BOX 808  
 ASSINIBOIA, SK  
 CA S0H 0B0  
 Contact: Service Manager  
 JRJ@SASKTEL.NET  
 T: (306)642-8551  
 F: