


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

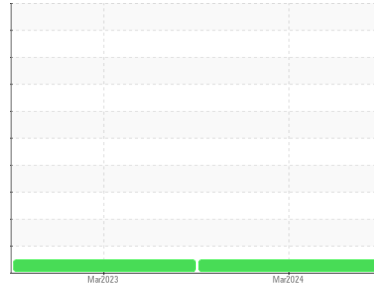

Machine Id
CASE TRIDENT 5550 TRIDENT5550
 Component
Diesel Engine
 Fluid
PETRO CANADA SUPREME SYNTHETIC 5W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PC0081740	PC0064534	---
Sample Date	Client Info		13 Mar 2024	31 Mar 2023	---
Machine Age	hrs	Client Info	973	1790	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		Changed	N/A	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	6	8	---
Chromium	ppm	ASTM D5185(m) >20	<1	<1	---
Nickel	ppm	ASTM D5185(m) >4	<1	<1	---
Titanium	ppm	ASTM D5185(m)	0	<1	---
Silver	ppm	ASTM D5185(m) >3	0	0	---
Aluminum	ppm	ASTM D5185(m) >20	2	2	---
Lead	ppm	ASTM D5185(m) >40	0	<1	---
Copper	ppm	ASTM D5185(m) >330	2	2	---
Tin	ppm	ASTM D5185(m) >15	0	<1	---
Antimony	ppm	ASTM D5185(m)	<1	29	---
Vanadium	ppm	ASTM D5185(m)	0	<1	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 190	46	105	---
Barium	ppm	ASTM D5185(m) 0	0	0	---
Molybdenum	ppm	ASTM D5185(m) 79	59	67	---
Manganese	ppm	ASTM D5185(m)	0	<1	---
Magnesium	ppm	ASTM D5185(m) 564	1105	885	---
Calcium	ppm	ASTM D5185(m) 993	886	1277	---
Phosphorus	ppm	ASTM D5185(m) 763	1037	1196	---
Zinc	ppm	ASTM D5185(m) 835	1201	1260	---
Sulfur	ppm	ASTM D5185(m) 2536	2953	2930	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---



CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	6	5	---
Sodium	ppm	ASTM D5185(m)	8	4	---
Potassium	ppm	ASTM D5185(m) >20	2	1	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	0	0	---
Nitration	Abs/cm	ASTM D7624* >20	8.1	6.2	---
Sulfation	Abs./1mm	ASTM D7415* >30	20.6	19.3	---

OIL ANALYSIS REPORT







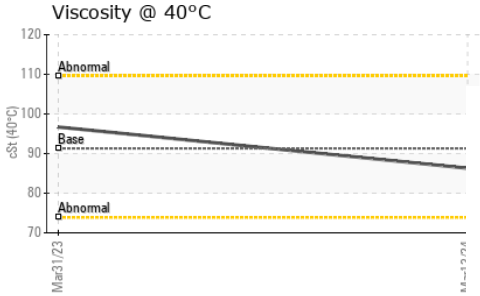
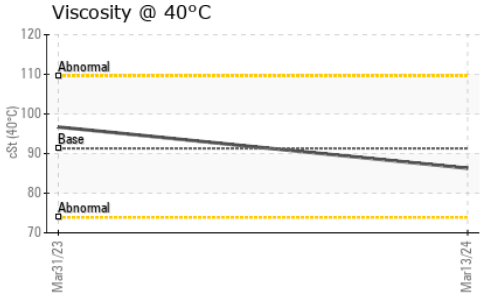


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	17.9	14.5	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	91.3	86.3	96.7	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	13.8	13.6	---
Viscosity Index (VI)	Scale	ASTM D2270*	170	163	141	---

GRAPHS

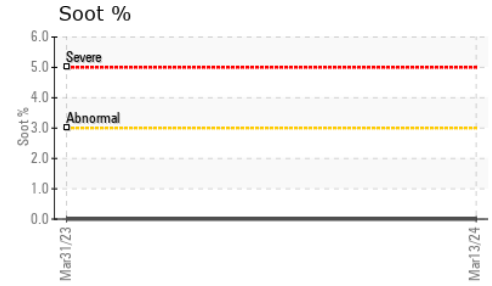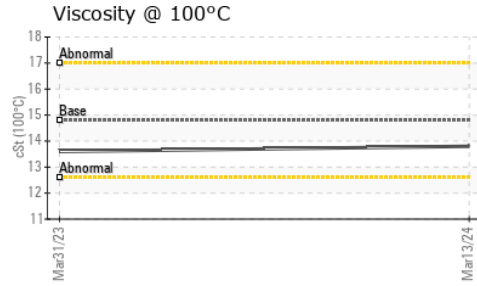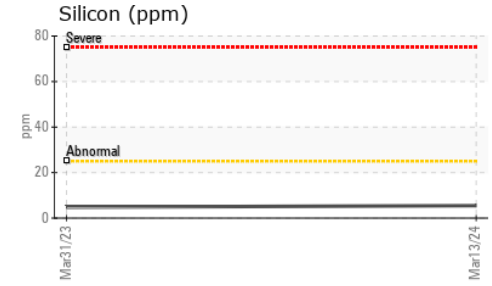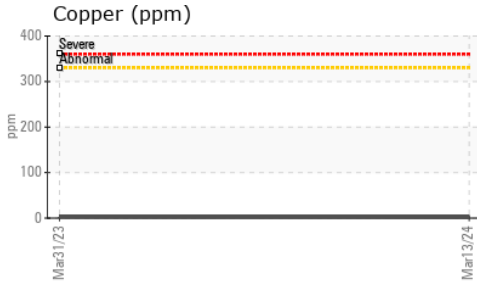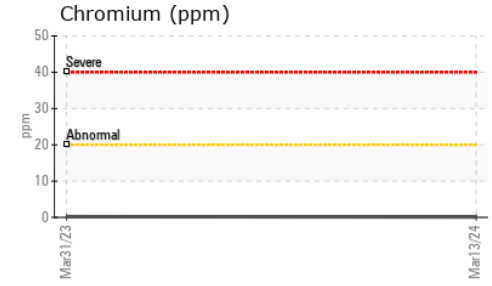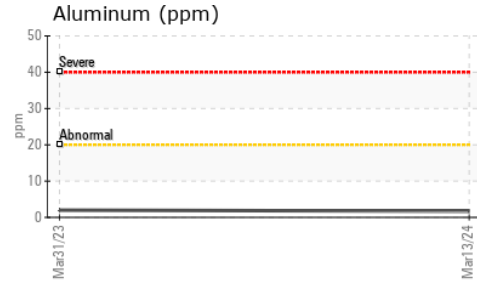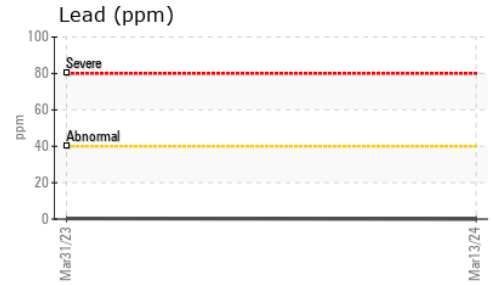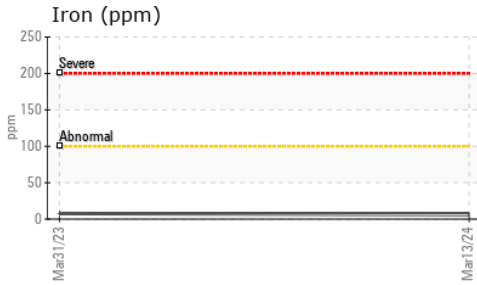

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0081740 **Received** : 15 Mar 2024
Lab Number : **02622228** **Tested** : 15 Mar 2024
Unique Number : 5747347 **Diagnosed** : 15 Mar 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV40, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

KEJA FARMS
 BOX 808
 ASSINIBOIA, SK
 CA S0H 0B0
 Contact: Service Manager
 JRJ@SASKTEL.NET
 T: (306)642-8551
 F: