



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**422104**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0100607</b>	---	---
Sample Date	Client Info		<b>13 Mar 2024</b>	---	---
Machine Age	kms	Client Info	<b>596606</b>	---	---
Oil Age	kms	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	<b>18</b>	---	---
Chromium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m) >4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m) >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >20	<b>3</b>	---	---
Lead	ppm	ASTM D5185(m) >40	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m) >330	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m) >15	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	<b>4</b>	---	---
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 60	<b>59</b>	---	---
Manganese	ppm	ASTM D5185(m) 0	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m) 1010	<b>973</b>	---	---
Calcium	ppm	ASTM D5185(m) 1070	<b>1079</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 1150	<b>1012</b>	---	---
Zinc	ppm	ASTM D5185(m) 1270	<b>1183</b>	---	---
Sulfur	ppm	ASTM D5185(m) 2060	<b>2643</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>3</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>3</b>	---	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624* >20	<b>6.3</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415* >30	<b>18.8</b>	---	---



# OIL ANALYSIS REPORT

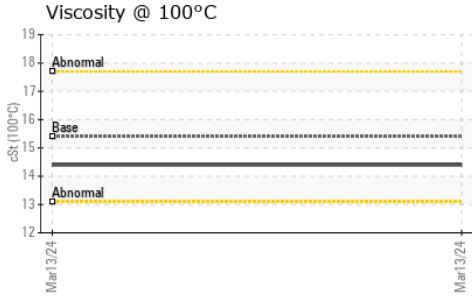

### FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>14.7</b>	---	---









### VISUAL

	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

### FLUID PROPERTIES

	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>14.4</b>	---	---

### GRAPHS

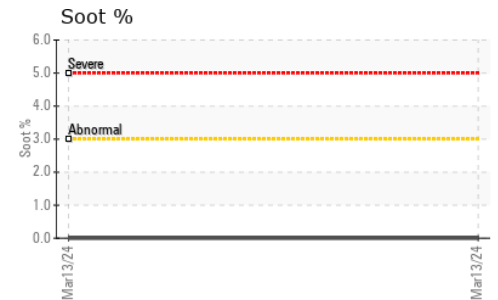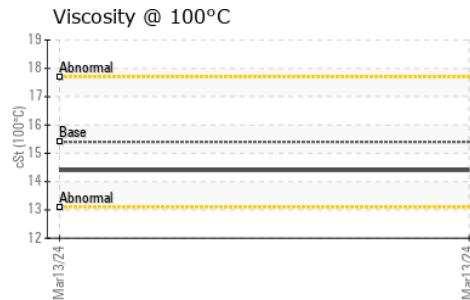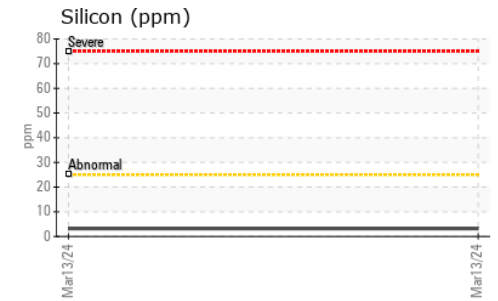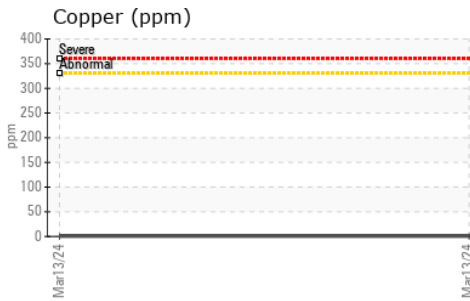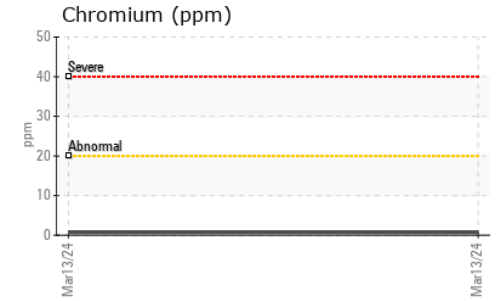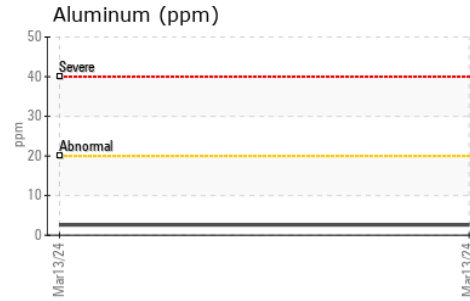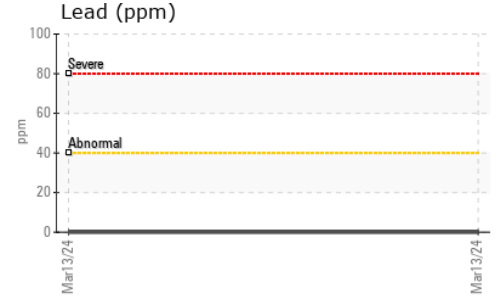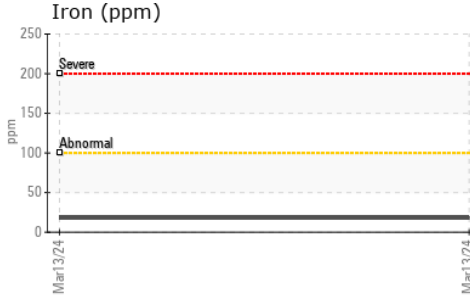

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0100607  
**Lab Number** : 02622307  
**Unique Number** : 5747426  
**Test Package** : MOB 1  
**Received** : 15 Mar 2024  
**Tested** : 15 Mar 2024  
**Diagnosed** : 15 Mar 2024 - Wes Davis

**GFL Environmental - 575 - Squamish Hauling**  
 38950 Queens Way,  
 Squamish, BC  
 CA V8B 0K8  
 Contact: Dean Imbeau  
 dimbeau@gflenv.com  
 T: (604)892-5604  
 F: (604)892-5238

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.